


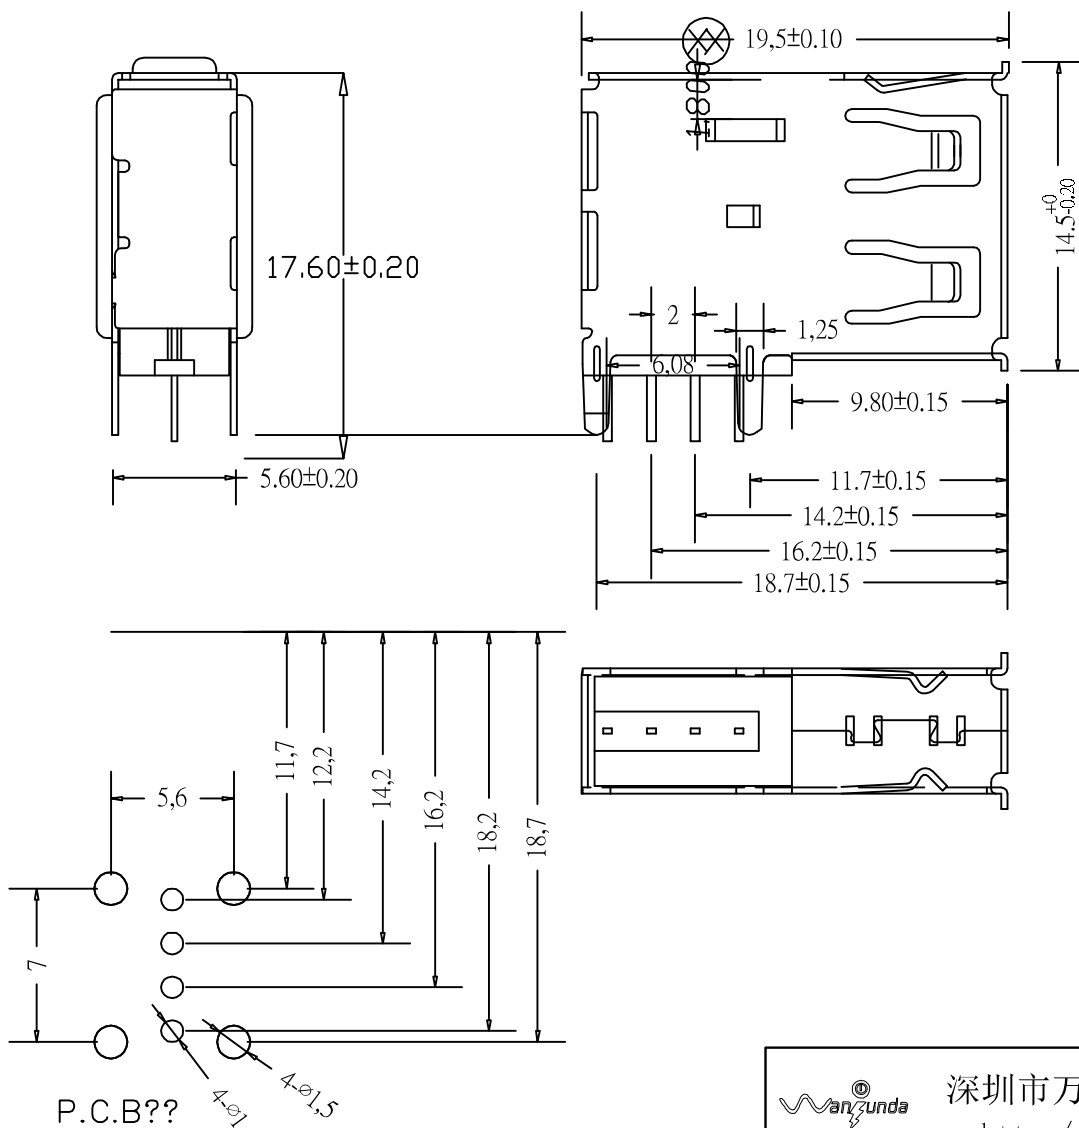

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC At Sea Level
- 绝缘电阻: Insulation Resistance:
1000MΩ ohms MIN

物理性能: Mechanical:


- 插拔力: Connector Mate and Unmate Force
Mate Force: 3.57kgf (MAX)
Unmate Force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:
High Temperature Thermoplastics,
UL 94V-0 LCP White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳: Shell:
Nickel Plating

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号(DWG NO)		单位(UNIT): MM
		版本(REV)		比例(SCALE): 1
品名(ITEM NO)	AF侧插长体表边 直型	日期(DATE)		 未注公差 TOLERANCE UNNOTED
料号(PART NO)	USB2.0-AF-CCS-JB-19.6	设计(DESIGN)		
模号(MODEL NO)		审核(CHECKED)		
		核准(APPROVED)		