


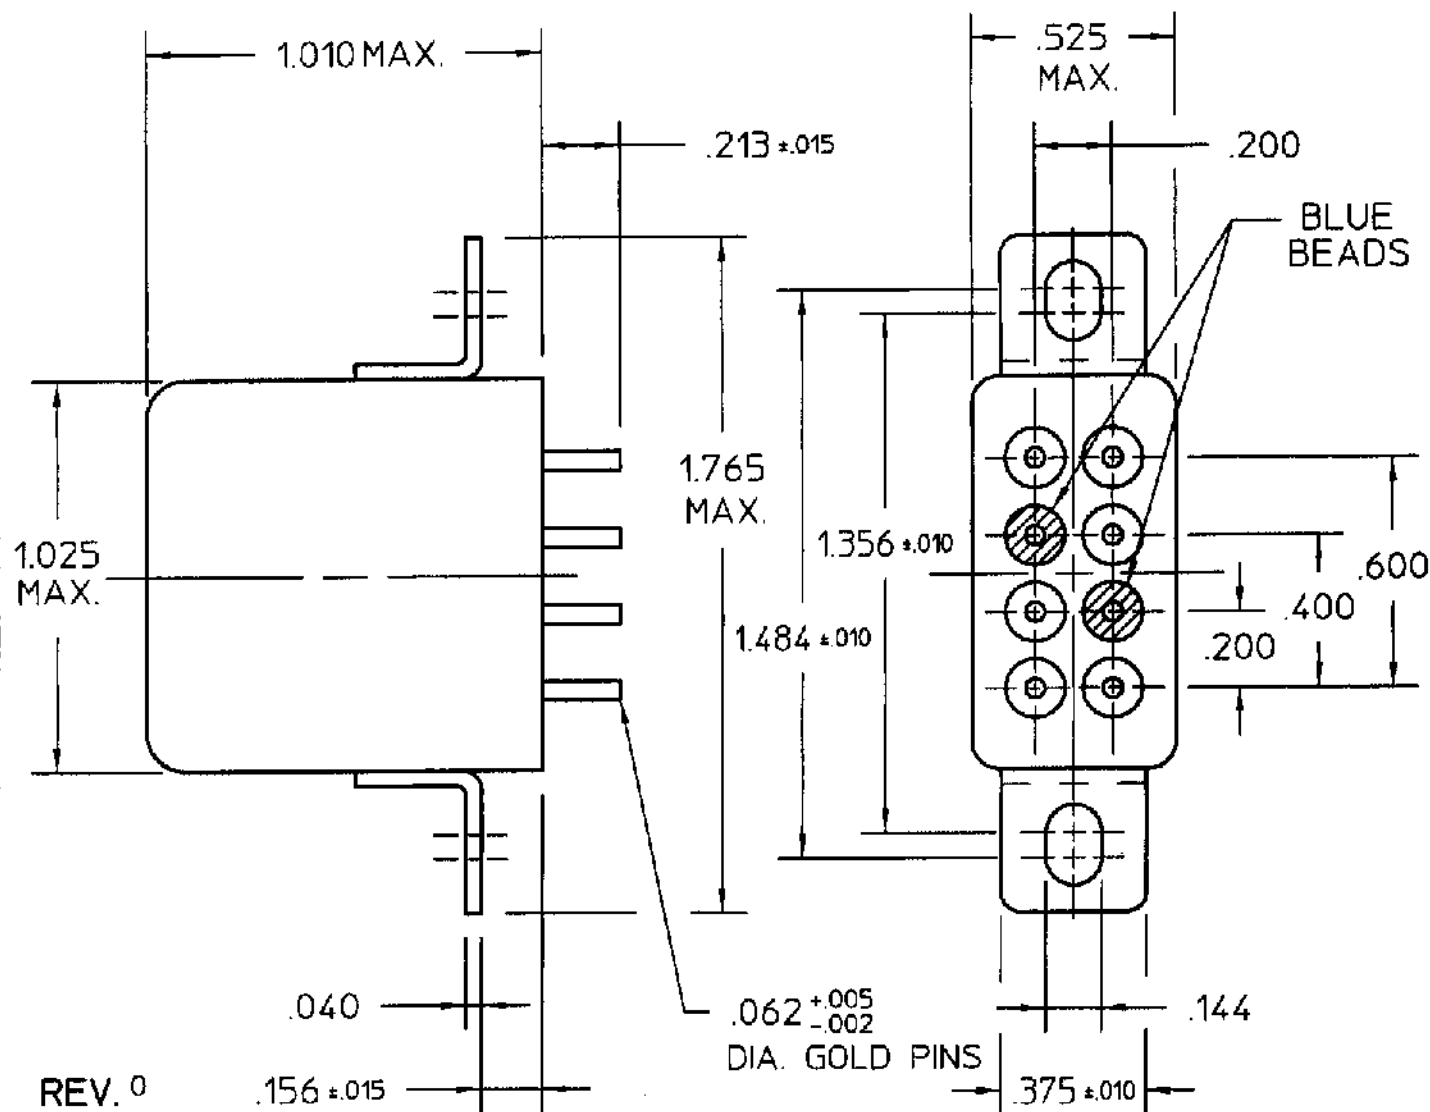


REV. 0  
DCO 102128

COIL: @ 25°C  
RESISTANCE 300 OHMS ± 10%  
NOMINAL VOLTAGE 26.5 VDC  
MUST OPERATE 13.0 VDC  
MUST RELEASE 1.8 VDC

ENVIRONMENT:  
VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
SHOCK 50 g's 11 MS. DURATION  
TEMPERATURE -55 °C TO +85 °C  
NOTES: OPERATE & RELEASE 10 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

# CUSTOMER DATA SHEET

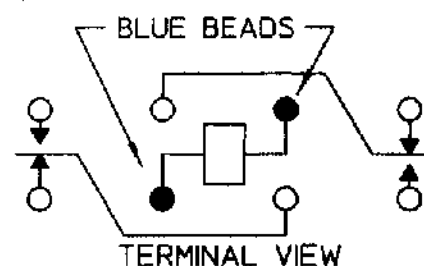

CONTACT RATING: 10 AMPS 28 VDC,  
5 AMPS 115 VAC 400 HZ, RESISTIVE  
100,000 OPERATIONS

DR. PBB 11/30/00 CK. TLG 11-30-00

**CI Technologies**  
advanced control electronics solutions

CUST. C. I. I. STD  
CUST. NO. REV.

"07" RELAY

B07A111BC3