



线路板开孔尺寸

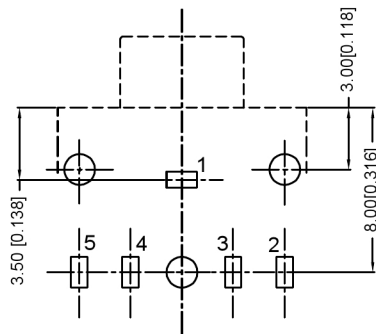

电路原理图





Main technical performance

主要技术性能

1. Rated electrical load: 30V · 0.5A
额定电负荷: 30V·0.5A;
2. Contact resistance: $\leq 0.03 \Omega$
接 触 电 阻: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100m \Omega$
绝缘电阻: $\geq 100M\Omega$;
4. Withstand voltage: AC500V (50Hz) /min
耐 压: AC500V(50Hz)/min;
5. Plugging force: 3~20n
插拔 力: 3~20N
6. Service life: 5000 times
寿 命: 5,000次。

color B:Black R:Red G:Green
CO:Copper Set

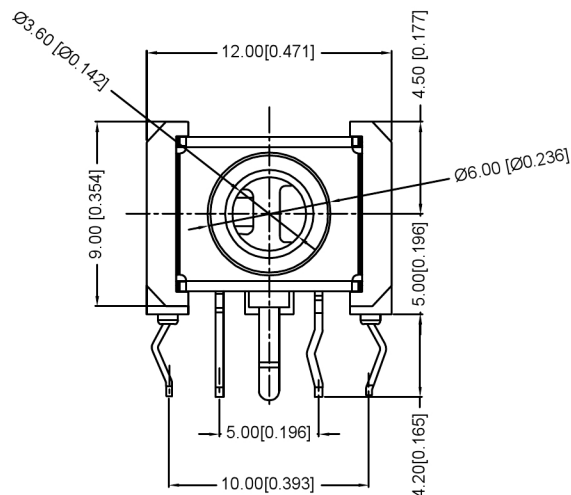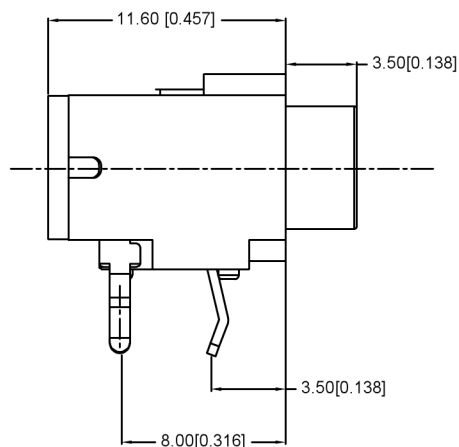

	MATERIAL	PLATING
terminal 1	Brass	D.L1Ag
terminal 2	Phosphor Bronze	D.L1Ag
terminal 3	Phosphor Bronze	D.L1Ag
terminal 4	Phosphor Bronze	D.L1Ag
terminal 5	Phosphor Bronze	D.L1Ag
plastic	PA	

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	PART NO.: PJ-3062-B
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0

广东星坤科技股份有限公司

ΔX		日期
ΔX		
ΔX		
MARK		

文件工程章

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
PTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

		XKB INDUSTRIAL PRECISION CO.,LIMITED	