

AMP | AMP CPC

TE Internal #: 788153-2

Housing, 600 VDC, Wire-to-Wire, 4 Position, Sealable, Wire &

Cable, Plug, Reverse Gender, Pin, Signal, Black, AMP CPC, Circular

Power Connectors

View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors > One-Piece Connector, Sealed, CPC Series 1











Connector Product Type: Housing

Operating Voltage: 600 VDC

Connector System: Wire-to-Wire

Number of Positions: 4

Sealable: Yes

All One-Piece Connector, Sealed, CPC Series 1 (33)

Features

Product Type Features

Connector Seal & Plug Type	Wire Entry Seal
Connector Product Type	Housing
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Plug
Circular Connector Shell Type	All Plastic

Configuration Features

Reverse Numbering	With
Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4



Electrical Characteristics

Operating Voltage	600 VAC
Contact Features	
Reverse Gender	Yes
Contact Type	Pin
Contact Protection	With
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Mating Retention Type	Threaded Coupling
Thread Size	5/8-24 UNEF-2A
Polarization Code	A
Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Retention	With
Panel Mount Feature	Without
Housing Features	
Housing Features Body Orientation	Straight
	Straight Black
Body Orientation	
Body Orientation Housing Color	Black
Body Orientation Housing Color Housing Material	Black Nylon 6/6
Body Orientation Housing Color Housing Material Circular Connector Shell Size	Black Nylon 6/6
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions	Black Nylon 6/6 11
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F]
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F]
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance Operation/Application	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F] Immersion
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance Operation/Application Circuit Application	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F] Immersion Signal
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance Operation/Application Circuit Application Shielded	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F] Immersion Signal
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance Operation/Application Circuit Application Shielded Industry Standards	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F] Immersion Signal No
Body Orientation Housing Color Housing Material Circular Connector Shell Size Usage Conditions Operating Temperature Range Fluid Resistance Operation/Application Circuit Application Shielded Industry Standards UL Flammability Rating	Black Nylon 6/6 11 -55 – 105 °C[-67 – 221 °F] Immersion Signal No



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

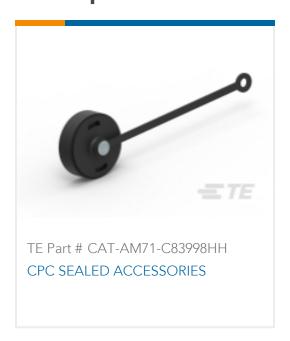







CPC Cable Clamps One-Piece Connector, Sealed, CPC



TE Part # CAT-AM71-T98 Circular Connector, Environmentally Pin and Socket Contacts, Type II



TE Part # 206516-1 TE Part # CAT-AM71-C83998K CPC PLUG ASSEMBLY SIZE 11-4 Sealed, CPC Series 6

Series 1





TE Part # CAT-AM71-T98D Pin and Socket Contacts, Type III, LP **EMEA**



TE Part # CAT-AM71-T98A Strip Pin and Socket Contacts, Type III,



TE Part # CAT-AM71-T98G Pin and Socket Contacts, Type III, LP, High Current



TE Part # CAT-AM71-T98B Strip Pin and Socket Contacts, Type III



TE Part # CAT-AM71-T98F Strip Pin and Socket Contacts, Type III, High Current



TE Part # 81665-3 ECONOSEAL, FLANGE GASKET



TE Part # 91542-1 CCII TYPE III+ PIN SKT 24-22 ASSY



ASSY



TE Part # 91519-1 CCII TYPE III+ PIN SKT 18-14 ASSY



TE Part # 91505-1 CCII TYPE III+ 24-16 ASSY




TE Part # 58495-1 PRO CRIMPER ASSY MULTIMATE



CCII TYPE III+ PIN SKT 24-16 ASSY

Also in the Series | AMP CPC

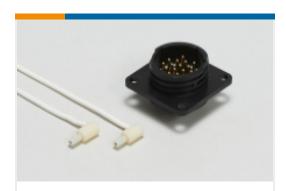

Circular Power Connectors(458)



Connector Backshells(1)



Connector Caps & Covers(19)



Connector Contacts(6)



Connector Hardware(12)



Connector Seals & Cavity Plugs(36)




Connector Strain Relief(60)



Insertion & Extraction Tools(1)



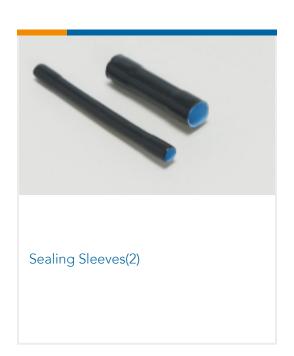

Customers Also Bought
















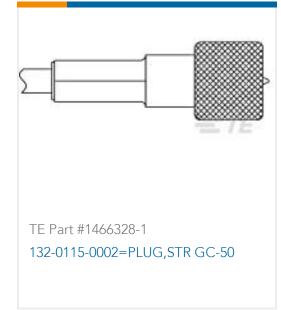

Documents

Product Drawings

SLD CPC PLUG ASSY,11-4,REV SEX

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_788153-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_788153-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_788153-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing, 600 VDC, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Plug, Reverse Gender, Pin, Signal, Black, AMP CPC, Circular Power Connectors



Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Product Specifications

Product Specification

English