
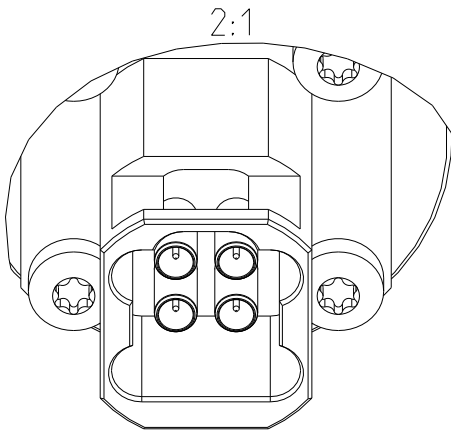


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL DRAWING	02FEB2018	BM	LB
	A1	ECR-21-005161	06MAY2021	BM	MP

Radio frequency characteristics	
Interface type	3.5mm Pin per IEC 60169-23 / MATE-AX plug
Frequency range	DC to 9GHz
Impedance	50Ω
Return loss, min. -mated with adapter 1-523216-1 -perfect axial alignment is mandatory -TDR gated (lowpass step)	30 dB @ DC to 1 GHz 25 dB @ 1 to 2 GHz 20 dB @ 2 to 9 GHz
Mechanical characteristics	
Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy / gold plated
Insulation	PS, cross linked polystyrene
Other metallic parts / surface finish	aluminium / passivated copper alloy /nickel plated, silver-plated stainless steel
Marking	Logo, Rev., Order No., Prod. date, Serial no.
Recommended torque (3.5mm socket)	0.9NM ± 10%
Engagement force, approx.	22N
Disengagement force, approx.	18N
Matings, max.	500
Environmental conditions	
Storage	
Ambient temperature range	-40 to +70 °C
Relative humidity	95% (non-condensing)
Scope of delivery and accessories and Application	
Scope of delivery	Adapter and Datasheet packed in a box
Application	MATE-AX, 4 pos. Socket Hsg. 2298721, 2310886

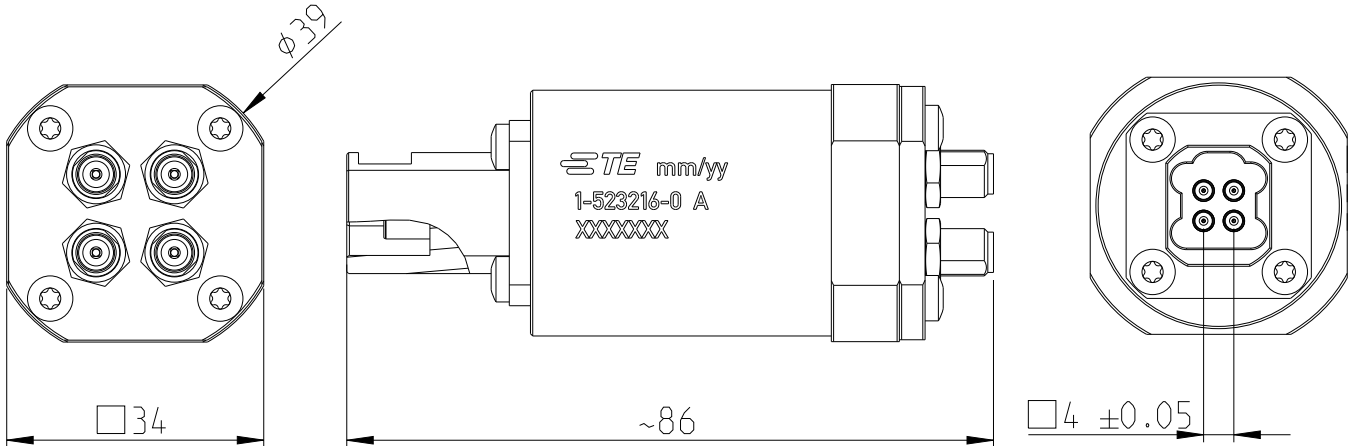

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. Muth	02FEB2018	TE Order No. 1-523216-0		
		CHK L. Bauer	02FEB2018	 TE Connectivity		
		APVD L. Bauer	02FEB2018			
		PRODUCT SPEC		NAME MATE-AX, HF-ADAPTER, 4 POS PIN-RPC 3.50 SOCKET		
		APPLICATION SPEC				
		WEIGHT	~110g	SIZE A3	CAGE CODE 00779	DRAWING NO 1-523216-0
		CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1	REV A1