


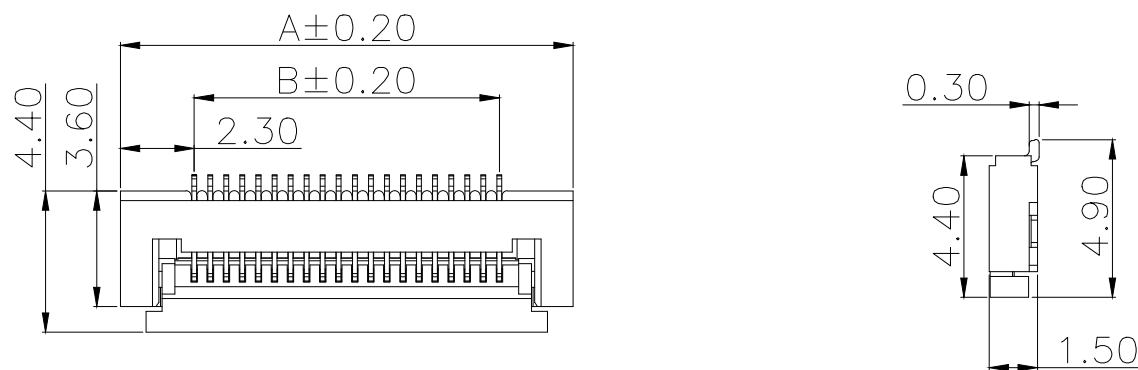

NOTES:

额定电流 Current rating: 0.5A



额定电压 Voltage rating: 50V

耐电压 Withstand voltage: 500V AC/minute

接触电阻 Contact resistance :≤40mΩ


绝缘电阻 Insulation resistance: 100MΩ MIN

工作温度 Working temperature: -25℃ ~ +85℃

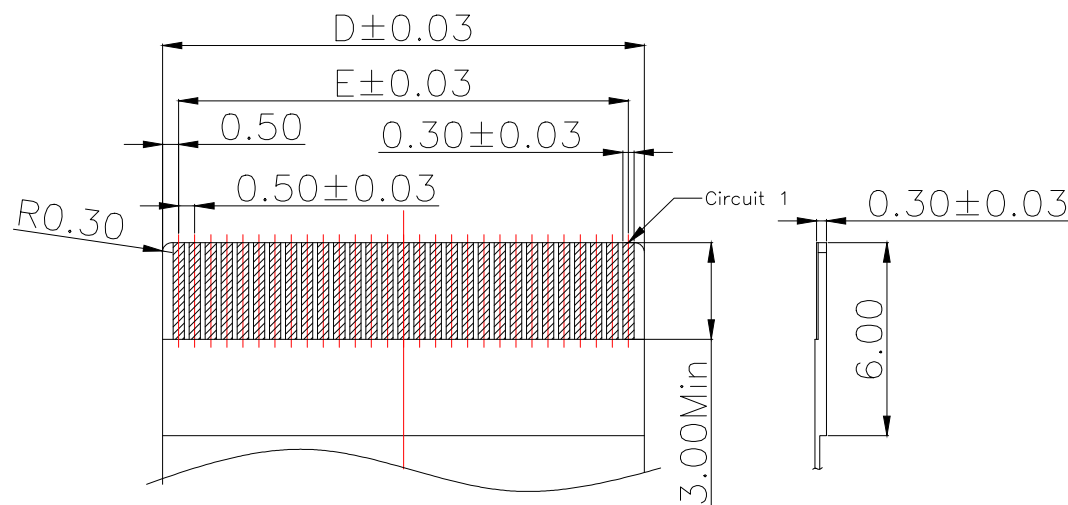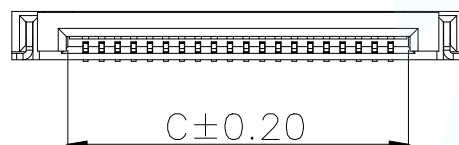

RECOMMENDED FPC/FFC DIMENSION

Part No	Pin	A	B	C	D	E	F
FPC-05F-6PH15	6	7.1	2.5	3.6	3.5	2.5	2.5
FPC-05F-8PH15	8	8.1	3.5	4.6	4.5	3.5	3.5
FPC-05F-10PH15	10	9.1	4.5	5.6	5.5	4.5	4.5
FPC-05F-12PH15	12	10.1	5.5	6.6	6.5	5.5	5.5
FPC-05F-14PH15	14	11.1	6.5	7.6	7.5	6.5	6.5
FPC-05F-16PH15	16	12.1	7.5	8.6	8.5	7.5	7.5
FPC-05F-20PH15	20	14.1	9.5	10.6	10.5	9.5	9.5
FPC-05F-24PH15	24	16.1	11.5	12.6	12.5	11.5	11.5
FPC-05F-26PH15	26	17.1	12.5	13.6	13.5	12.5	12.5
FPC-05F-28PH15	28	18.1	13.5	14.6	14.5	13.5	13.5
FPC-05F-30PH15	30	19.1	14.5	15.6	15.5	14.5	14.5
FPC-05F-40PH15	40	24.1	19.5	20.6	20.5	19.5	19.5
FPC-05F-50PH15	50	29.1	24.5	25.6	25.5	24.5	24.5

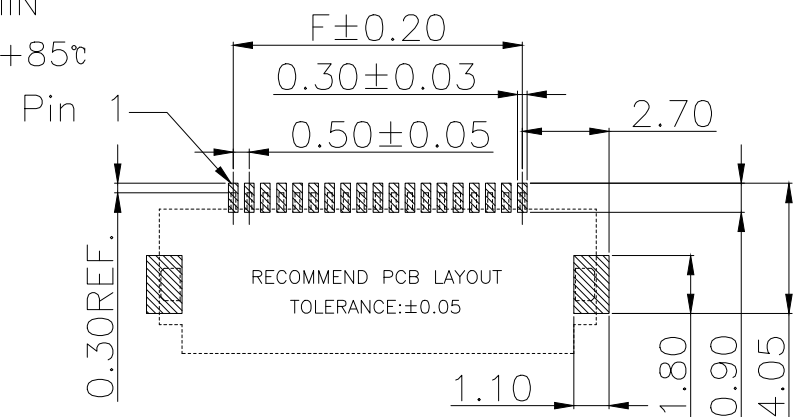

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: FPC 0.5PH H1.5 前翻下接	
DECIMALS:	ANGLES:	PAR	FPC-05F-NPH15
.X:±0.35	.X':±3°	DWN	
.XX:±0.25	.XX':±2°	CHKD	
.XXX:±0.15		APVD	
CUSTOMER COPY		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A