

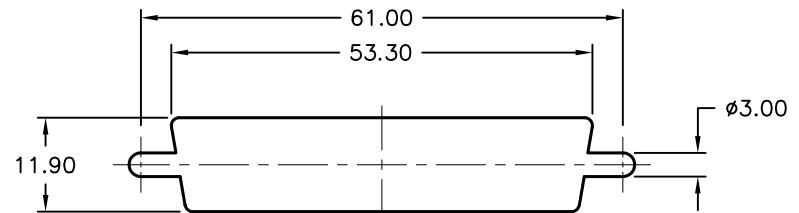
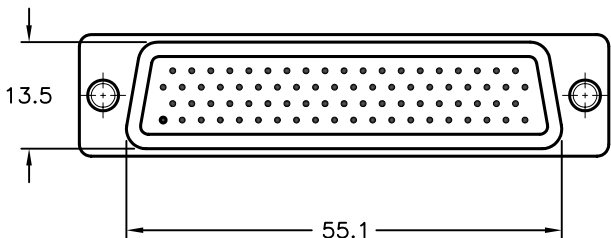
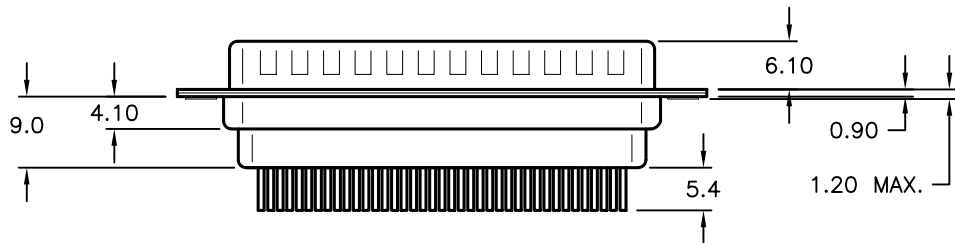


	ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. SPC--F005.DWG			REVISIONS			DOC. NO. SPC--F005 * Effective: 7/8/02 * DCP No: 1398					
				DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
				1876	A	RELEASED	EO	07/25/06	SA	07/25/06	HO	07/25/06

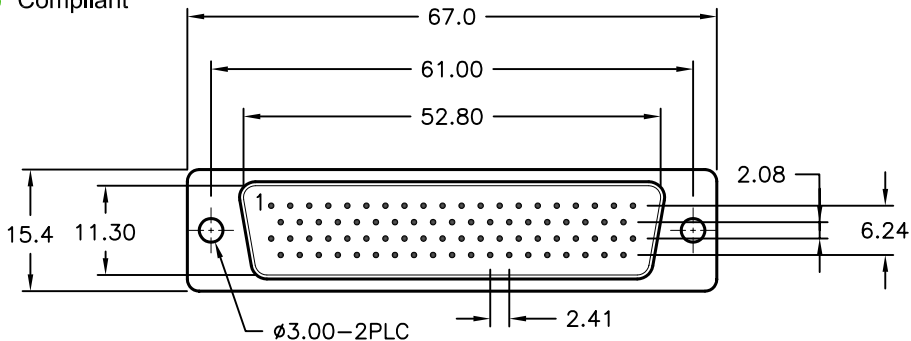

PANEL CUTOUT

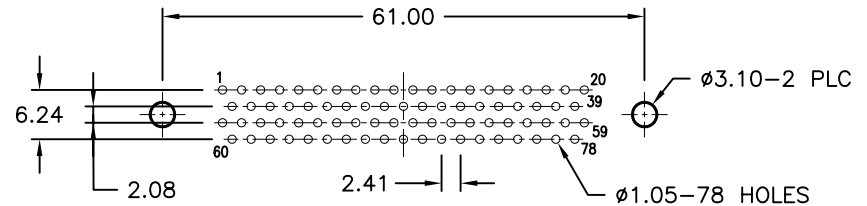

PCB LAYOUT

Specifications:

1. Shell: Steel, Tin Plated
2. Insulator: PBT +30% Fiber Glass, Black
UL94V-0 Rated
3. Contact: Brass, Machined-Pin Gold Plated
over Nickel
4. Current Rating: 5 AMPS
5. Contact Resistance: 15 miliohms Max
6. Insulation Resistance: 1000 Megohms Min
7. Voltage: 500 VAC for 1 Minute
8. Temperature: -50°C to +100°C

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.	TOLERANCES: Unless Otherwise Specified .X ±0.35 [0.014] .XX ±0.15 [0.006]	DRAWN BY:	DATE:	DRAWING TITLE: 78 Pin High-Density D-Sub DIP Plug			
		EKLAS ODISH	07/25/06				
		CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
		SAMI ALNADI	07/25/06	A	SPC15386	79K4969.DWG	A
		APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: mm [INCHES]	SHEET: 1 OF 1
		HISHAM ODISH	07/25/06				