


Actuator

704.407.018

Distribution by
DigiKey

DigiKey

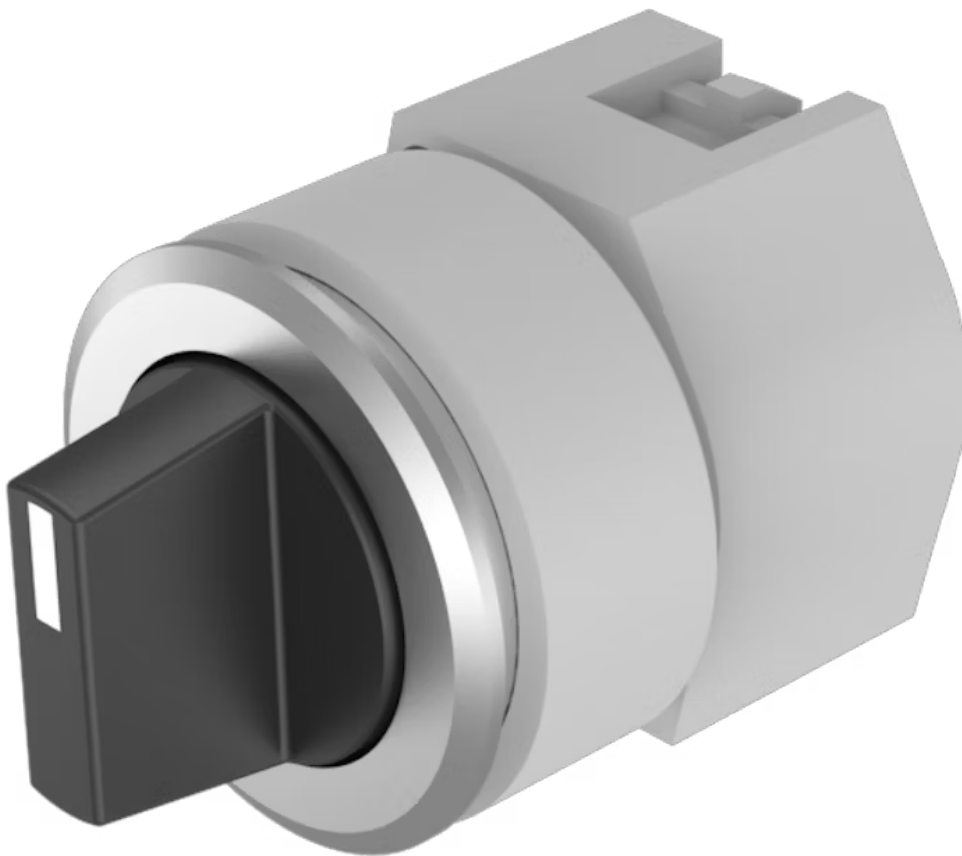

<https://digikey.eao.com/p/704.407.018>

Your product:



704.407.018 Actuator

FRONT

Front dimension: Ø 35 mm

Front bezel material: Aluminium

Front bezel colour: Nature

MOUNTING

Mounting cut-out: Ø 30.5 mm

Design: flush

OPERATING-/INDICATION PART

Lever colour: Black

Lever material: plastic

Lever shape: short

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

MECHANICAL CHARACTERISTIC

Switching angle:	42° left / 42° right
Switching positions:	3 positions
Weight:	0.056 kg
Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching action:	Maintained - Rest - Momentary

AMBIENT CONDITION

Operating temperature:	– 40 °C ... + 55 °C
IP Protection:	IP65 front side
Storage temperature:	– 40 °C ... + 85 °C


OTHER

max. number of switching elements:	3
---	---

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, non illuminative, Black, short, Nature, Aluminium, anodised, Maintained - Rest - Momentary

Hints: Max. 3 switching elements can be clipped on

Mounting cut-outs:

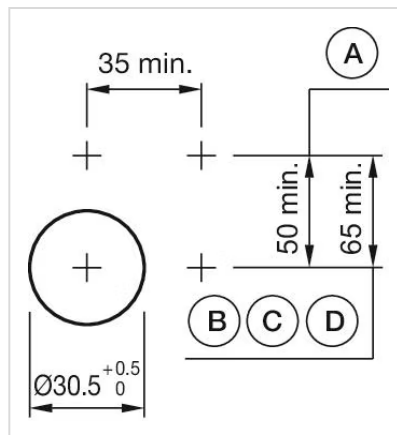

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Switching positions:

A = Screw terminal