




Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers > PVC Wiring Duct: 2 meters, Gray Color, Flame-Retardant

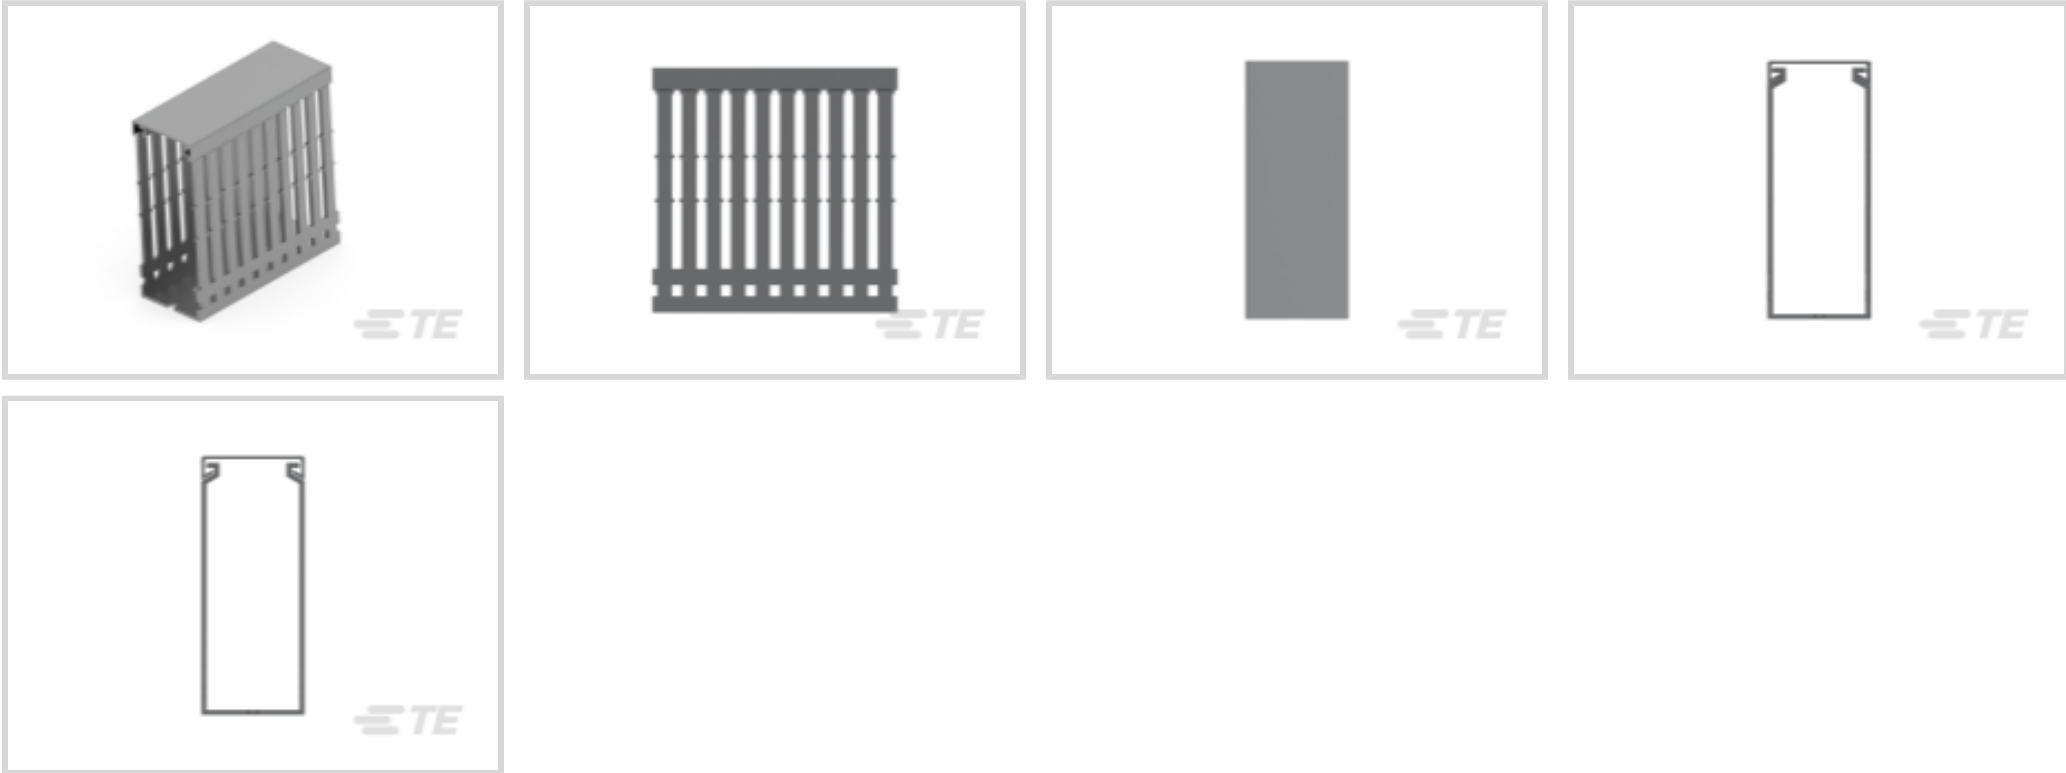

Wiring Duct Product Type: **Wiring Duct**

Primary Product Material: **PVC**

Product Height: **100 mm [3.937 in]**

Product Length: **2000 mm [78.74 in]**

Product Width: **40 mm [1.575 in]**

[All PVC Wiring Duct: 2 meters, Gray Color, Flame-Retardant \(23\)](#)

Features

Product Type Features

Wiring Duct Product Type	Wiring Duct
--------------------------	-------------

Body Features

Primary Product Color	Gray
Primary Product Material	PVC

Dimensions

Product Height	100 mm[3.937 in]
Product Length	2000 mm[78.74 in]
Product Width	40 mm[1.575 in]

Usage Conditions

Operating Temperature Range	-5 – 60 °C[23 – 140 °F]
-----------------------------	-------------------------

Packaging Features

Packaging Quantity	14
--------------------	----



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SET411202R0000
WD-1-CP-GR040



TE Part # CAT-Z62-W1-RT
Wiring Duct Accessories: PVC and LSHF Ranges, Black, Gray



TE Part # 1SET411402R0000
WD-1-TL-0002



TE Part # 1SET411403R0000
WD-1-TL-0003

1SET411012R0000

Wiring Duct, PVC, Height 100 mm [3.937 in], Length 2000 mm [78.74 in], Width 40 mm [1.575 in], -5 – 60 °C [23 – 140 °F]





TE Part # 1SET411404R0000
WD-1-TL-0004



TE Part # 1SET411401R0000
WD-1-TL-0001



TE Part # 1SET411407R0000
WD-1-TL-0007

Customers Also Bought



TE Part #1SET411001R0000
PVC Wiring Duct: 2 meters, Gray Color, Flame-Retardant



TE Part #1SNK505066R0000
ZS4-BK




TE Part #1SNK506010R0000
ZS6




TE Part #1SNK506210R0000
ZS6-D2




TE Part #1SNK510010R0000
ZS16



TE Part #1SNK516010R0000
ZS35



TE Part #1SNK505020R0000
ZS4-BL



TE Part #1SNK526010R0000
ZS95

Documents

Product Drawings

WD-1-DP-GR4010

French

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET411012R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411012R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411012R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

1SET411012R0000

Wiring Duct, PVC, Height 100 mm [3.937 in], Length 2000 mm [78.74 in], Width 40 mm [1.575 in], -5 – 60 °C [23 – 140 °F]



Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Datasheet - Entrelec Electrical-Solutions

Datasheet - ENTRELEC-wiring-duct-DS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals

Agency Approval Document

English