
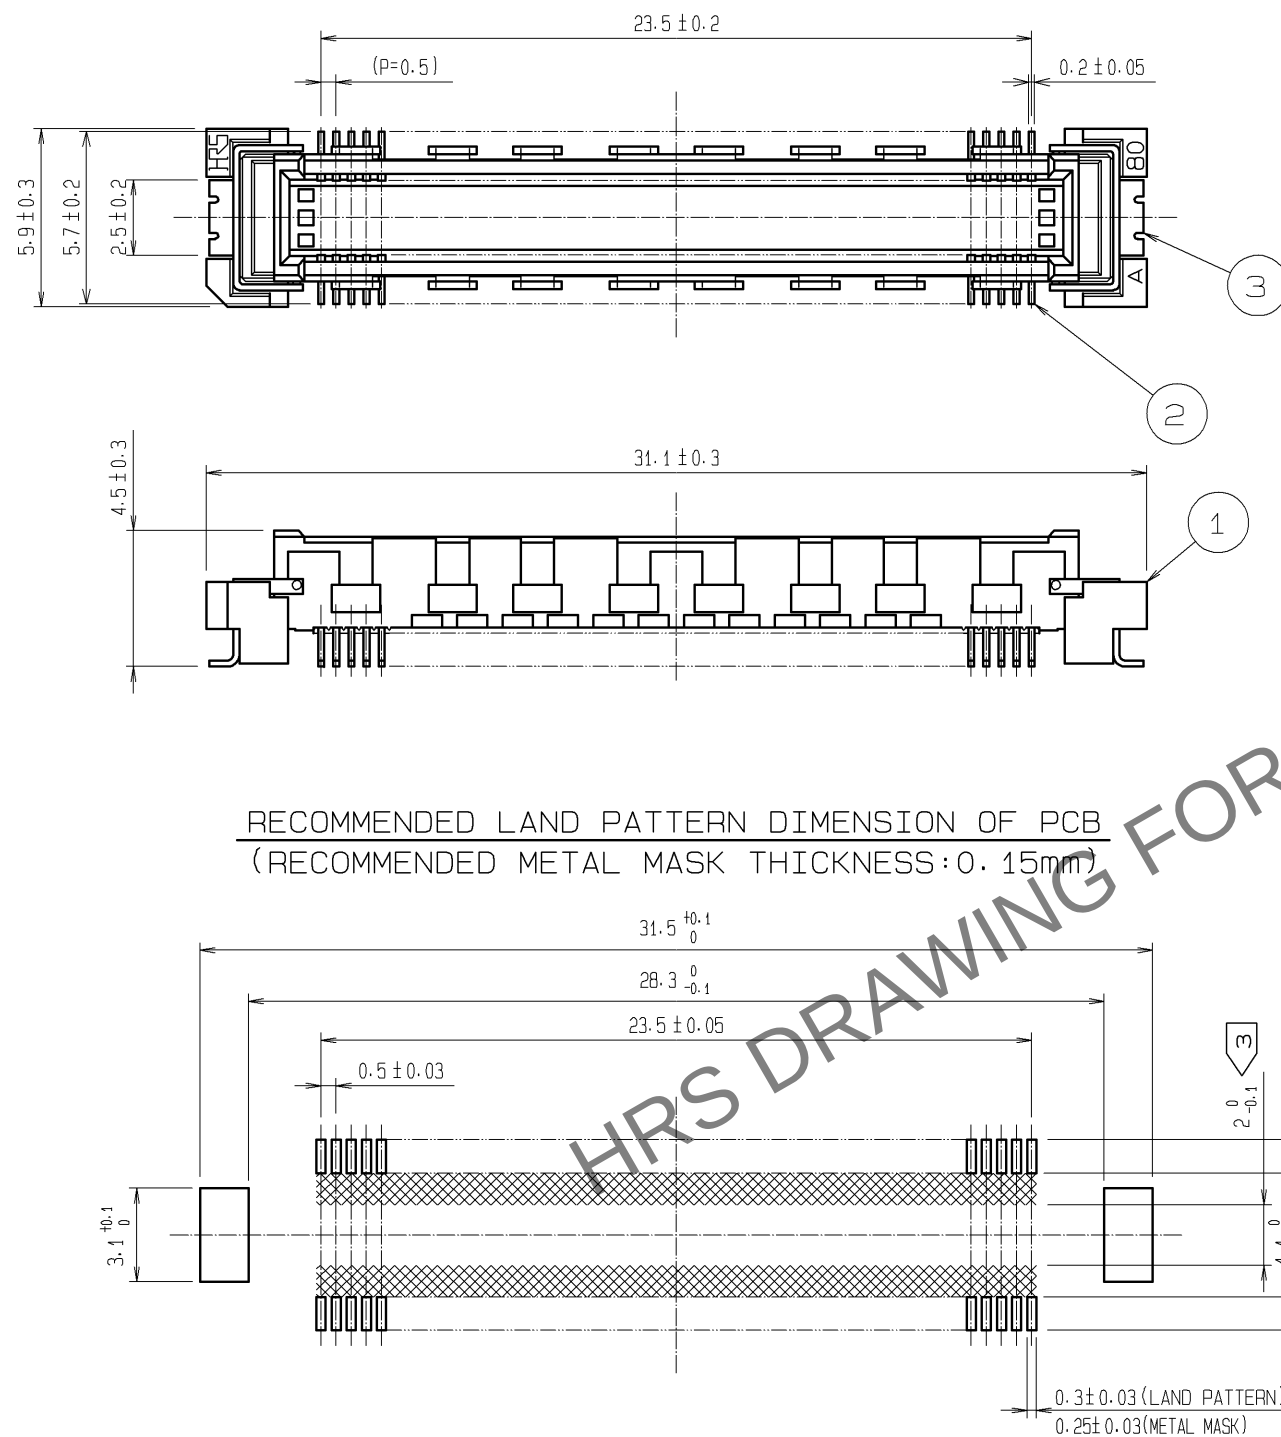


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

				3		PHOSPHOR BRONZE	TIN-PLATING			
				2		PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.			
							LEAD AREA:TIN-PLATING 1μm min.			
							UNDER PLATING:NICKEL 1μm min.			
1	LCP		BEIGE		UL94V-0					
NO.	MATERIAL		FINISH		REMARKS		NO.	MATERIAL	FINISH	REMARKS
UNITS			SCALE		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm			4 : 1							
 HIROSE ELECTRIC CO., LTD.			APPROVED	:HS. OKAWA		09.04.14		DRAWING NO. EDC3-151972-25		
			CHECKED	:HT. YAMAGUCHI		09.04.14		PART NO. FX10B-96P-SV1(71)		
			DESIGNED	:SY. KAMIGA		09.04.14		CODE NO. CL570-0151-8-71		
			DRAWN	:HK. SUNADORI		09.04.13				
										