

Sealing ring

3xx UG

Sealing ring SBR/NBR, multiple perforation

Properties

Temperature range

- single part for use in combination with other components

-30 °C



+100 °C

Comment

assembled in series:

metric: 19.5xxMxx, 23.6xxMxx

Pg: 19.5xx, 23.6xx, 21.1xx

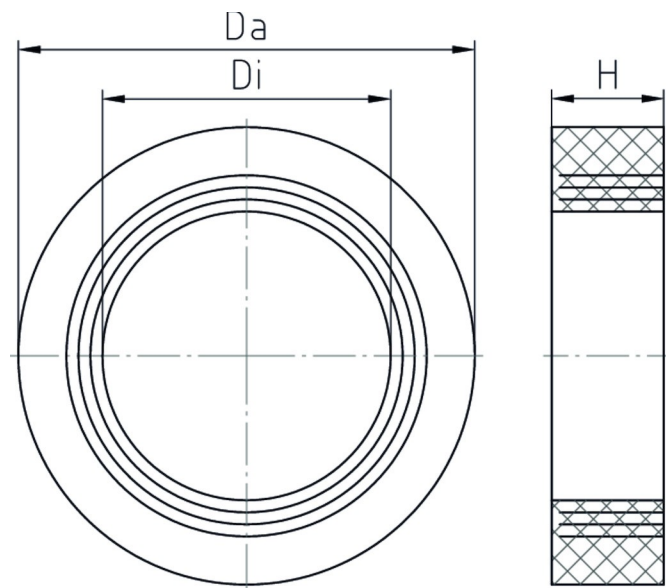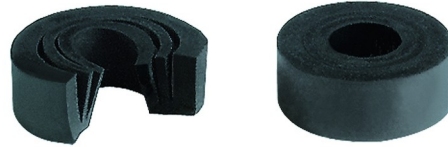

Features

Size	H	Da	Di	 VPE	Part No.
09/12	5,5	13,3	5x7,5x10	100	309 UG
11/16	6	16,5	7,5x10x12,5	100	311 UG
13/20	6	18,3	7,5x10x12,5	100	313 UG
16/25	7	20,4	7,5x10x12,5 x15	50	316 UG
21/25	8	25,9	10x13x16x1 9	50	321 UG
29/32	9,5	34,7	18x21x24x2 7	25	329 UG
36/50	12	44,7	24x27x30x3 3	10	336 UG
42/50	14	51,7	30x33x36x3 9	5	342 UG-30
48/63	14	56,9	36x39x42x4 5	5	348 UG-36

