

2856265

https://www.phoenixcontact.com/us/products/2856265

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Base element for protective plug PT with surge voltage device protection for the power supply unit and one 2-wire floating signal circuit, mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Your advantages

- · Maximum ease of maintenance, thanks to the 2-piece design
- · Easy selection for all possible demands in MCR applications with a complete product portfolio
- · The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

Commercial data

Item number	2856265
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	CL21
Product key	CL2111
Catalog page	Page 123 (C-4-2019)
GTIN	4017918819675
Weight per piece (including packing)	52.326 g
Weight per piece (excluding packing)	45.729 g
Customs tariff number	85363010
Country of origin	DE



2856265

https://www.phoenixcontact.com/us/products/2856265

Technical data

Product properties

Product type	Base element
Product family	PLUGTRAB PT
Туре	DIN rail module, two-section, divisible
Number of positions	2
Surge protection fault message	none
Wire pairs per module	1
Data management status	
Article revision	11

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm
Conductor cross section flexible	0.2 mm ² 2.5 mm ²
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section AWG	24 12
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.8 Nm
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section AWG	24 12

Dimensions

Dimensional drawing	90 91 90 90 117.7 111.51
Width	17.7 mm
Height	90 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module width	17.7 mm
Complete module height	90 mm
Complete module depth	65.5 mm

Material specifications

Color	black (RAL 9005)
	Copper color



2856265

https://www.phoenixcontact.com/us/products/2856265

Flammability rating according to UL 94	V-0
Mechanical properties	
Mechanical data	
Open side panel	No
Protective circuit	
Information technology	
Surge protection fault message	none
Ambient conditions	
Degree of protection	IP20
	IP20 -40 °C 85 °C
Degree of protection	
Degree of protection Ambient temperature (operation)	
Degree of protection Ambient temperature (operation) Standards and regulations	-40 °C 85 °C
Degree of protection Ambient temperature (operation) Standards and regulations Standards/specifications	-40 °C 85 °C EN 61643-21/A1
Degree of protection Ambient temperature (operation) Standards and regulations Standards/specifications Note	-40 °C 85 °C EN 61643-21/A1





2856265

https://www.phoenixcontact.com/us/products/2856265

Drawings

Dimensional drawing

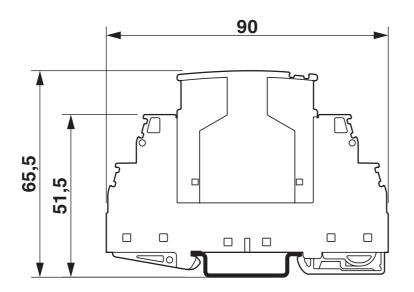

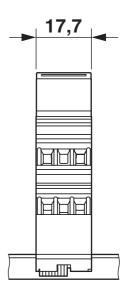

The figure shows the complete module consisting of a base element and connector



2856265

https://www.phoenixcontact.com/us/products/2856265

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2856265



EAC

Approval ID: EAC-Zulassung



EAC

Approval ID: RU C-DE.*09.B.00169



2856265

https://www.phoenixcontact.com/us/products/2856265

Classifications

ECLASS

	ECLASS-11.0	27130803
	ECLASS-13.0	27171592
ETIM		
	ETIM 9.0	EC002497
UNSPSC		
	UNSPSC 21.0	39121600



2856265

https://www.phoenixcontact.com/us/products/2856265

Environmental product compliance

EU RoHS

20 1.01.0	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com