
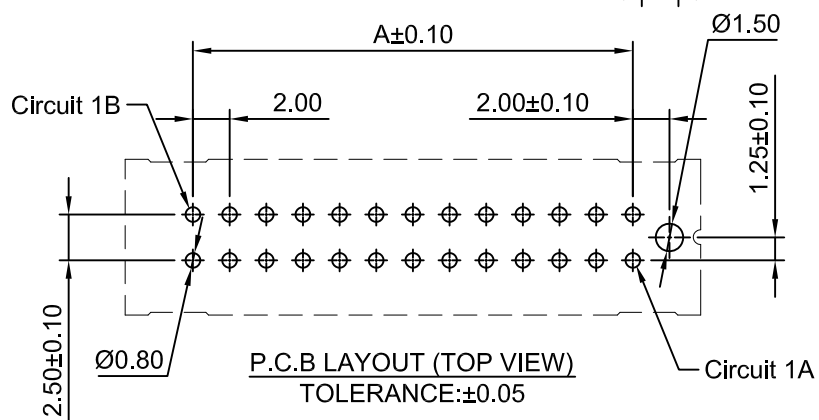
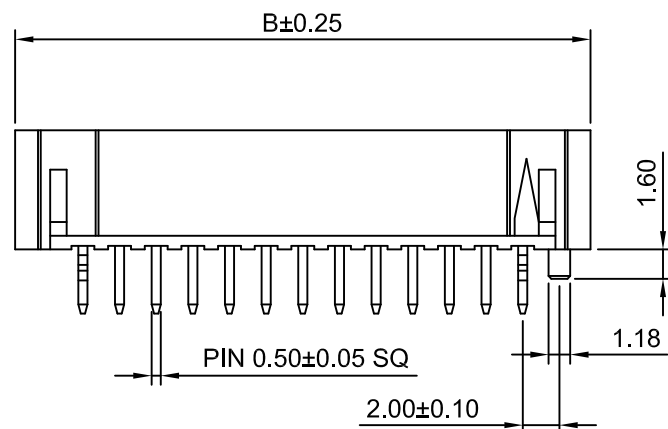


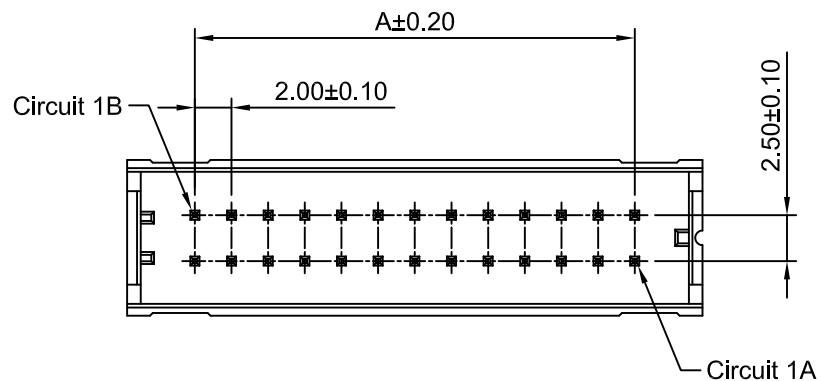

Ordering Information:
A2010WVA-F-2xXP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0



GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

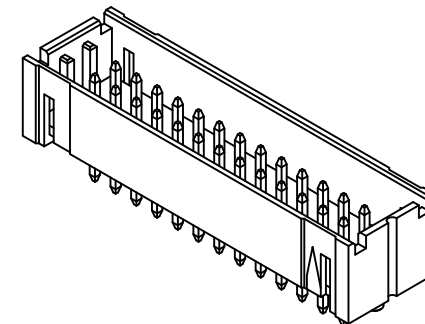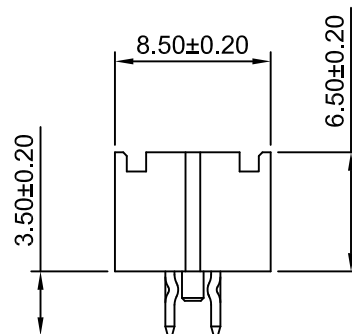

SPECIFICATIONS:

Current Rating: 2.5A AC,DC (AWG #22)

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	9.40	2x12P	22.00	29.40
2x3P	4.00	11.40	2x13P	24.00	31.40
2x4P	6.00	13.40	2x14P	26.00	33.40
2x5P	8.00	15.40	2x15P	28.00	35.40
2x6P	10.00	17.40	2x16P	30.00	37.40
2x7P	12.00	19.40	2x17P	32.00	39.40
2x8P	14.00	21.40	2x20P	38.00	45.40
2x9P	16.00	23.40	2x25P	48.00	55.40
2x10P	18.00	25.40	2x30P	58.00	65.50
2x11P	20.00	27.40			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2021.02.25
A4	CHANGE THE CURRENT & VOLTAGE	2020.04.22
A3	CHANGE THE FIRST CIRCUIT	2019.10.10
A2	CHANGE THE DRAWING	2018.12.11
A1	MOD IFY THE SIZE	2017.04.28
A0	NEW RELEASE	2015.05.25
REV	DESCRIPTION	DATE

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHKD	APPR	2.00mm PITCH 180° DUAL ROW DIP WAFER	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2010WVA-F-2xXP	A5