
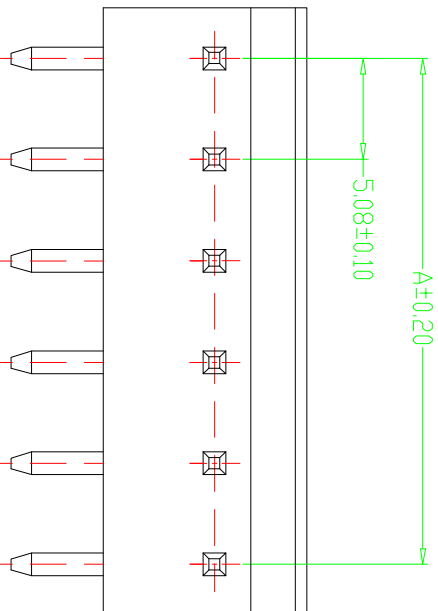
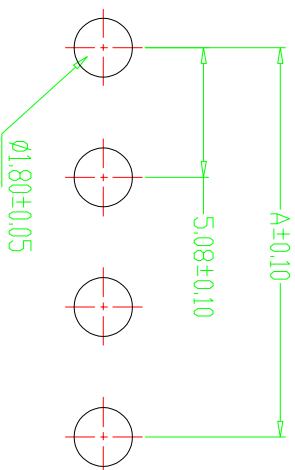


SPECIFICATIONS

- Current Rating: 7A AC, DC
- Voltage Rating: 250V AC, DC
- Temperature Range: -25℃~+85℃
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500V AC/minute
- Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

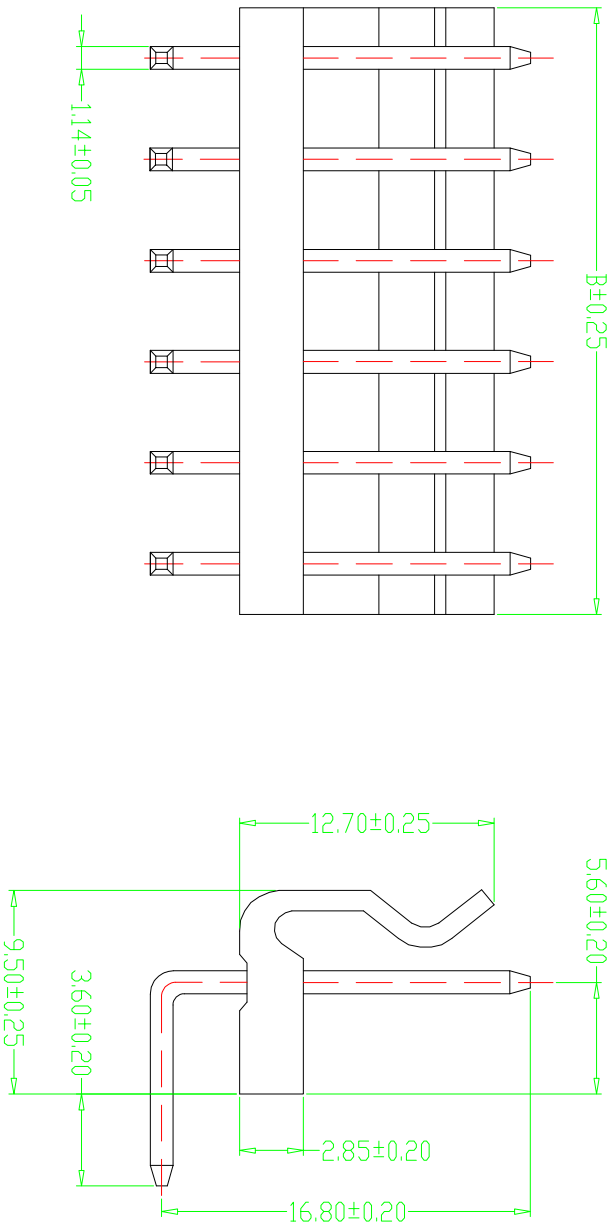

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A5801-02AWG	5.08	10.16
A5801-03AWG	10.16	15.24
A5801-04AWG	15.24	20.32
A5801-05AWG	20.32	25.40
A5801-06AWG	25.40	30.48
A5801-07AWG	30.48	35.56
A5801-08AWG	35.56	40.64
A5801-09AWG	40.64	45.72
A5801-10AWG	45.72	50.80
A5801-11AWG	50.80	55.88
A5801-12AWG	55.88	60.96
A5801-20AWG	96.52	101.60

单位	UNIT	TH	泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>	
比例	SCALE			
$x \pm 0.5$	$x \pm$	标准:	版本: A0	产品名称
$x \pm 0.30$	$x \pm$	核准:	页次: 1/1	5.08高弯 WATER DIP TYPE
$.xx \pm 0.20$	$.xx \pm$	制图:	日期:	产品料号
$.xxx \pm 0.005, xxx \pm$	$.xxx \pm$	封文:	客户料号	TH-A5081-AWG
		日期:	客户料号	
		日期:	客户料号	