
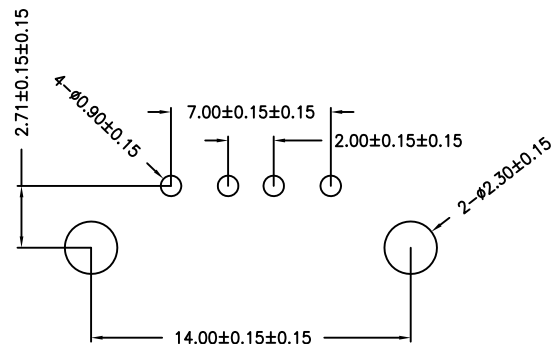
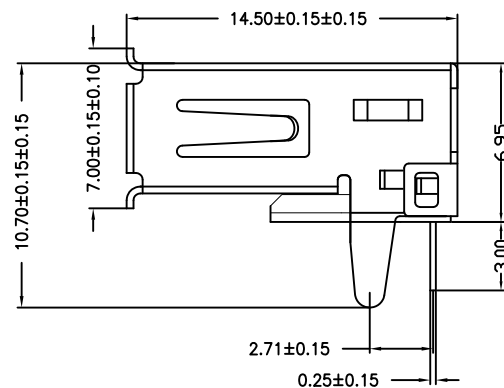
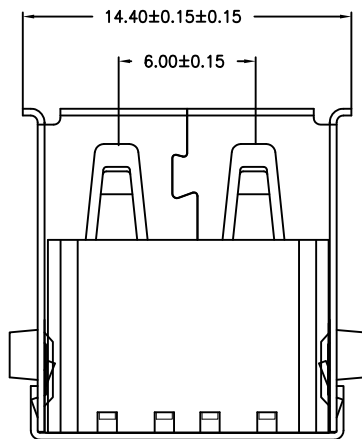


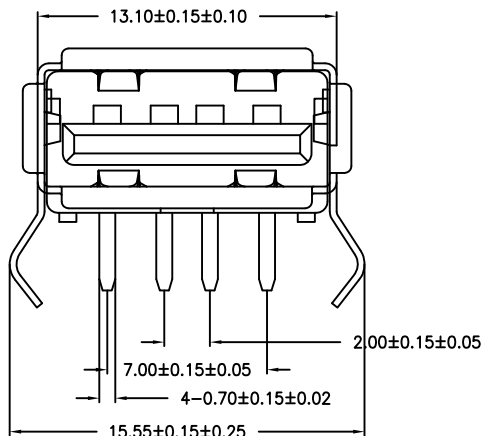

RBCOMMENDBD P.C.B PATTBRN LAYO UT

MAPX

MODIFICATION

DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位

UNITS

MM

制图

DRAWING

Z-Y-B

制图料号

PRODUCT PART NO.

901-132B1013D10211

比例

SCALE

1:1

审核

CHKD

产品名称

PRODUCT NO.

AF90度外扣弯脚有边内弹铜壳

14.5反向一型加宽PBT白胶

日期

DATE

2013.07.25

核准

APPD

角法

VIEW

版本

VER

A0