



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.26	阿树

A


B

C


D

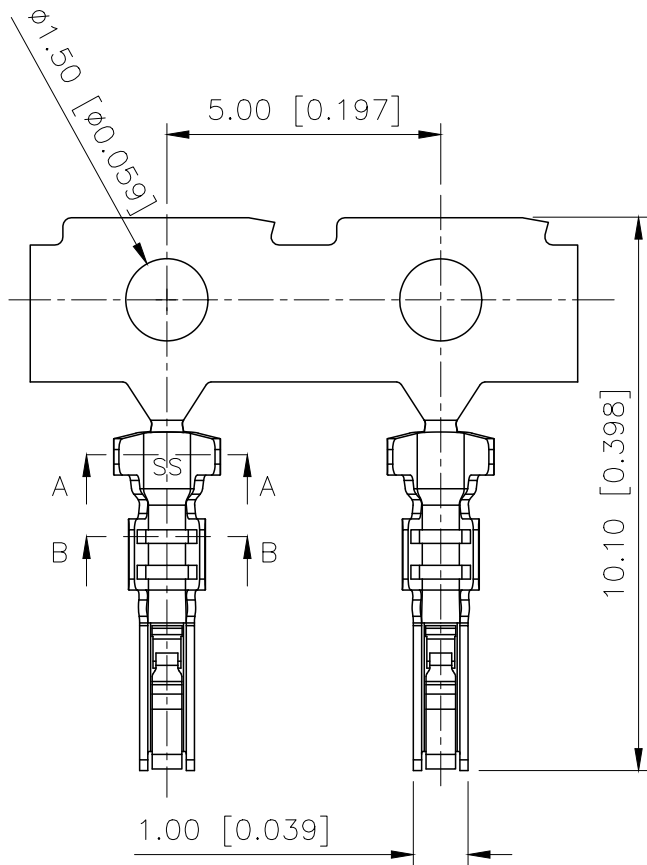

SECTION:A-A
SCALE:1:1

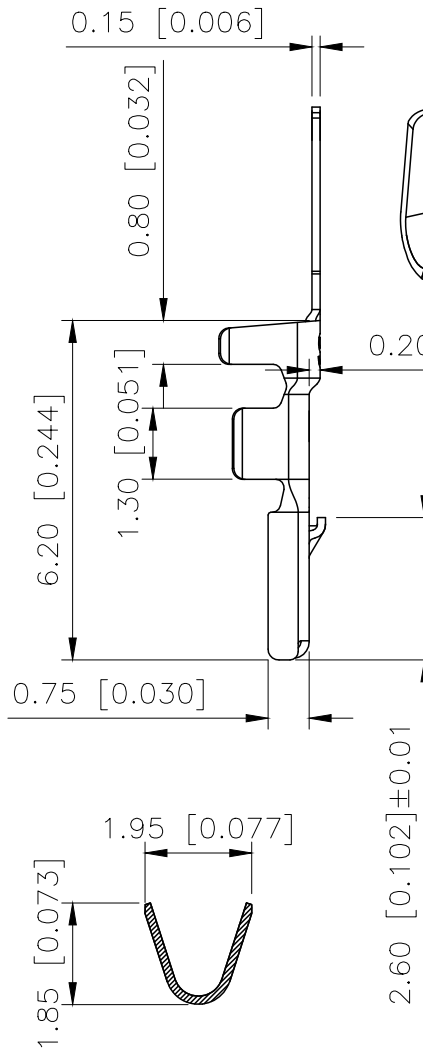

SECTION:B-B
SCALE:1:1

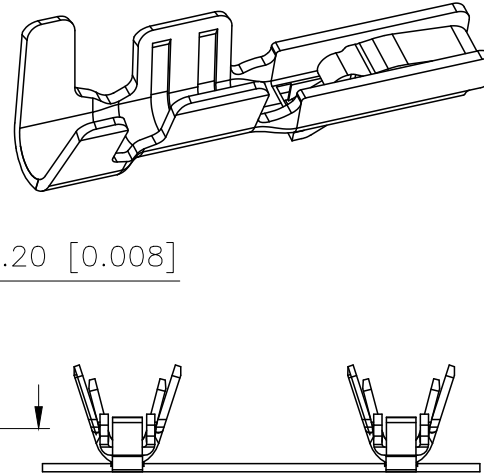

Specifications:

规格:

Voltage rating:125V AC/DC

额定电压: 125V AC/DC

Current rating:2A AC/DC

额定电流: 2A AC/DC

Contact Resistance: $\leq 20\text{M}\Omega$

接触电阻: $\leq 20\text{M}\Omega$

Insulation Resistance: $\geq 500\text{M}\Omega$

绝缘电阻: $\geq 500\text{M}\Omega$

Dielectric strength:800V AC/minutenai

耐压: 800V AC/minute

PART NO.:

X1506 I-P XX
① ② ③ ④

①Series Number.

②Category: T-terminal

③Material: P-Phosphor bronze

④Plating style:V01-Gold Flash;
SN-Bright Tin Plating

X1506T-PV01	Phospor Bronze	AWG#24-28	1.0mm(MAX)	Stamping Pating 30u"Ni Whole Gold Flash	X1506H
X1506T-PSN				Stamping Before Pating:30u" Ni 70u"Sn Min	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.50mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X1506T-PXX
APPROVED		SIZE:	A4	DWG NO.: