

Page
1 / 2

OPTIONS: INDICATOR /SELF CUT-OFF

FREQUENCY RANGE : 0 - 3 GHz
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 1	1 - 2	2 - 3
V.S.W.R. <=	1.15	1.20	1.25
INSERT. LOSS <=	0.15 dB	0.20 dB	0.25 dB
ISOLATION >=	85 dB	80 dB	75 dB
AVER. POWER (*)	400 W	300 W	240 W

ACTUATOR	: LATCHING
NOMINAL CURRENT AT 25° C (±10%)	: 125 mA
ACTUATOR VOLTAGE (Vcc)	: 28V (24 to 30V) / POSITIVE COMMON
TERMINALS	: solder pins (250 Deg.C max./30 sec)
INDICATOR RATING	: 1 W / 30 V / 100 mA
SELF CUT-OFF TIME	: 40 ms < CT < 120 ms

CONNECTORS	: BNC female	per MIL C 39012
LIFE	: 2.500.000	cycles
SWITCHING TIME (nominal voltage;25° C)	: < 15	ms
CONSTRUCTION	: splashproof	
WEIGHT	: < 215	g

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85



(* : average power at 25° C)

DRAWING

General tolerance: ± 0,5 mm


R577 263010

Page
2/2

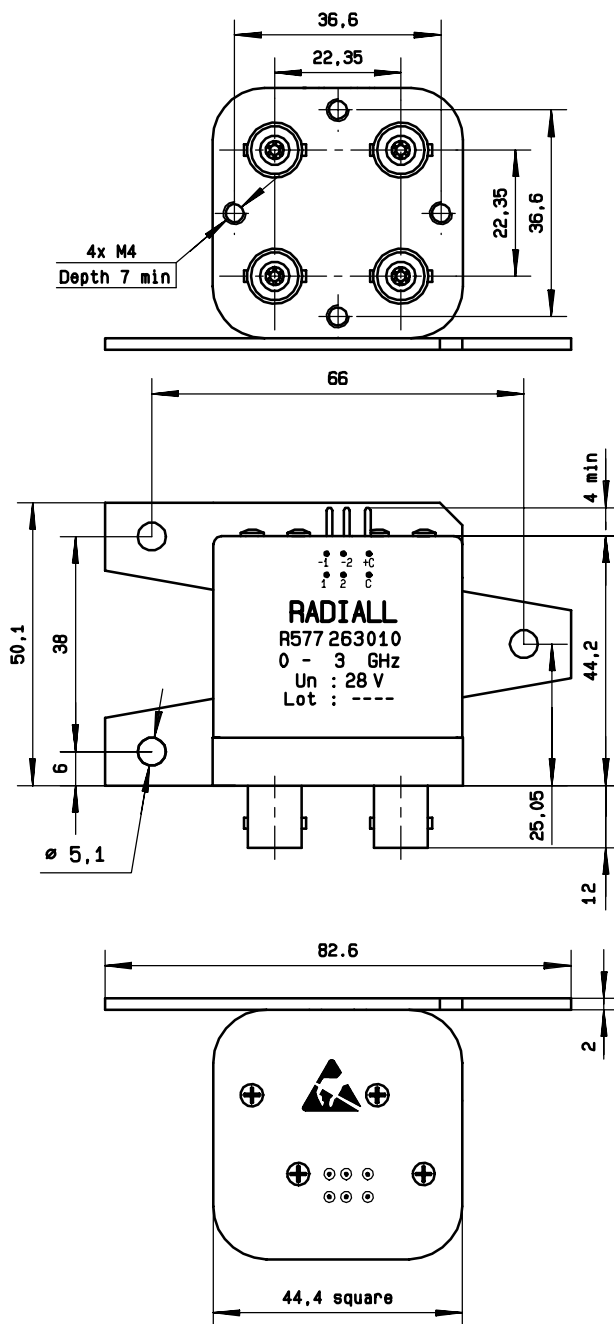

SCHEMATIC DIAGRAM

Voltage	RF continuity	Indicator
+ C - 1	1↔3 2↔4	C . 1
+ C - 2	1↔2 3↔4	C . 2

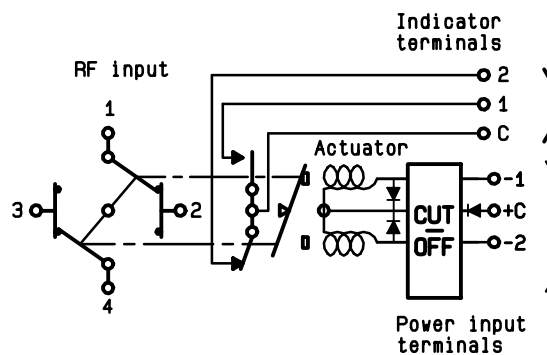

ISSUE 22. jan.08

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R577263010