
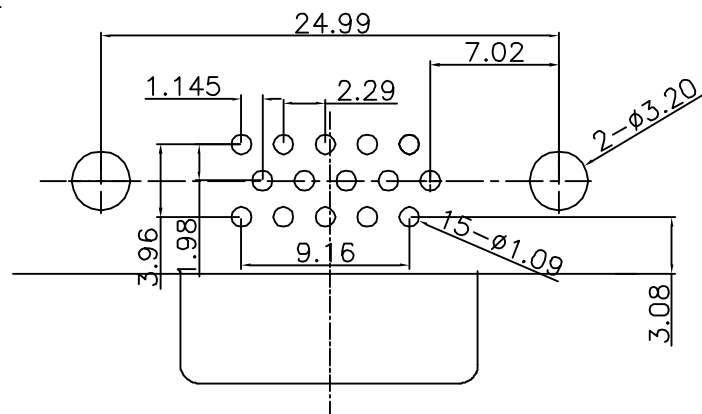
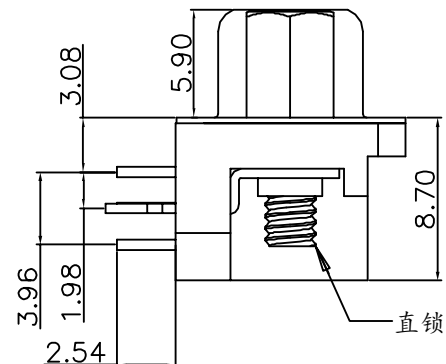
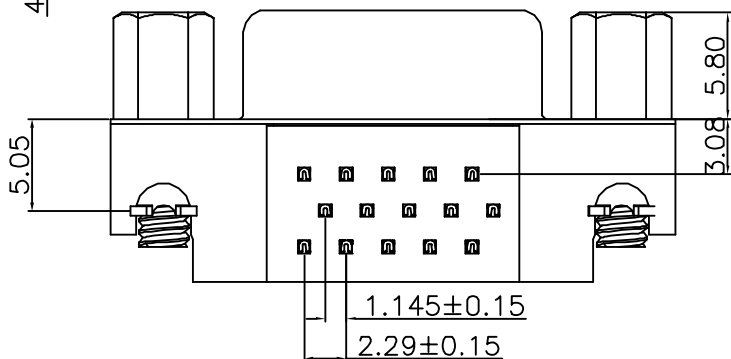


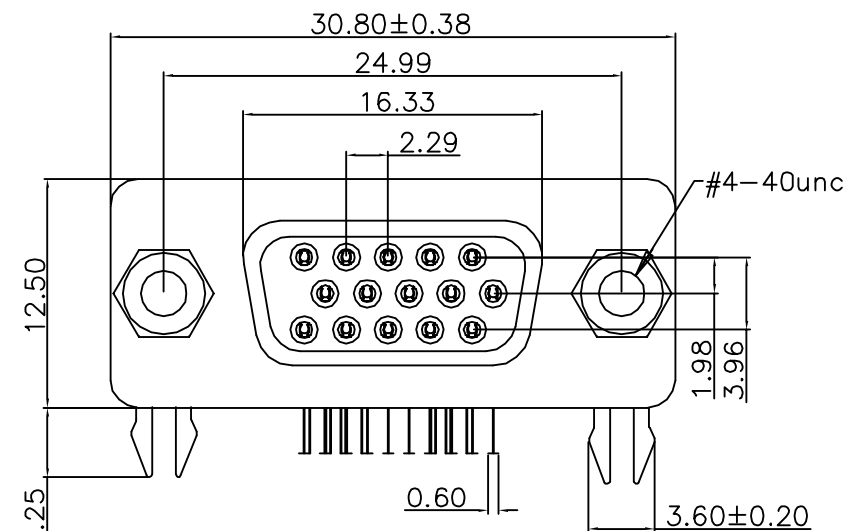

Recommended P.B.C Layout
Top View

NOTE:

1. MATERIAL:

- 1.1 HOUSING: PBT+30%GF, COLOR: BLUE.
- 1.2 TERMINAL: COPPER ALLOY.
- 1.3 SHELL: SPCC
- 1.4 SCREW: SPCC
- 1.5 GROUNDING: SPCC

2. PLATING:

2.1 CONTACT:

- 80u" Min. TIN PLATED ON SOLDER TAIL
- 50u" Min. NICKEL UNDER-PLATED

2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL

2.3 GROUNDING: 50u" Min, TIN PLATED OVERALL.

2.4 SCREW: 50u" Min, NICKEL PLATED OVERALL.

3. SPECIFICATIONS:

VOLTAGE: 500 VAC(RMS) MAX.

CURRENT RATING: 3 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)

MATING FORCE: 5.1Kg.Max.

UNMATING FORCE: 1.0Kg MIN.

OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



深圳市万骏达电子有限公司

<http://www.wanjunda.com>

品名 (ITEM NO) HDR3.08 F 简易 蓝胶 直锁 全锡
针长2.54 螺丝5.8

料号 (PART NO) DSUB-HDR-15F-3.08

模号 (MODEL NO)

图号 (DWG NO)

单位 (UNIT): MM

版本 (REV)

比例 (SCALE) 1:1

日期 (DATE)

设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

核准 (APPROVED)

未注公差
TOLERANCE UNSPECIFIED
X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
X" $\pm 5^{\circ}$
X.X" $\pm 2^{\circ}$