




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

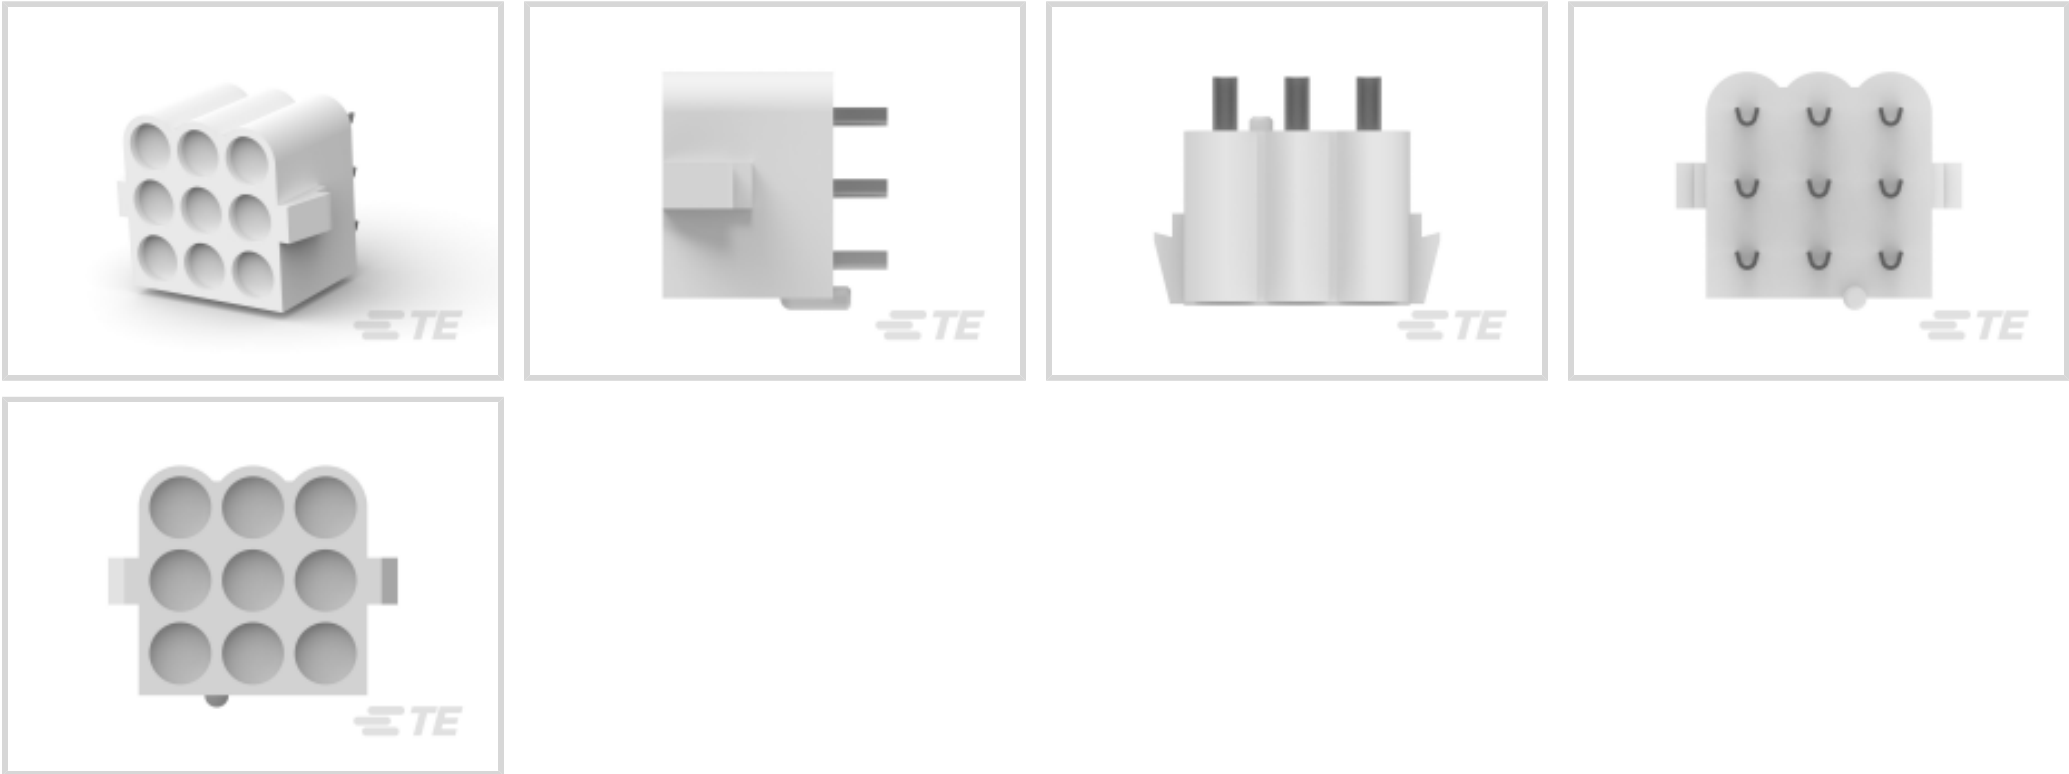

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **9**

Centerline (Pitch): **6.1 mm [.24 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	9
PCB Mount Orientation	Vertical
Number of Power Positions	9
Number of Rows	3

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Multiple Contact Types	Without
------------------------	---------



PCB Contact Termination Area Plating Material Thickness	2.54 μm[100 μin]
Contact Layout	Matrix
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	17 A
Contact Retention Within Housing	Without
Contact Type	Socket
PCB Contact Termination Area Plating Material	Pre-Tin

Termination Features

Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	6.1 mm[.24 in]
Housing Color	Natural
Housing Material	PA 66

Dimensions

	.03 – .09 in
Connector Height	18.6 mm[.732 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Product Width	19.2 mm[.755 in]
Product Length	19.2 mm[.755 in]
Row-to-Row Spacing	6.1 mm[.24 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Identification Marking

Circuit Identification Feature	Without
--------------------------------	---------

Industry Standards

--	--



CSA Rating	Certified
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-480586-0
09P .140 MNL CAP NAT



TE Part # 1-480585-0
09P .140 MNL PLUG NAT



TE Part # 1-480673-0
09P .140 MNL CAP PM NAT



TE Part # 794683-1
09P .140 MNL CAP BLK HT



TE Part # 926102-1
2 POS M-N-L FEMALE HOUSING



TE Part # 1586305-1
09P .140 MNL PLUG BLK HT



TE Part # 926446-2
8P 3,5MM MNL BUGEH

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Caps & Covers(34)




Connector Contacts(209)




Connector Hardware(12)



Connector Seals & Cavity Plugs(27)

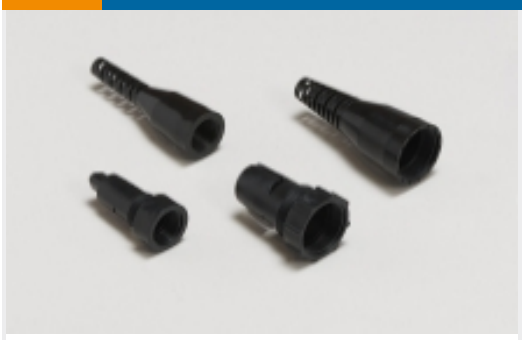

Connector Strain Relief(7)

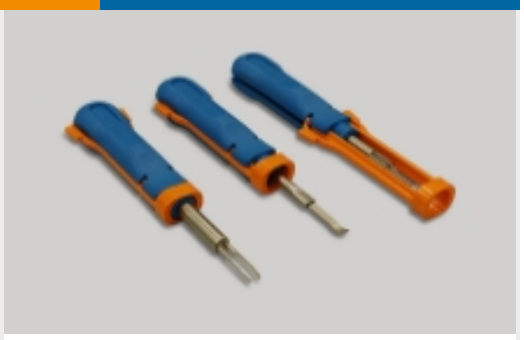

Insertion & Extraction Tools(4)



Rectangular Connector Housings(1)



Rectangular Power Connectors(670)



Standard Circular Connectors(1)

Customers Also Bought



TE Part #1-1703820-1
6POS,TAB 1.6X0.6,TAB HSG,ASSY,

TE Part #1-967325-2
2,5MM BU-GEH 3P

TE Part #965783-1
Circular DIN Backshells

TE Part #3-1622820-8
3520 330R 5%

TE Part #9-1879501-1
CRGH2512 5% 5K6 2W

TE Part #2176330-9
CRGP 2010 47R 1%

TE Part #1-1418883-1
62.POS.MIXED REC.HSG

TE Part #1-962915-3
TAB 2.8x0.8 CONTACT CS SWS Au

TE Part #1394353-2
FLACHSTE A-P 1,5

Documents

Product Drawings

09P.M-N-L.PIN HDR.

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_365046-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_365046-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_365046-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Product Specification

English