
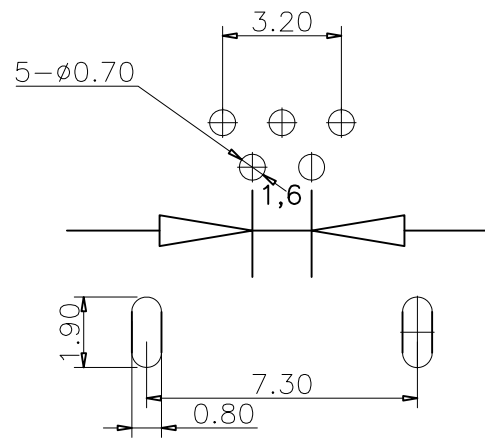
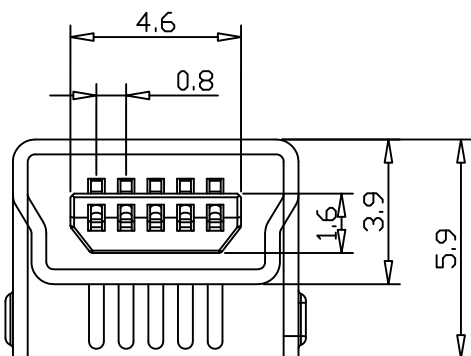
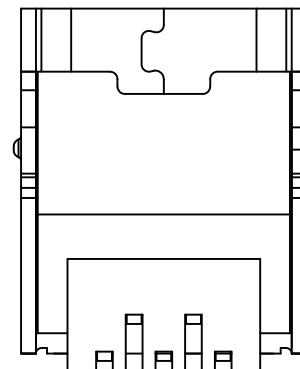
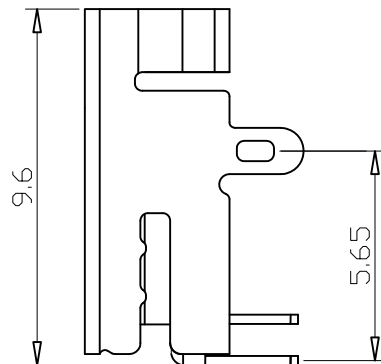


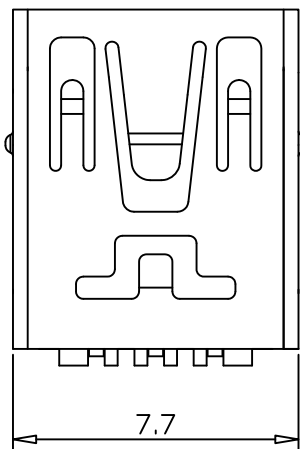

Recommended PCB Layout

特性: Specifications:
电器: Electrical:
接触阻抗: Contact Resistance
30 milliohms Max
耐电压: Dielectric Withstanding Voltage:
500V AC Sea Level
绝缘阻抗: Insulation Resistance:
100 MEGA ohms MIN
材料: Material:
塑胶Housing:Hing Temperature
Thermoplastics.
LCP 耐高温塑胶
端子: Contact: Copper Alloy铜合金
铜壳Shell:Copper Alloy 铜合金
电镀Finish:
端子Contact:Plated Gold In Mating
Area:
Tin On Slder Talls
接触点镀金。脚镀锡
铜壳: Shell:
Nickel/Plating 镀镍

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	920-462A2021D10100
X.	±0.30	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	品名 PRODUCT NO.	MINI 5P 90度B型两脚插板铜壳LCP黑胶1U
.X	±0.25	.X	±2.°	日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	AO
.XXX	±0.10	.XXX	±0.5°						