



twist lever for position switch 3SE52 Stainless steel lever 21 mm long Form A with stainless steel roller 19 mm according to EN 50047



|                                                          |                                                                                          |
|----------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>product brand name</b>                                | SIRIUS                                                                                   |
| <b>product designation</b>                               | actuator for part-turn actuator                                                          |
| <b>product type designation</b>                          | 3SE5                                                                                     |
| <b>manufacturer's article number</b>                     |                                                                                          |
| • of the supplied operating lever                        | 3SE5000-0AA32                                                                            |
| <b>General technical data</b>                            |                                                                                          |
| product function positive opening                        | Yes                                                                                      |
| <b>shock resistance</b>                                  |                                                                                          |
| • acc. to IEC 60068-2-27                                 | 30g / 11 ms                                                                              |
| <b>vibration resistance</b>                              |                                                                                          |
| • acc. to IEC 60068-2-6                                  | 0.35 mm/5g                                                                               |
| mechanical service life (switching cycles) typical       | 15 000 000                                                                               |
| <b>reference code acc. to IEC 81346-2</b>                | T                                                                                        |
| <b>active principle</b>                                  | mechanical                                                                               |
| design of the interface for safety-related communication | without                                                                                  |
| <b>Enclosure</b>                                         |                                                                                          |
| coating of the enclosure                                 | Other types                                                                              |
| <b>Drive Head</b>                                        |                                                                                          |
| design of the actuating element                          | Twist lever, high-grade steel lever, 21 mm long, straight, high-grade steel roller 19 mm |
| standard-compliant actuator head                         | EN 50047, design A                                                                       |
| shape of the switch head                                 | roller                                                                                   |
| outer diameter of the switch head                        | 19 mm                                                                                    |
| <b>Communication/ Protocol</b>                           |                                                                                          |
| design of the interface                                  | without                                                                                  |
| <b>Ambient conditions</b>                                |                                                                                          |
| explosion protection category for dust                   | none                                                                                     |
| <b>Installation/ mounting/ dimensions</b>                |                                                                                          |
| mounting position                                        | any                                                                                      |
| fastening method                                         | screw fixing                                                                             |
| <b>Certificates/ approvals</b>                           |                                                                                          |
| General Product Approval                                 |                                                                                          |



KC

KC

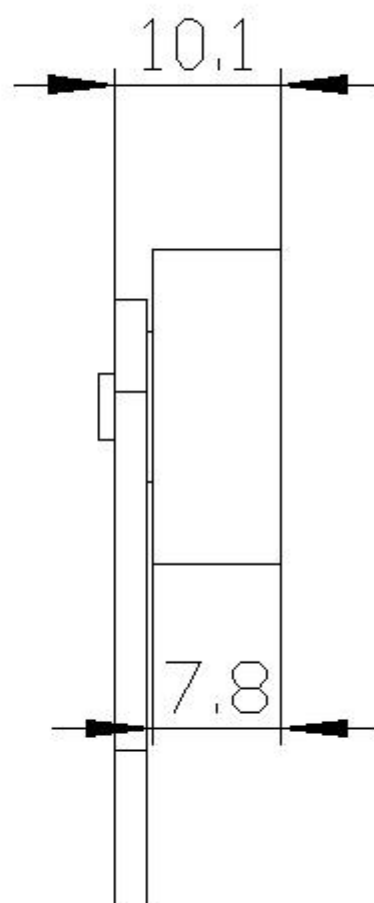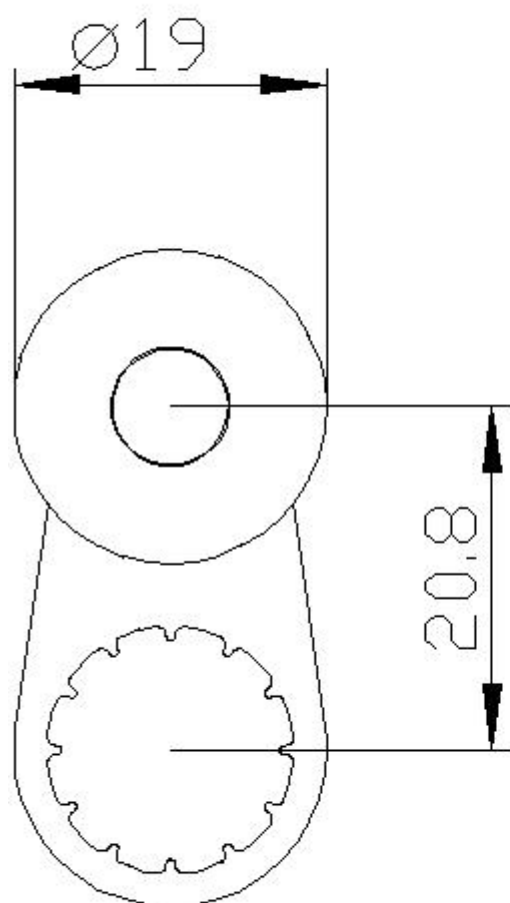

[Miscellaneous](#)[Type Test  
Certificates/Test  
Report](#)[Confirmation](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0AA32>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0AA32>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0AA32>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE5000-0AA32&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0AA32&lang=en)

last modified:

12/21/2020 