


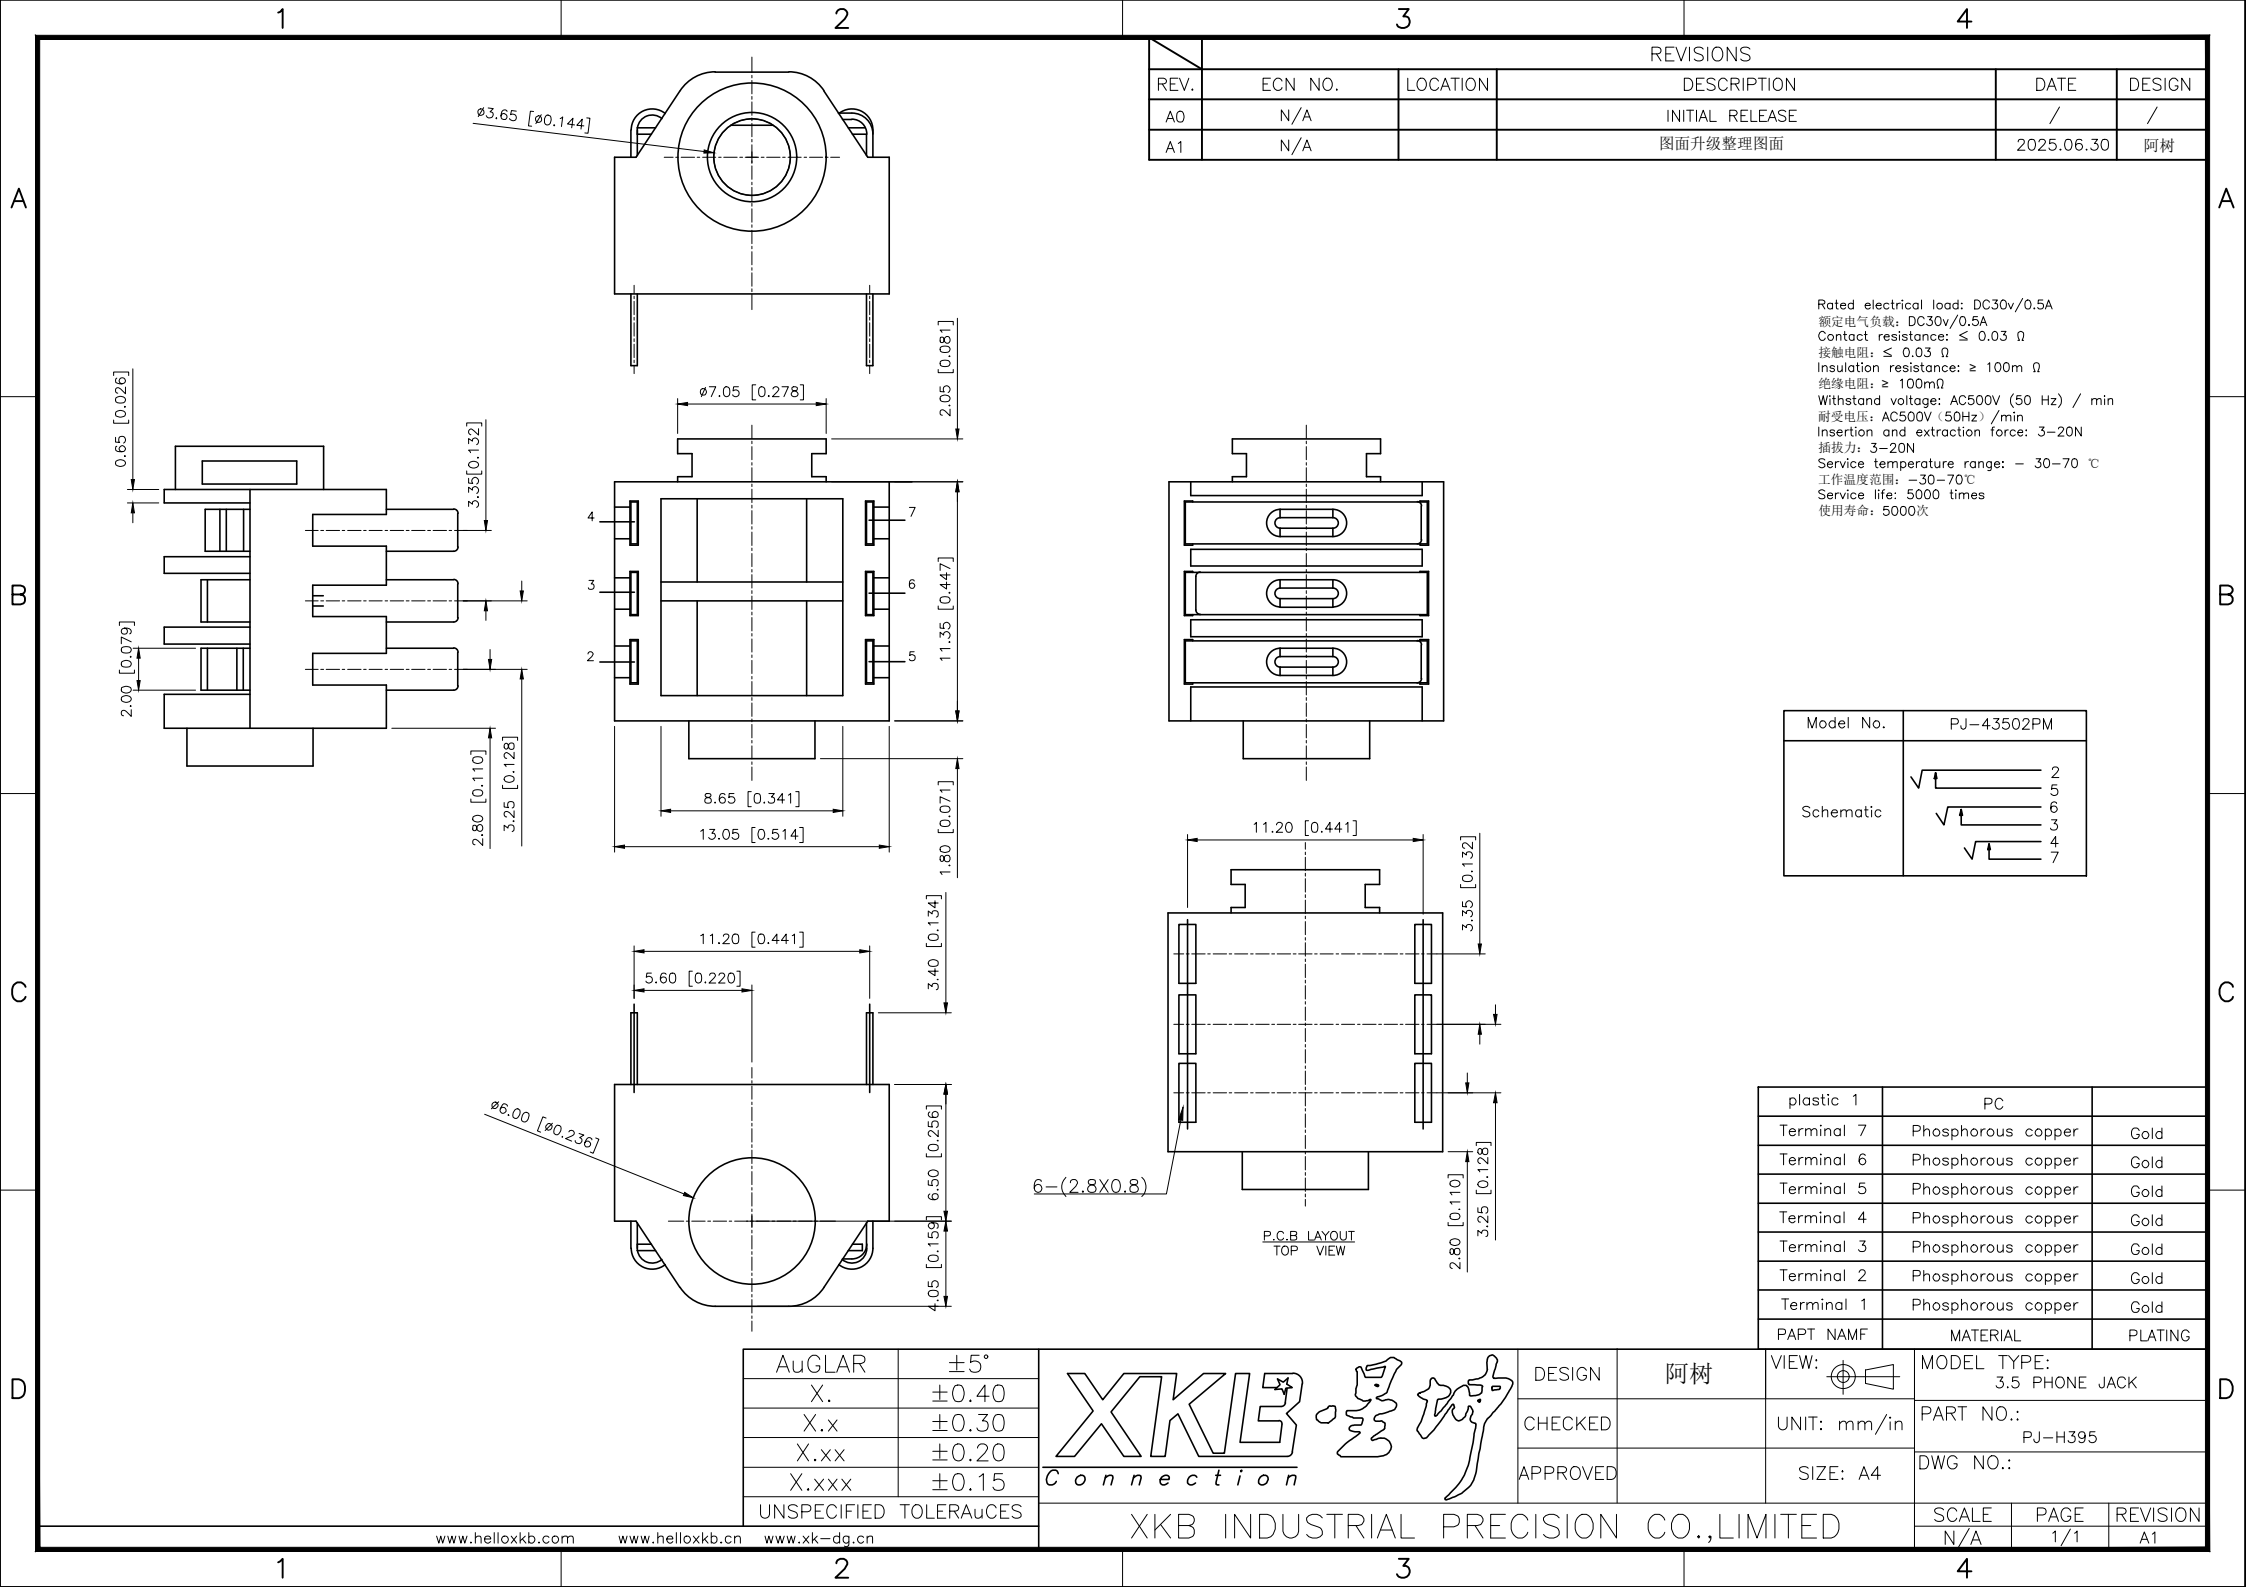

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.30	阿树

Rated electrical load: DC30v/0.5A
额定电气负载: DC30v/0.5A
Contact resistance: ≤ 0.03 Ω
接触电阻: ≤ 0.03 Ω
Insulation resistance: ≥ 100m Ω
绝缘电阻: ≥ 100mΩ
Withstand voltage: AC500V (50 Hz) / min
耐受电压: AC500V (50Hz) / min
Insertion and extraction force: 3-20N
插拔力: 3-20N
Service temperature range: - 30-70 ℃
工作温度范围: -30-70℃
Service life: 5000 times
使用寿命: 5000次

Model No.	PJ-43502PM
Schematic	

plastic	1	PC
Terminal 7	Phosphorous copper	Gold
Terminal 6	Phosphorous copper	Gold
Terminal 5	Phosphorous copper	Gold
Terminal 4	Phosphorous copper	Gold
Terminal 3	Phosphorous copper	Gold
Terminal 2	Phosphorous copper	Gold
Terminal 1	Phosphorous copper	Gold
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-H395
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1