


## Surface Mount Multilayer Ceramic Chip Capacitors for Safety Certified Applications

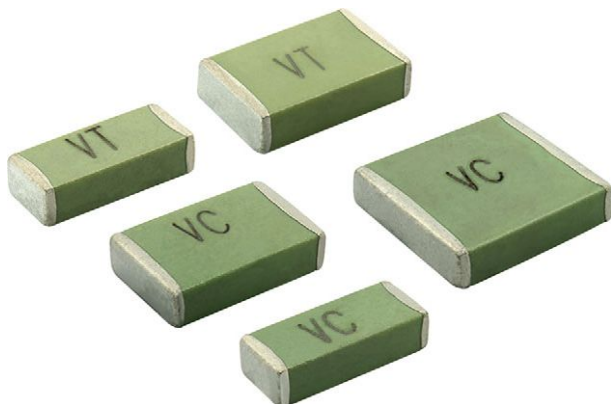

### FEATURES

- Approved IEC 60384-14
- Specialty: safety certified capacitors
- AEC-Q200 qualified available with PPAP for size 2008 and 2220
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Material categorization:  
for definitions of compliance please see  
[www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

AUTOMOTIVE  
GRADE  
Available



**RoHS**  
COMPLIANT  
**HALOGEN**  
**FREE**  
**GREEN**  
(5-2008)

### APPLICATIONS

- Power supplies
- EMI and AC line filtering
- EV charging systems
- AC equipment and appliances
- Lighting strike and voltage surge protection
- Isolators
- Facsimile and telephone

### ELECTRICAL SPECIFICATIONS

#### Note

- Electrical characteristics at +25 °C unless otherwise specified

**Operating Temperature:** -55 °C to +125 °C

**Capacitance Range X1 / Y2 <sup>(1)</sup>:** 10 pF to 1.0 nF

**Capacitance Range X2 <sup>(1)</sup>:** 10 pF to 470 pF

**Voltage Range:** 250 V<sub>AC</sub>

**Temperature Coefficient of Capacitance (TCC):**

0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C

**Dissipation Factor (DF) <sup>(1)</sup>:** 0.1 % maximum

#### Note

<sup>(1)</sup> Test conditions per IEC 60384-14:

Voltage: 1.0 V<sub>RMS</sub> at 1 MHz

#### Insulating Resistance:

at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less  
at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less

**Aging Rate:** 0 % maximum per decade

#### Voltage Proof Test:

X1 / Y2: min. 1500 V<sub>AC</sub>

X2: min. 1075 V<sub>DC</sub>

#### Peak Impulse Voltage:

X1 / Y2: 5000 V

X2: 2500 V

#### Climatic Category According to EN 60068-1:

55/125/21



## QUICK REFERENCE DATA

| DIELECTRIC          | CASE | MAXIMUM VOLTAGE<br>(V <sub>AC</sub> ) | CAPACITANCE |         |
|---------------------|------|---------------------------------------|-------------|---------|
|                     |      |                                       | MINIMUM     | MAXIMUM |
| C0G (NP0) (X1 / Y2) | 2008 | 250                                   | 10 pF       | 220 pF  |
|                     | 2012 | 250                                   | 18 pF       | 470 pF  |
|                     | 2220 | 250                                   | 47 pF       | 1.0 nF  |
| C0G (NP0) (X2)      | 2008 | 250                                   | 10 pF       | 390 pF  |
|                     | 2012 | 250                                   | 18 pF       | 470 pF  |

## Notes

- Detail ratings see “Selection Chart”
- Size 2008 and 2012 are compatible with 1808 and 1812 solderlands and full conform with the IEC-60384-14 requirements for creepage distance

## ORDERING INFORMATION

| VJ2008               | A                | 101                                                                                                                                   | K                       | X                                  | U                       | S                                            | T                             | ### (1)(2)                                                                                                    |
|----------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------|-------------------------|----------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------|
| CASE CODE            | DIELECTRIC       | CAPACITANCE NOMINAL CODE                                                                                                              | CAPACITANCE TOLERANCE   | TERMINATION                        | AC VOLTAGE RATING       | MARKING                                      | PACKAGING                     | PROCESS CODE                                                                                                  |
| 2008<br>2012<br>2220 | A =<br>C0G (NP0) | Expressed in picofarads (pF).<br>The first two digits are significant, the third is a multiplier.<br><b>Examples:</b><br>101 = 100 pF | J = ± 5 %<br>K = ± 10 % | X = Ni barrier<br>100 % tin plated | U = 250 V <sub>AC</sub> | S = marked<br>(see Part Marking table below) | T = 7" reel /<br>plastic tape | X1 = X1 / Y2<br>X2 = X2<br>Vishay automotive grade per customer request add “A”:<br>X1A = X1 / Y2<br>X2A = X2 |


## Notes

- (1) Process code must be added to control products and requirements
  - (2) Vishay automotive grade “X1A” and “X2A” only for size 2008 and 2220
- Detail ratings see “Selection Chart”

## PART MARKING

| MARKING | 1 <sup>ST</sup> DIGIT<br>MANUFACTURER | 2 <sup>ND</sup> DIGIT<br>DIELECTRIC AND RATING |
|---------|---------------------------------------|------------------------------------------------|
| VC      | V = Vishay                            | C = C0G / NP0, X1 / Y2                         |
| VT      |                                       | T = C0G / NP0, X2                              |

## DIMENSIONS in inches (millimeters)

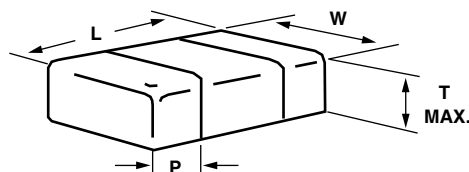

| CASE CODE | PART ORDERING NUMBER | LENGTH (L)                     | WIDTH (W)                      | MAXIMUM THICKNESS (T) | TERMINATION (P) |                 |
|-----------|----------------------|--------------------------------|--------------------------------|-----------------------|-----------------|-----------------|
|           |                      |                                |                                |                       | MINIMUM         | MAXIMUM         |
| 2008      | VJ2008               | 0.200 ± 0.010<br>(5.08 ± 0.25) | 0.080 ± 0.010<br>(2.03 ± 0.25) | 0.086<br>(2.18)       | 0.010<br>(0.25) | 0.030<br>(0.76) |
| 2012      | VJ2012               | 0.200 ± 0.010<br>(5.08 ± 0.25) | 0.126 ± 0.008<br>(3.20 ± 0.20) | 0.086<br>(2.18)       | 0.010<br>(0.25) | 0.030<br>(0.76) |
| 2220      | VJ2220               | 0.220 ± 0.008<br>(5.59 ± 0.20) | 0.200 ± 0.010<br>(5.08 ± 0.25) | 0.086<br>(2.18)       | 0.010<br>(0.25) | 0.030<br>(0.76) |



| SELECTION CHART            |        |                       |                       |                       |                       |                       |
|----------------------------|--------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| DIELECTRIC                 |        | C0G (NP0) (X1 / Y2)   |                       |                       | C0G (NP0) (X2)        |                       |
| STYLE                      |        | VJ2008 <sup>(1)</sup> | VJ2012 <sup>(1)</sup> | VJ2220 <sup>(1)</sup> | VJ2008 <sup>(1)</sup> | VJ2012 <sup>(1)</sup> |
| CASE CODE                  |        | 2008                  | 2012                  | 2220                  | 2008                  | 2012                  |
| VOLTAGE (V <sub>AC</sub> ) |        | 250                   | 250                   | 250                   | 250                   | 250                   |
| VOLTAGE CODE               |        | U                     | U                     | U                     | U                     | U                     |
| CAP. CODE                  | CAP.   |                       |                       |                       |                       |                       |
| 100                        | 10 pF  | •                     |                       |                       | •                     |                       |
| 120                        | 12 pF  | •                     |                       |                       | •                     |                       |
| 150                        | 15 pF  | •                     |                       |                       | •                     |                       |
| 180                        | 18 pF  | •                     | •                     |                       | •                     | •                     |
| 220                        | 22 pF  | •                     | •                     |                       | •                     | •                     |
| 270                        | 27 pF  | •                     | •                     |                       | •                     | •                     |
| 330                        | 33 pF  | •                     | •                     |                       | •                     | •                     |
| 390                        | 39 pF  | •                     | •                     |                       | •                     | •                     |
| 470                        | 47 pF  | •                     | •                     | •                     | •                     | •                     |
| 560                        | 56 pF  | •                     | •                     | •                     | •                     | •                     |
| 680                        | 68 pF  | •                     | •                     | •                     | •                     | •                     |
| 820                        | 82 pF  | •                     | •                     | •                     | •                     | •                     |
| 101                        | 100 pF | •                     | •                     | •                     | •                     | •                     |
| 121                        | 120 pF | •                     | •                     | •                     | •                     | •                     |
| 151                        | 150 pF | •                     | •                     | •                     | •                     | •                     |
| 181                        | 180 pF | •                     | •                     | •                     | •                     | •                     |
| 221                        | 220 pF | •                     | •                     | •                     | •                     | •                     |
| 271                        | 270 pF |                       | •                     | •                     | •                     | •                     |
| 331                        | 330 pF |                       | •                     | •                     | •                     | •                     |
| 391                        | 390 pF |                       | •                     | •                     | •                     | •                     |
| 471                        | 470 pF |                       | •                     | •                     |                       | •                     |
| 561                        | 560 pF |                       |                       | •                     |                       |                       |
| 681                        | 680 pF |                       |                       | •                     |                       |                       |
| 821                        | 820 pF |                       |                       | •                     |                       |                       |
| 102                        | 1.0 nF |                       |                       | •                     |                       |                       |
| 122                        | 1.2 nF |                       |                       |                       |                       |                       |
| 152                        | 1.5 nF |                       |                       |                       |                       |                       |
| 182                        | 1.8 nF |                       |                       |                       |                       |                       |

**Notes**

<sup>(1)</sup> See soldering recommendations within this data book, or visit [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)

• RoHS-compliant

| PACKAGING QUANTITIES <sup>(1)</sup> |           |                       |
|-------------------------------------|-----------|-----------------------|
| CASE CODE                           | TAPE SIZE | 7" REEL QUANTITIES    |
|                                     |           | PACKAGING CODE<br>"T" |
| 2008                                | 12 mm     | 2000                  |
| 2012                                | 12 mm     | 1000                  |
| 2220                                | 12 mm     | 1000                  |

**Note**

<sup>(1)</sup> Reference: EIA standard RS481 - "Taping of Surface Mount Components for Automatic Placement"

**APPROVALS**

VDE approval mark (update 2016-06-23):

|                    |          |                  |                     |
|--------------------|----------|------------------|---------------------|
| X1 / Y2-capacitor: | 40036706 | 10 pF to 1000 pF | 250 V <sub>AC</sub> |
| X2-capacitor:      | 40036706 | 10 pF to 470 pF  | 250 V <sub>AC</sub> |

DIN EN 60384-14 (VDE 0565-1-1):2014-04; EN 60384-14:2013-08; IEC 60384-14 (ed.4)



CAN / cCSAus approval mark:

|                    |          |                  |        |
|--------------------|----------|------------------|--------|
| X1 / Y2-capacitor: | 70001064 | 10 pF to 1000 pF | 250 V~ |
| X2-capacitor:      | 70001064 | 10 pF to 470 pF  | 250 V~ |

CAN / CSA-E60384-14:09 and ANSI / UL 60384-14-2009

**STORAGE AND HANDLING CONDITIONS**

(1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.

(2) The product is recommended to be used within a time-frame of 2 years after shipment.

Check solderability in case extended shelf life beyond the expiry date is needed.

Precautions:

- Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.
- Store products on the shelf and avoid exposure to moisture or dust.
- Do not expose products to excessive shock, vibration, direct sunlight and so on.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.