
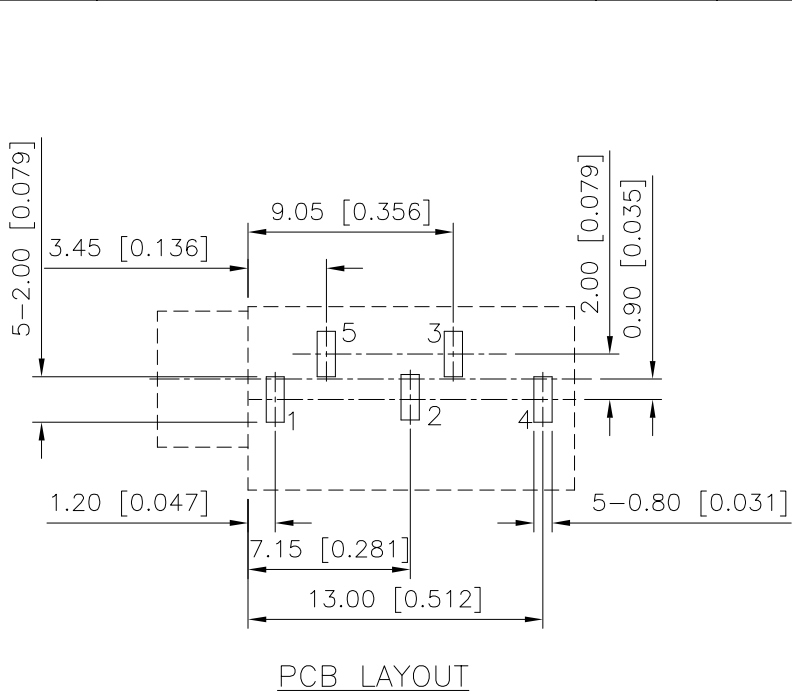
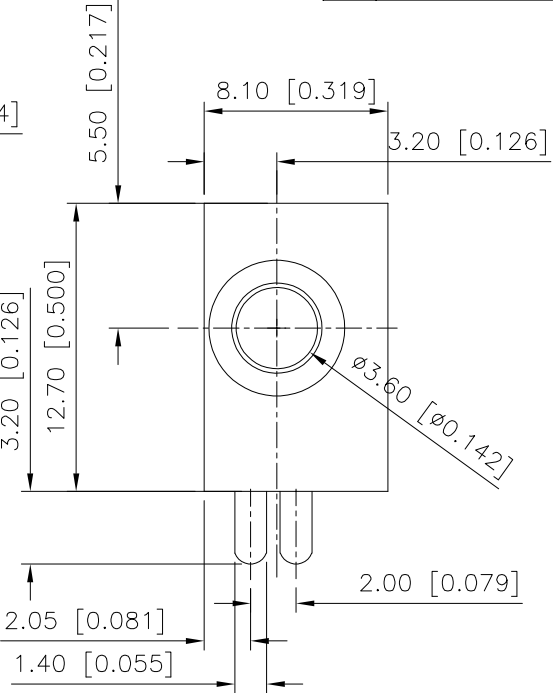


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		按实物修改尺寸	2024.03.15	

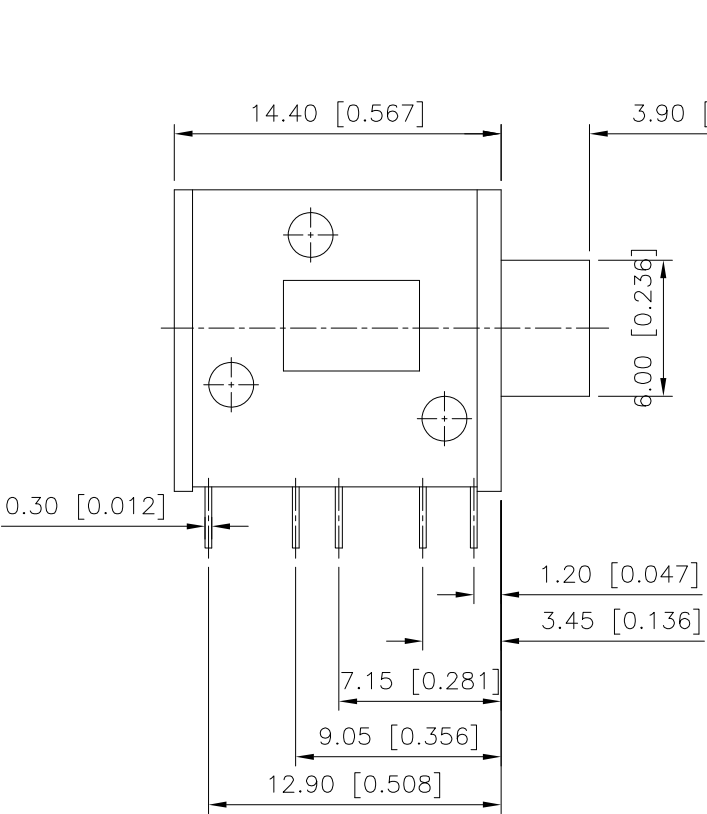

- Specifications (规格):
1. Voltage rating (额定电压): 30V AC DC
 2. Current rating (额定电流): 0.5A AC/DC
 3. Withstanding voltage (耐压值): $\geq 500V$ AC/minute
 4. Insulation resistance (绝缘电阻): $100M\Omega$ Min
 5. Contact resistance (绝缘电阻): $20m\Omega$ Max
 6. Mating cycles (寿命): 5000 cycles Min
 7. Insertion and extraction force (插拔力): $0.3 \sim 3.0kgf$
 6. Temperature range (使用温度): $-25^{\circ}C \sim +70^{\circ}C$

PJ-325	PJ-325-1	PJ-325-2	PJ-325-3
SCHEMATIC			

	MATERIAL	PLATING
TERMINAL 1	PHOSPHOR BRONZE	TIN
TERMINAL 2	BRASS	TIN
TERMINAL 3	PHOSPHOR BRONZE	TIN
TERMINAL 4	BRASS	TIN
TERMINAL 5	BRASS	TIN
PLASTIC	PBT	

ANGULAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	桑 葚	VIEW:	MODEL TYPE: 3.5mm PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-325-X
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0