

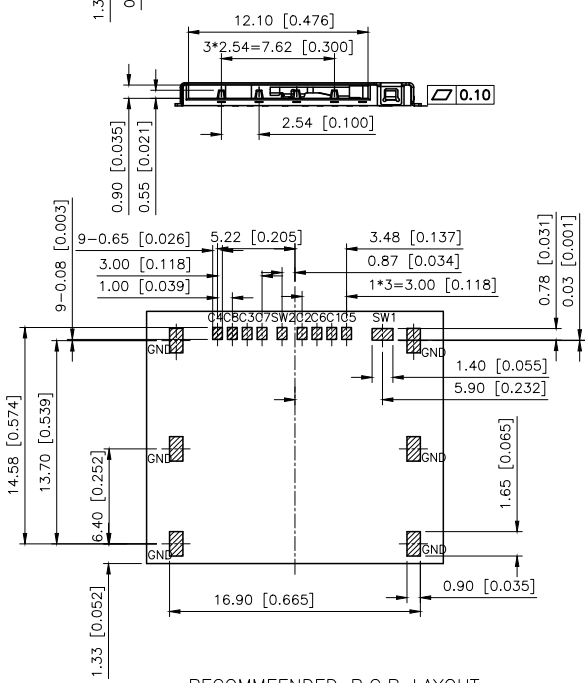
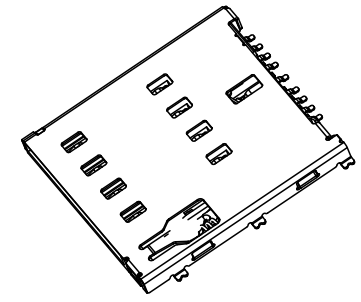




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.16	阿树

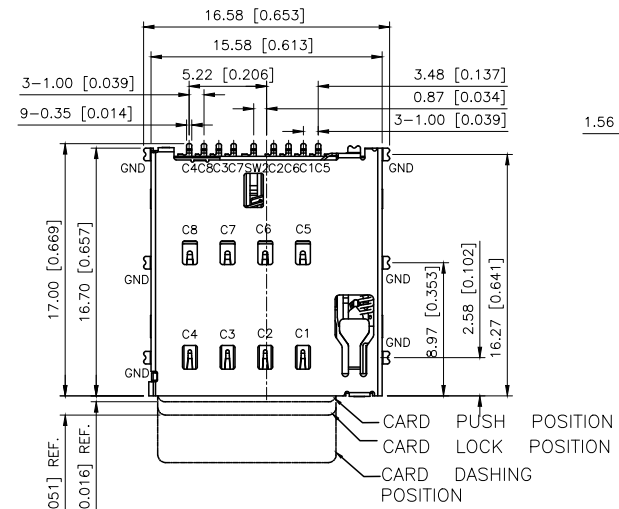

3FF SIM CARD



DETECT SWITCH

CARD INSERTING POSITION	CLOSE	SW1 SW2
	OPEN	SW1 SW2
NO CARD	OPEN	SW1 SW2

Card is not inserted;
Sw2 and Sw1/GND pin is open
Card is inserted;
Sw2 and Sw1/GND pin is close

RECOMMENDED P.C.B LAYOUT
TOP VIEW(TOLERANCE±0.05)



- NOTES:
- MATERIAL:
 - Housing:High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal:Copper Alloy.
 - Shell:Stainless Steel.
 - SPECIALITY:
 - Rated current:1.0A
 - Rated voltage:50V
 - Contact Resistance:100mΩ MAX
 - Insulation Resistance:1000MΩ MIN 500V DC
 - Dielectric withstanding voltage: 500V AC.
 - Solder ability:255±5℃, 5±0.5s.
 - Durability:5000 Cycles Min.
 - Operating condition:Temperature-40℃~+85℃; Humidity 80% R.H MAX
 - Please contact jits sales representative to verify product details & availability

ITEM	PART NAME	Q'TY	MATERIAL	FINISHING
1	HOUSING	1	LCP	Black UL94V-0
2	TERMINAL	9	COPPER ALLOY	Contact area:Gold plated
3	SHELL	1	SUS	SMT area:Gold plated
4	LINK	1	SUS304	
5	SPRING	1	SWP	
6	SLIDER	1	LCP	Black UL94V-0

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: SIM CARD CONN
CHECKED		UNIT: mm/in	PART NO.: XKSM0-072-P9
APPROVED		SIZE: A4	DWG NO.: