




2345-C Series

FFC/FPC Connector 0.5mm(0.02") ZIF Type

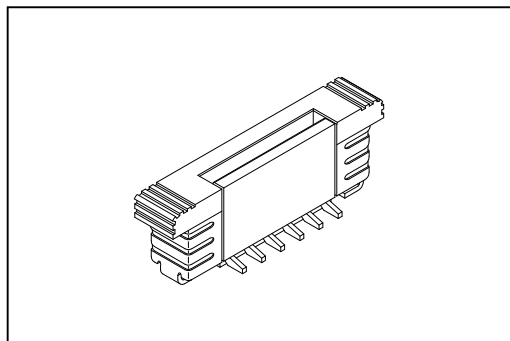

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Solder : Copper Alloy.

Electrical Characteristics:

Current Rating: 0.4 A.

Dielectric Withstanding Voltage: AC 200V.

Insulator Resistance: 500M Ω min.

Contact Resistance: 20m Ω max.


Operating Temperature: -25°C~+85°C.

Features:

* ZIF, Surface Mount. Vertical.

* Size 4 through 60 available.

* For 0.30mm(0.0118 ") thick FFC/FPC.

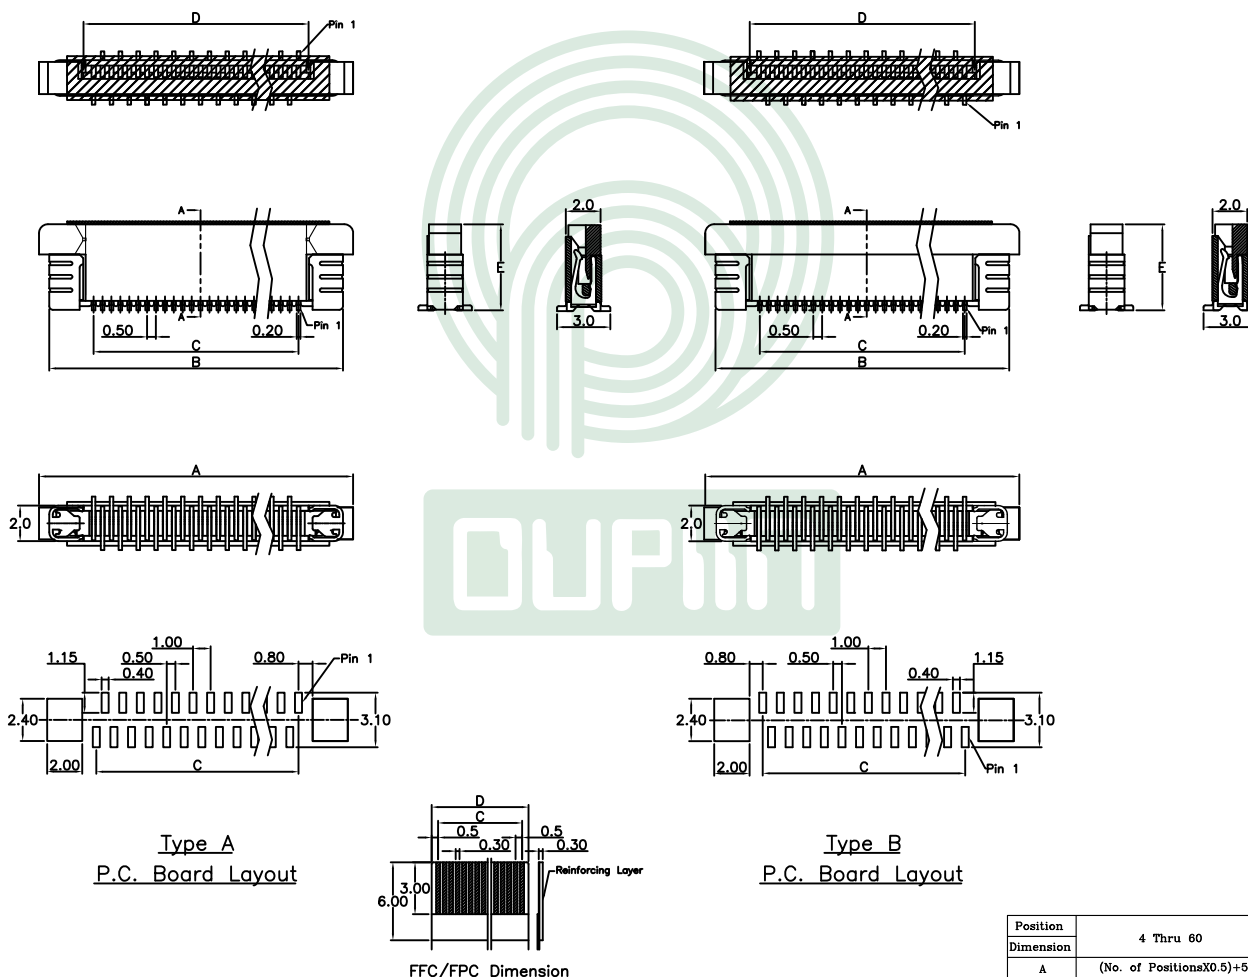

Position Dimension	4 Thru 60
A	(No. of PositionsX0.5)+5.6
B	(No. of PositionsX0.5)+4.5
C	(No. of PositionsX0.5)-0.5
D	(No. of PositionsX0.5)+0.6

Ordering information

2345-C

Series

60

No. of
Pin Count

T

T: Tin
Plated

D

D: SMD
Type

3

3: Vertical
Type

A

A: Type A
B: Type B

T

T: Tape & Reel
Package
U: Tube Package

-S

S: Mylar
Blank: W/O Mylar