


RoHS

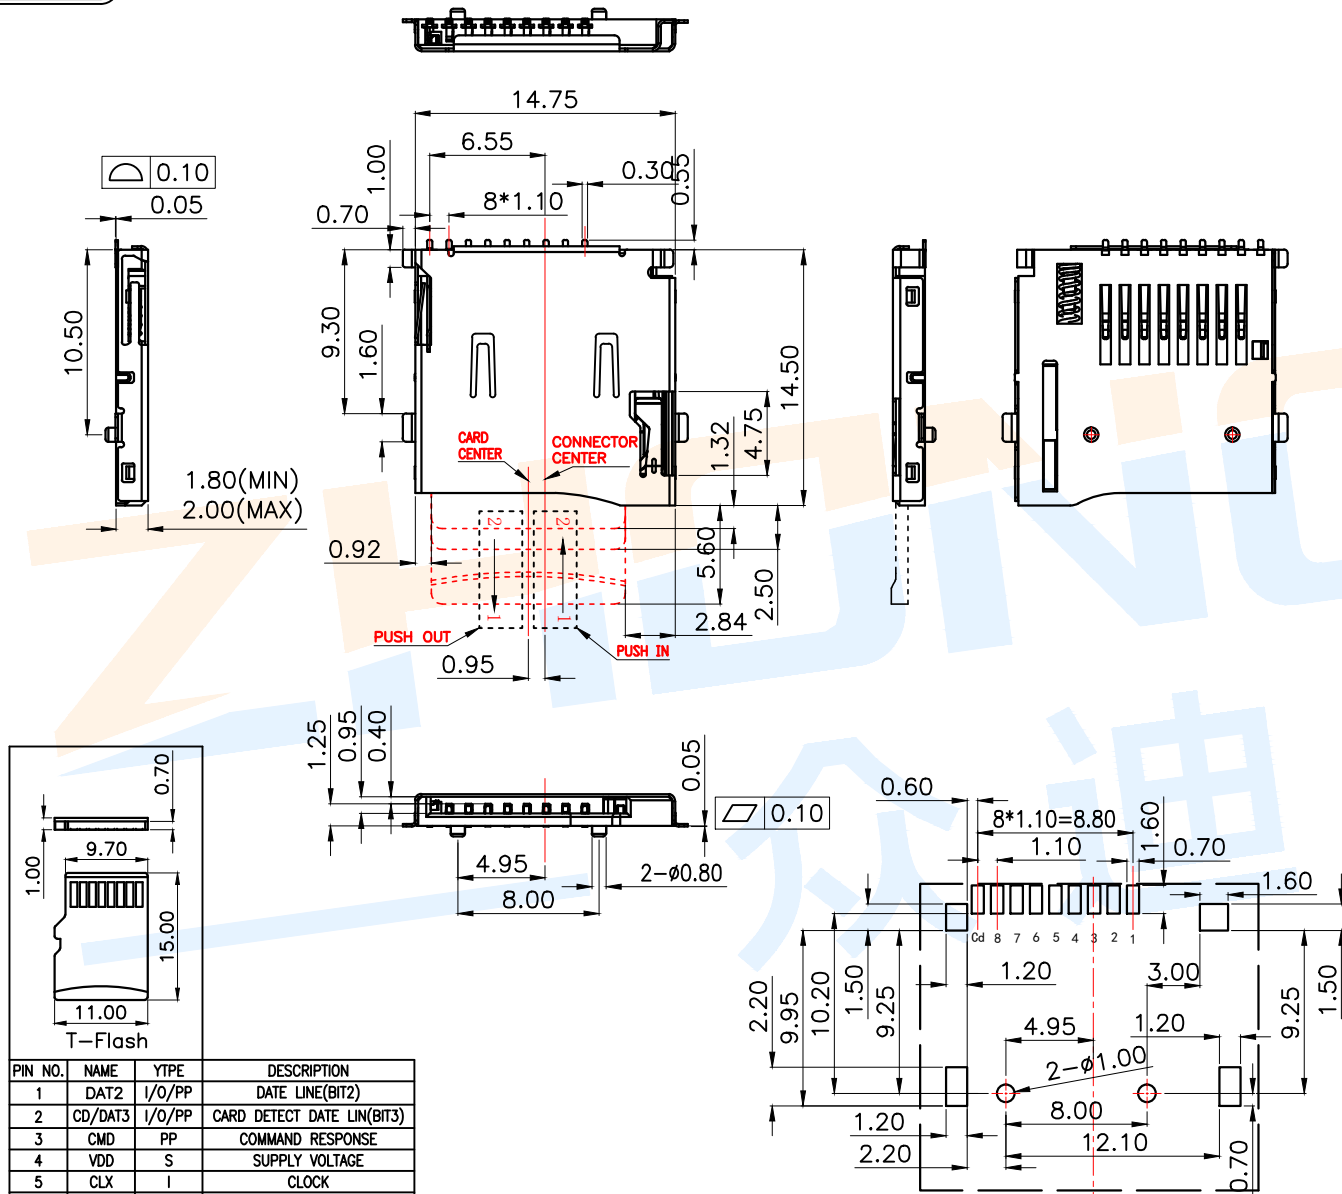

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)
9	CD	CD	CD

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

- Specifications/技术规格:
- 1.Current rating/ 额定电流: 0.5A
 - 2.Voltage rating/ 额定电压: 100V DC
 - 3.Insulation Resistance/ 绝缘电阻: 100MΩ Min
 - 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
 - 5.Contact Resistance/ 接触电阻: 40mΩ Max
 - 6.Durability/ 耐久性: 5,000 Insertions
 - 7.Operating Temperature/ 工作温度: -40℃ to +85℃

①	Spring		1	SUS	Nature
②	Terminal		9	Phosphor bronze	Sn Plated
③	Cover		1	SUS	Ni Plated
④	Base		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI 众迪 Zhongdi Electronic Technology Co., Ltd

design	date	name	TF CARD CONNECTOR
Review	date	model	TF-002A-P
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4