

2200539

https://www.phoenixcontact.com/us/products/2200539

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, Lower housing part with metal foot catch, with 3 FE contacts, tall design, with vents, width: 67.8 mm, height: 99 mm, depth: 107.3 mm, color: light grey (similar RAL 7035), cross connection: integrated bus connector, number of positions cross connector: 10, Bus connector: 10 parallel contacts

Your advantages

- · Tool-free mounting
- Available in overall widths from 12.5 mm ... 90 mm, modular extension is possible
- · Flammability rating V0 in accordance with UL 94
- · Variety of connection technology
- · Can be mounted on the DIN rail
- With integrated or DIN-rail-mountable bus connector as an option

Commercial data

Item number	2200539
Packing unit	10 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ACHAAB
Catalog page	Page 665 (C-1-2013)
GTIN	4046356608053
Weight per piece (including packing)	110.61 g
Weight per piece (excluding packing)	110.61 g
Country of origin	DE



2200539

https://www.phoenixcontact.com/us/products/2200539

Technical data

Notes

Assembly note	Refer to the data sheet for the range in the download area.
Recommendation	Material of contact pads for bus connector, galvanic gold (hard gold)

Product properties

Product type	Enclosure bottom part
Housing type	DIN rail housing
Housing series	ME
Product family	ME 67,5
Max. number of positions	0)
Туре	Lower housing part with metal foot catch, with 3 FE contacts, tall design
Ventilation openings present	yes

Dimensions

Dimensional drawing	d
Width	67.8 mm
Height	99 mm
Depth	107.3 mm
Depth from top edge of DIN rail	100.7 mm
Depth from top edge of DIN rail to support point on upper part	68.5 mm
PCB design	
PCB thickness	1.4 mm 1.8 mm

Material specifications

Color (Housing)	light grey (RAL 7035)
Flammability rating according to UL 94	V0
CTI according to IEC 60112	600
Housing material	Polyamide
Surface characteristics	untreated

Environmental and real-life conditions

Power dissipation single housing for 20 °C



2200539

https://www.phoenixcontact.com/us/products/2200539

Ambient temperature	20 °C
Reduction factor	1
Mounting position	vertical
Power dissipation	9.1 W
De continuitation distribution distribution (c. 00 °C)	
Power dissipation single housing for 30 °C	20.00
Ambient temperature	30 °C
Reduction factor	0.91
Mounting position	vertical
Power dissipation	8.3 W
Power dissipation single housing for 40 °C	
Ambient temperature	40 °C
Reduction factor	0.81
Mounting position	vertical
Power dissipation	7.4 W
Power dissipation single housing for 50 °C	
Ambient temperature	50 °C
Reduction factor	0.7
Mounting position	vertical
Power dissipation	6.4 W
i ower dissipation	0. 4 vv
Power dissipation single housing for 60 °C	
Ambient temperature	60 °C
Reduction factor	0.57
Mounting position	vertical
Power dissipation	5.2 W
Power dissipation single housing for 70 °C	
Ambient temperature	70 °C
Reduction factor	0.49
Mounting position	vertical
Power dissipation	4.6 W
Vibration test	V=0 00000 0 0 000= V0
Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Glow-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	



2200539

https://www.phoenixcontact.com/us/products/2200539

Time of exposure	30 s
Thermal stability / ball thrust test	
Specification	IEC 60695-10-2:2014-02
Temperature	125 °C
Test duration	1 h
Force	20 N
Mechanical strength / tumbling barrel	
Specification	IEC 60998-1:2002-12
Height of fall	50 cm
Frequency	10
Shocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Half-sine
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Degree of protection (IP code)	
Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
Ambient conditions	
Max. IP code to attain	IP20
Max. IP code to attain	IP20 -40 °C 105 °C (depending on power dissipation)
Max. IP code to attain Ambient temperature (operation)	-40 °C 105 °C (depending on power dissipation)
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport)	-40 °C 105 °C (depending on power dissipation)
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly)	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport)	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport)	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 %
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 %
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders Type of PCB mount	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 % 3 Insertion (optional latching by PCB stop)
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders Type of PCB mount Thickness of the PCB	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 % 3 Insertion (optional latching by PCB stop)
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders Type of PCB mount Thickness of the PCB Ounting Mounting type	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 % 3 Insertion (optional latching by PCB stop) 1.4 mm 1.8 mm DIN rail mounting
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders Type of PCB mount Thickness of the PCB Ounting Mounting type Mounting position	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 % 3 Insertion (optional latching by PCB stop) 1.4 mm 1.8 mm
Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport) CB data Number of PCB holders Type of PCB mount Thickness of the PCB Ounting Mounting type	-40 °C 105 °C (depending on power dissipation) -40 °C 55 °C -5 °C 100 °C 80 % 3 Insertion (optional latching by PCB stop) 1.4 mm 1.8 mm DIN rail mounting




2200539

https://www.phoenixcontact.com/us/products/2200539

Drawings

Dimensional drawing

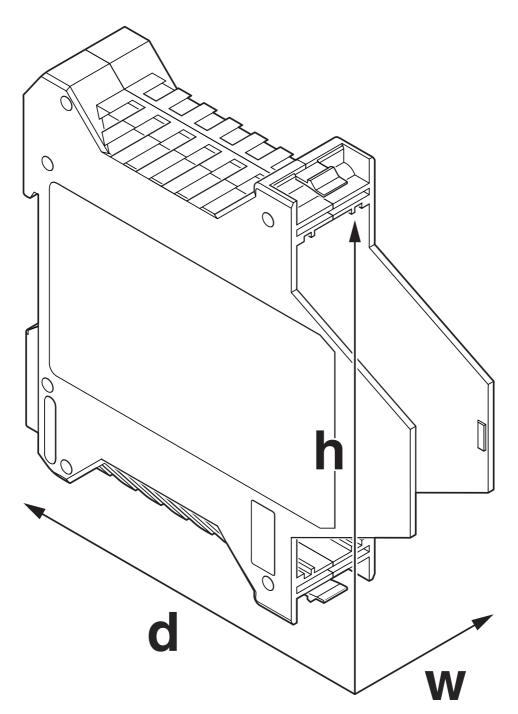

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



2200539

https://www.phoenixcontact.com/us/products/2200539

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2200539

CUL Recognized Approval ID: FILE E 60425				
	Nominal voltage $\mathbf{U}_{\mathbf{N}}$	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group B				
	300 V	8 A	-	-
Use group D				
	300 V	8 A	-	-

UL Recognized Approval ID: FILE E 60425				
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group B				
	300 V	8 A	-	-
Use group D				
	300 V	8 A	-	-

cULus Recognized



2200539

https://www.phoenixcontact.com/us/products/2200539

Classifications

ECLASS

	ECLASS-11.0	27182702	
	ECLASS-13.0	27190601	
ETIM			
	ETIM 9.0	EC001031	
UNSPSC			
	UNSPSC 21.0	31261500	



2200539

https://www.phoenixcontact.com/us/products/2200539

Environmental product compliance

EU RoHS				
Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			



2200539

https://www.phoenixcontact.com/us/products/2200539

Mandatory accessories

ME 67,5 OT-1MSTBO KMGY - Upper housing part

2200522

https://www.phoenixcontact.com/us/products/2200522



DIN rail housing, Upper housing part for connectors with header, width: 67.5 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

ME 45 OT-FKDSO KMGY - Upper housing part

2200327

https://www.phoenixcontact.com/us/products/2200327



DIN rail housing, Upper housing part for PCB terminal blocks with Push-in spring connection, width: 45.2 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)



2200539

https://www.phoenixcontact.com/us/products/2200539

ME 45 OT-MSTBO KMGY - Upper housing part

2854429

https://www.phoenixcontact.com/us/products/2854429



DIN rail housing, Upper housing part for connectors with header, width: 45.2 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

ME 45 OT-MKDSO KMGY - Upper housing part

2853255

https://www.phoenixcontact.com/us/products/2853255



DIN rail housing, Upper housing part for PCB terminal blocks with screw connection, width: 45.2 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)



2200539

https://www.phoenixcontact.com/us/products/2200539

ME 22,5 OT-MSTBO KMGY - Upper housing part

2907761

https://www.phoenixcontact.com/us/products/2907761



DIN rail housing, Upper housing part for connectors with header, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

ME 22,5 OT-FKDSO KMGY - Upper housing part

2200323

https://www.phoenixcontact.com/us/products/2200323



DIN rail housing, Upper housing part for PCB terminal blocks with Push-in spring connection, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)



2200539

https://www.phoenixcontact.com/us/products/2200539

ME 22,5 OT-MKDSO KMGY - Upper housing part

2908469

https://www.phoenixcontact.com/us/products/2908469



DIN rail housing, Upper housing part for PCB terminal blocks with screw connection, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

ME 22,5 OTU-MKDSO KMGY - Upper housing part

2278953

https://www.phoenixcontact.com/us/products/2278953



DIN rail housing, Upper housing part for PCB terminal blocks with screw connection, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)



2200539

https://www.phoenixcontact.com/us/products/2200539

ME 22,5 OT-1MSTBO KMGY - Upper housing part

2914877

https://www.phoenixcontact.com/us/products/2914877



DIN rail housing, Upper housing part for connectors with header, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

ME 22,5 OT-3MSTBO KMGY - Upper housing part

2914880

https://www.phoenixcontact.com/us/products/2914880



DIN rail housing, Upper housing part for connectors with header, width: 22.6 mm, height: 102 mm, depth: 60.15 mm, color: light grey (similar RAL 7035)



2200539

https://www.phoenixcontact.com/us/products/2200539

ME 22,5 OTP-MSTBO PS KMGY - Upper housing part

2279282

https://www.phoenixcontact.com/us/products/2279282



DIN rail housing, Upper housing part for connectors with header, width: 22.6 mm, height: 99 mm, depth: 45.85 mm, color: light grey (similar RAL 7035)

Accessories

ME LPZS - PCB stop

2906911

https://www.phoenixcontact.com/us/products/2906911



DIN rail housing, after approx. 4 cm, the ME LPZS PCB pull-out stop prevents the PCB from being removed completely and locks the PCB in place



2200539

https://www.phoenixcontact.com/us/products/2200539

ME-SAS - Shield connection clamp

2853899

https://www.phoenixcontact.com/us/products/2853899

Shield connection clamp for terminal points starting from 2.5 \mbox{mm}^2




ME LP - PCB

2906908

https://www.phoenixcontact.com/us/products/2906908

PCB, for custom fitting, with contact to DIN rail (EN 60715)





2200539

https://www.phoenixcontact.com/us/products/2200539

MC 1,5/10-ST-3,81 BK - PCB connector

1839733

https://www.phoenixcontact.com/us/products/1839733



PCB connector, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, contact connection type: Socket, number of potentials: 10, number of rows: 1, number of positions: 10, number of connections: 10, product range: MC 1,5/..-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, pin layout: Linear three-way pinning, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

MC 1,5/10-ST-3,81 BK AU - PCB connector

1771978

https://www.phoenixcontact.com/us/products/1771978



PCB connector, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Socket, number of potentials: 10, number of rows: 1, number of positions: 10, number of connections: 10, product range: MC 1,5/..-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, pin layout: Linear three-way pinning, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard



2200539

https://www.phoenixcontact.com/us/products/2200539

IMC 1,5/10-ST-3,81 BK AU - PCB connectors

1770746

https://www.phoenixcontact.com/us/products/1770746



PCB connector, nominal cross section: 1.5 mm², color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 10, number of rows: 1, number of positions: 10, number of connections: 10, product range: IMC 1,5/..-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

EML (44X64)R-ME - Label for ME ... UT ... BUS ... housing

0828266

https://www.phoenixcontact.com/us/products/0828266



Label for ME ... UT ... BUS ... housing, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting type: adhesive, lettering field size: 44 x 64 mm, Number of individual labels: 200

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com