

Actuator

17-2A0357

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-2A0357>

Your product:



17-2A0357 Actuator

FRONT

Reflector:	Metal, polished chromium-plated
Front form:	round
Front dimension:	Ø 16 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 14 mm

OPERATING-/INDICATION PART

Illumination colour:	Blue
----------------------	------

ELECTRICAL CHARACTERISTICS

Operation current:	9 - 17 mA \pm 15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	500 mcd
Operating voltage:	24 V AC/DC

MECHANICAL CHARACTERISTIC

Weight:	0.014 kg
Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm

AMBIENT CONDITION


IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Operating temperature:	– 20 °C ... + 60 °C
Storage temperature:	– 25 °C ... + 80 °C

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER


Kind of illumination:	Single-LED
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Short Description:	Actuator, Ø 14 mm, Ø 16 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Blue
Mounting cut-outs:	

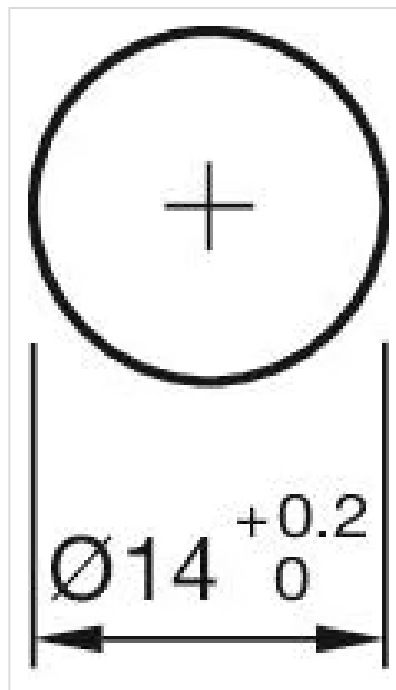

Wiring diagrams:

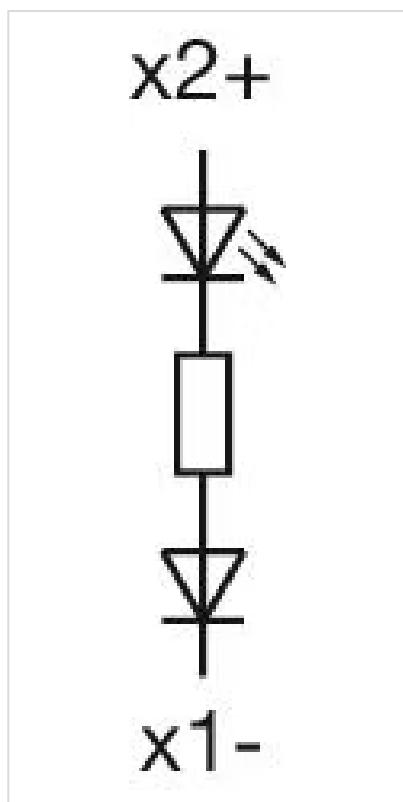

Dimension drawings:

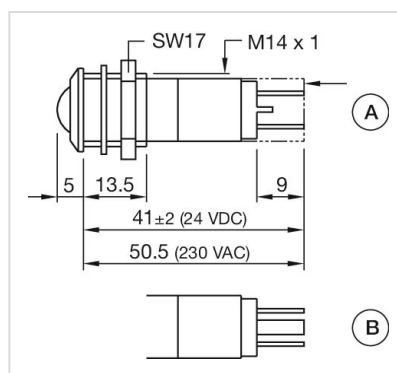

A = Protection tube (only 230 VAC)
B = Tri-colour