


Actuator

704.009.2

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/704.009.2>

Your product:

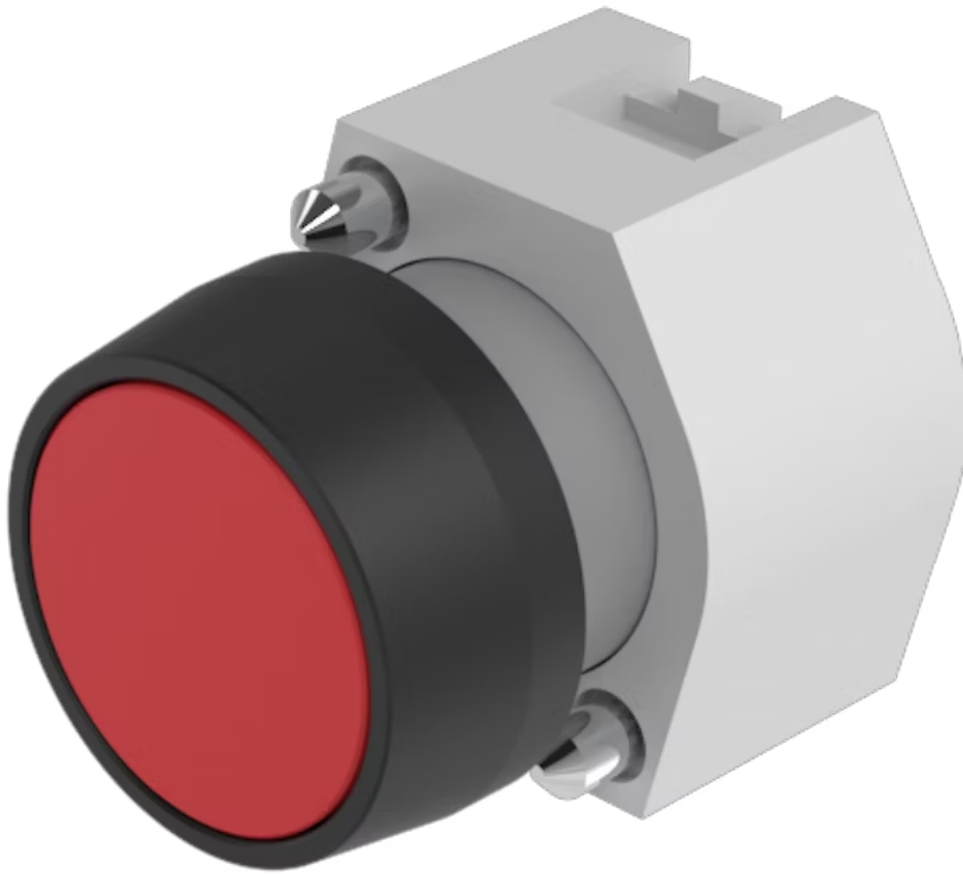

704.009.2 Actuator

FRONT

Front bezel colour:	Black
Front dimension:	Ø 29 mm
Front form:	round
Front bezel material:	Plastic

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens optics:	transparent
Lens material:	Plastic
Lens colour:	Red
Lens shape:	flush
Lens illumination:	non illuminative

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Weight:	0.04 kg
Operating Travel:	ca. 5.8 mm ± 0.2 mm

Operating force: 8 N

Mechanical lifetime: ≤3 Mio. cycles of operation

AMBIENT CONDITION

Operating temperature: – 40 °C ... + 55 °C

Storage temperature: – 40 °C ... + 85 °C

IP Protection: IP65 front side

OTHER

Housing material: Plastic


max. number of switching elements: 3

Hints: Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on

Housing colour: Grey


Short Description: Actuator, Ø 29 mm, flush, non illuminative, Red, Plastic, transparent, round, Black, Plastic, Momentary

Mounting cut-outs:

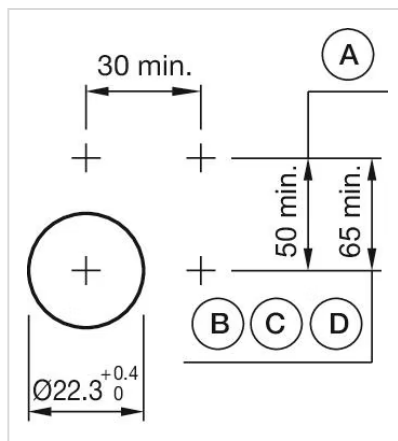

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

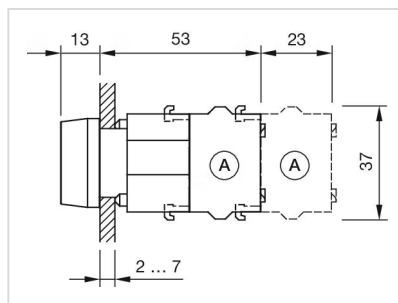

A = Screw terminal

Wiring diagrams:

E---