

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, contact surface: Sn, contact connection type: Socket, number of potentials: 7, number of rows: 1, number of positions: 7, number of connections: 7, product range: GMVSTBW 2,5/..-STF-EX, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: -90 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5 EX, locking: Screw locking mechanism, mounting: Screw flange, type of packaging: packed in cardboard

## Your advantages

- Well-known connection principle allows worldwide use
- Satisfies the more stringent safety requirements of “Ex eb” protection according to IEC 60079-7 for potentially explosive areas
- Screwable flange for superior mechanical stability
- Low temperature rise, thanks to maximum contact force

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1810052                        |
| Packing unit                         | 50 pc                          |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | AA03                           |
| Product key                          | AACAMK                         |
| Catalog page                         | Page 379 (C-1-2013)            |
| GTIN                                 | 4046356706087                  |
| Weight per piece (including packing) | 19 g                           |
| Weight per piece (excluding packing) | 18.068 g                       |
| Customs tariff number                | 85366990                       |
| Country of origin                    | DE                             |

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Technical data

### Product properties

|                       |                        |
|-----------------------|------------------------|
| Product type          | PCB connector          |
| Product family        | GMVSTBW 2,5/...-STF-EX |
| Product line          | COMBICON Connectors M  |
| Type                  | Standard               |
| Number of positions   | 7                      |
| Pitch                 | 7.62 mm                |
| Number of connections | 7                      |
| Number of rows        | 1                      |
| Number of potentials  | 7                      |
| Mounting flange       | Screw flange           |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 02 |
|------------------|----|

### Electrical properties

|                                         |                          |
|-----------------------------------------|--------------------------|
| Nominal current $I_N$                   | 12 A                     |
| Nominal voltage $U_N$                   | 352 V                    |
| Rated current / conductor cross section | 12 A/2.5 mm <sup>2</sup> |

### Ex data

#### Ex approval

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Identification                  | 0344 <sup>®</sup> II 2GD / Ex eb IIC Gb |
| EU-type examination certificate | KEMA 10ATEX0196 U                       |
| IECEx certificate               | IECEx KEM 10.0093U                      |

### Connection data

#### Connection technology

|                         |                      |
|-------------------------|----------------------|
| Type                    | Standard             |
| Connector system        | COMBICON MSTB 2,5 EX |
| Nominal cross section   | 2.5 mm <sup>2</sup>  |
| Contact connection type | Socket               |

#### Interlock

|                   |                         |
|-------------------|-------------------------|
| Locking type      | Screw locking mechanism |
| Mounting flange   | Screw flange            |
| Tightening torque | 0.3 Nm                  |

#### Conductor connection

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Connection method                  | Screw connection with tension sleeve        |
| Conductor/PCB connection direction | -90 °                                       |
| Conductor cross section rigid      | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

|                                                                                           |                          |
|-------------------------------------------------------------------------------------------|--------------------------|
| Conductor cross section flexible                                                          | 0.2 mm² ... 2.5 mm²      |
| Conductor cross section AWG                                                               | 24 ... 12                |
| Conductor cross section flexible, with ferrule without plastic sleeve                     | 0.25 mm² ... 2.5 mm²     |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                      | 0.25 mm² ... 2.5 mm²     |
| 2 conductors with same cross section, solid                                               | 0.2 mm² ... 1 mm²        |
| 2 conductors with same cross section, flexible                                            | 0.2 mm² ... 1.5 mm²      |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm² ... 1 mm²       |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm² ... 1 mm²        |
| Cylindrical gauge a x b / diameter                                                        | 2.8 mm x 2.0 mm / 2.4 mm |
| Stripping length                                                                          | 7 mm                     |
| Drive form screw head                                                                     | Slotted (L)              |
| Tightening torque                                                                         | 0.5 Nm ... 0.6 Nm        |

## Specifications for ferrules without insulating collar

|                           |                    |
|---------------------------|--------------------|
| recommended crimping tool | 1212034 CRIMPFOX 6 |
|---------------------------|--------------------|

## Specifications for ferrules with insulating collar

|                           |                    |
|---------------------------|--------------------|
| recommended crimping tool | 1212034 CRIMPFOX 6 |
|---------------------------|--------------------|

## Material specifications

### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)                                                                |
| Metal surface contact area (top layer)   | Tin (4 - 8 µm Sn)                                                                |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Color (Housing)                                                   | green (6021) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |


## Dimensions

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

|                                                                                    |          |
|------------------------------------------------------------------------------------|----------|
| Dimensional drawing                                                                |          |
|  |          |
| Pitch                                                                              | 7.62 mm  |
| Width [w]                                                                          | 51.3 mm  |
| Height [h]                                                                         | 26 mm    |
| Length [l]                                                                         | 12.52 mm |

## Mounting

|                   |        |
|-------------------|--------|
| Flange            |        |
| Tightening torque | 0.3 Nm |

## Notes

|                    |                                                                                                                                                                                          |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Environmental and real-life conditions

|                                         |                   |
|-----------------------------------------|-------------------|
| Ambient conditions                      |                   |
| Ambient temperature (operation)         | -60 °C ... 110 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C  |
| Relative humidity (storage/transport)   | 30 % ... 70 %     |
| Ambient temperature (assembly)          | -5 °C ... 100 °C  |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector




1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Drawings

Dimensional drawing

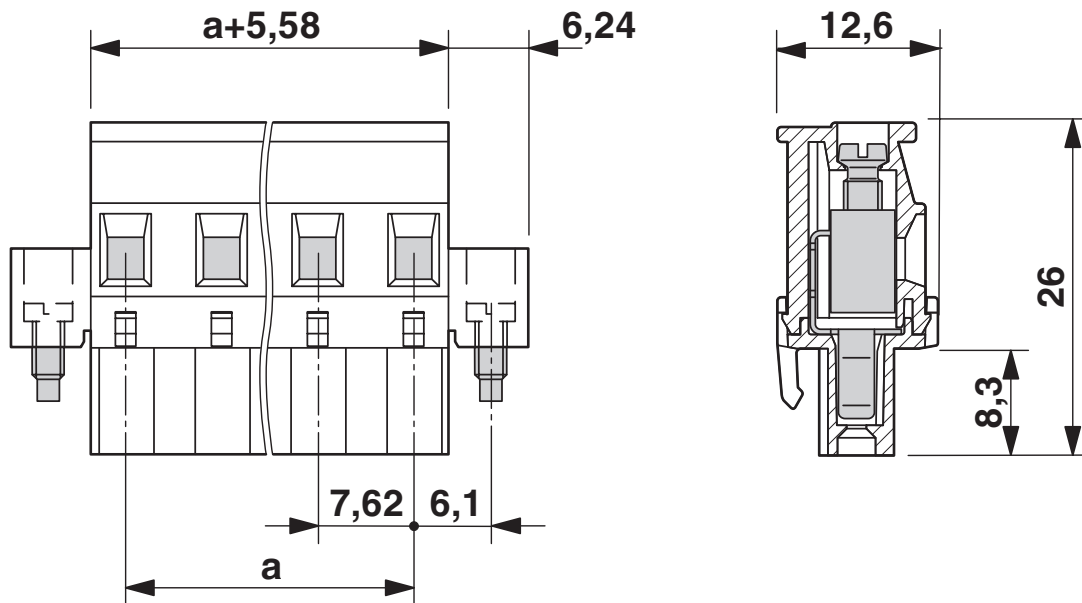

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460202 |
| ECLASS-12.0 | 27460202 |
| ECLASS-13.0 | 27460202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002638 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)