


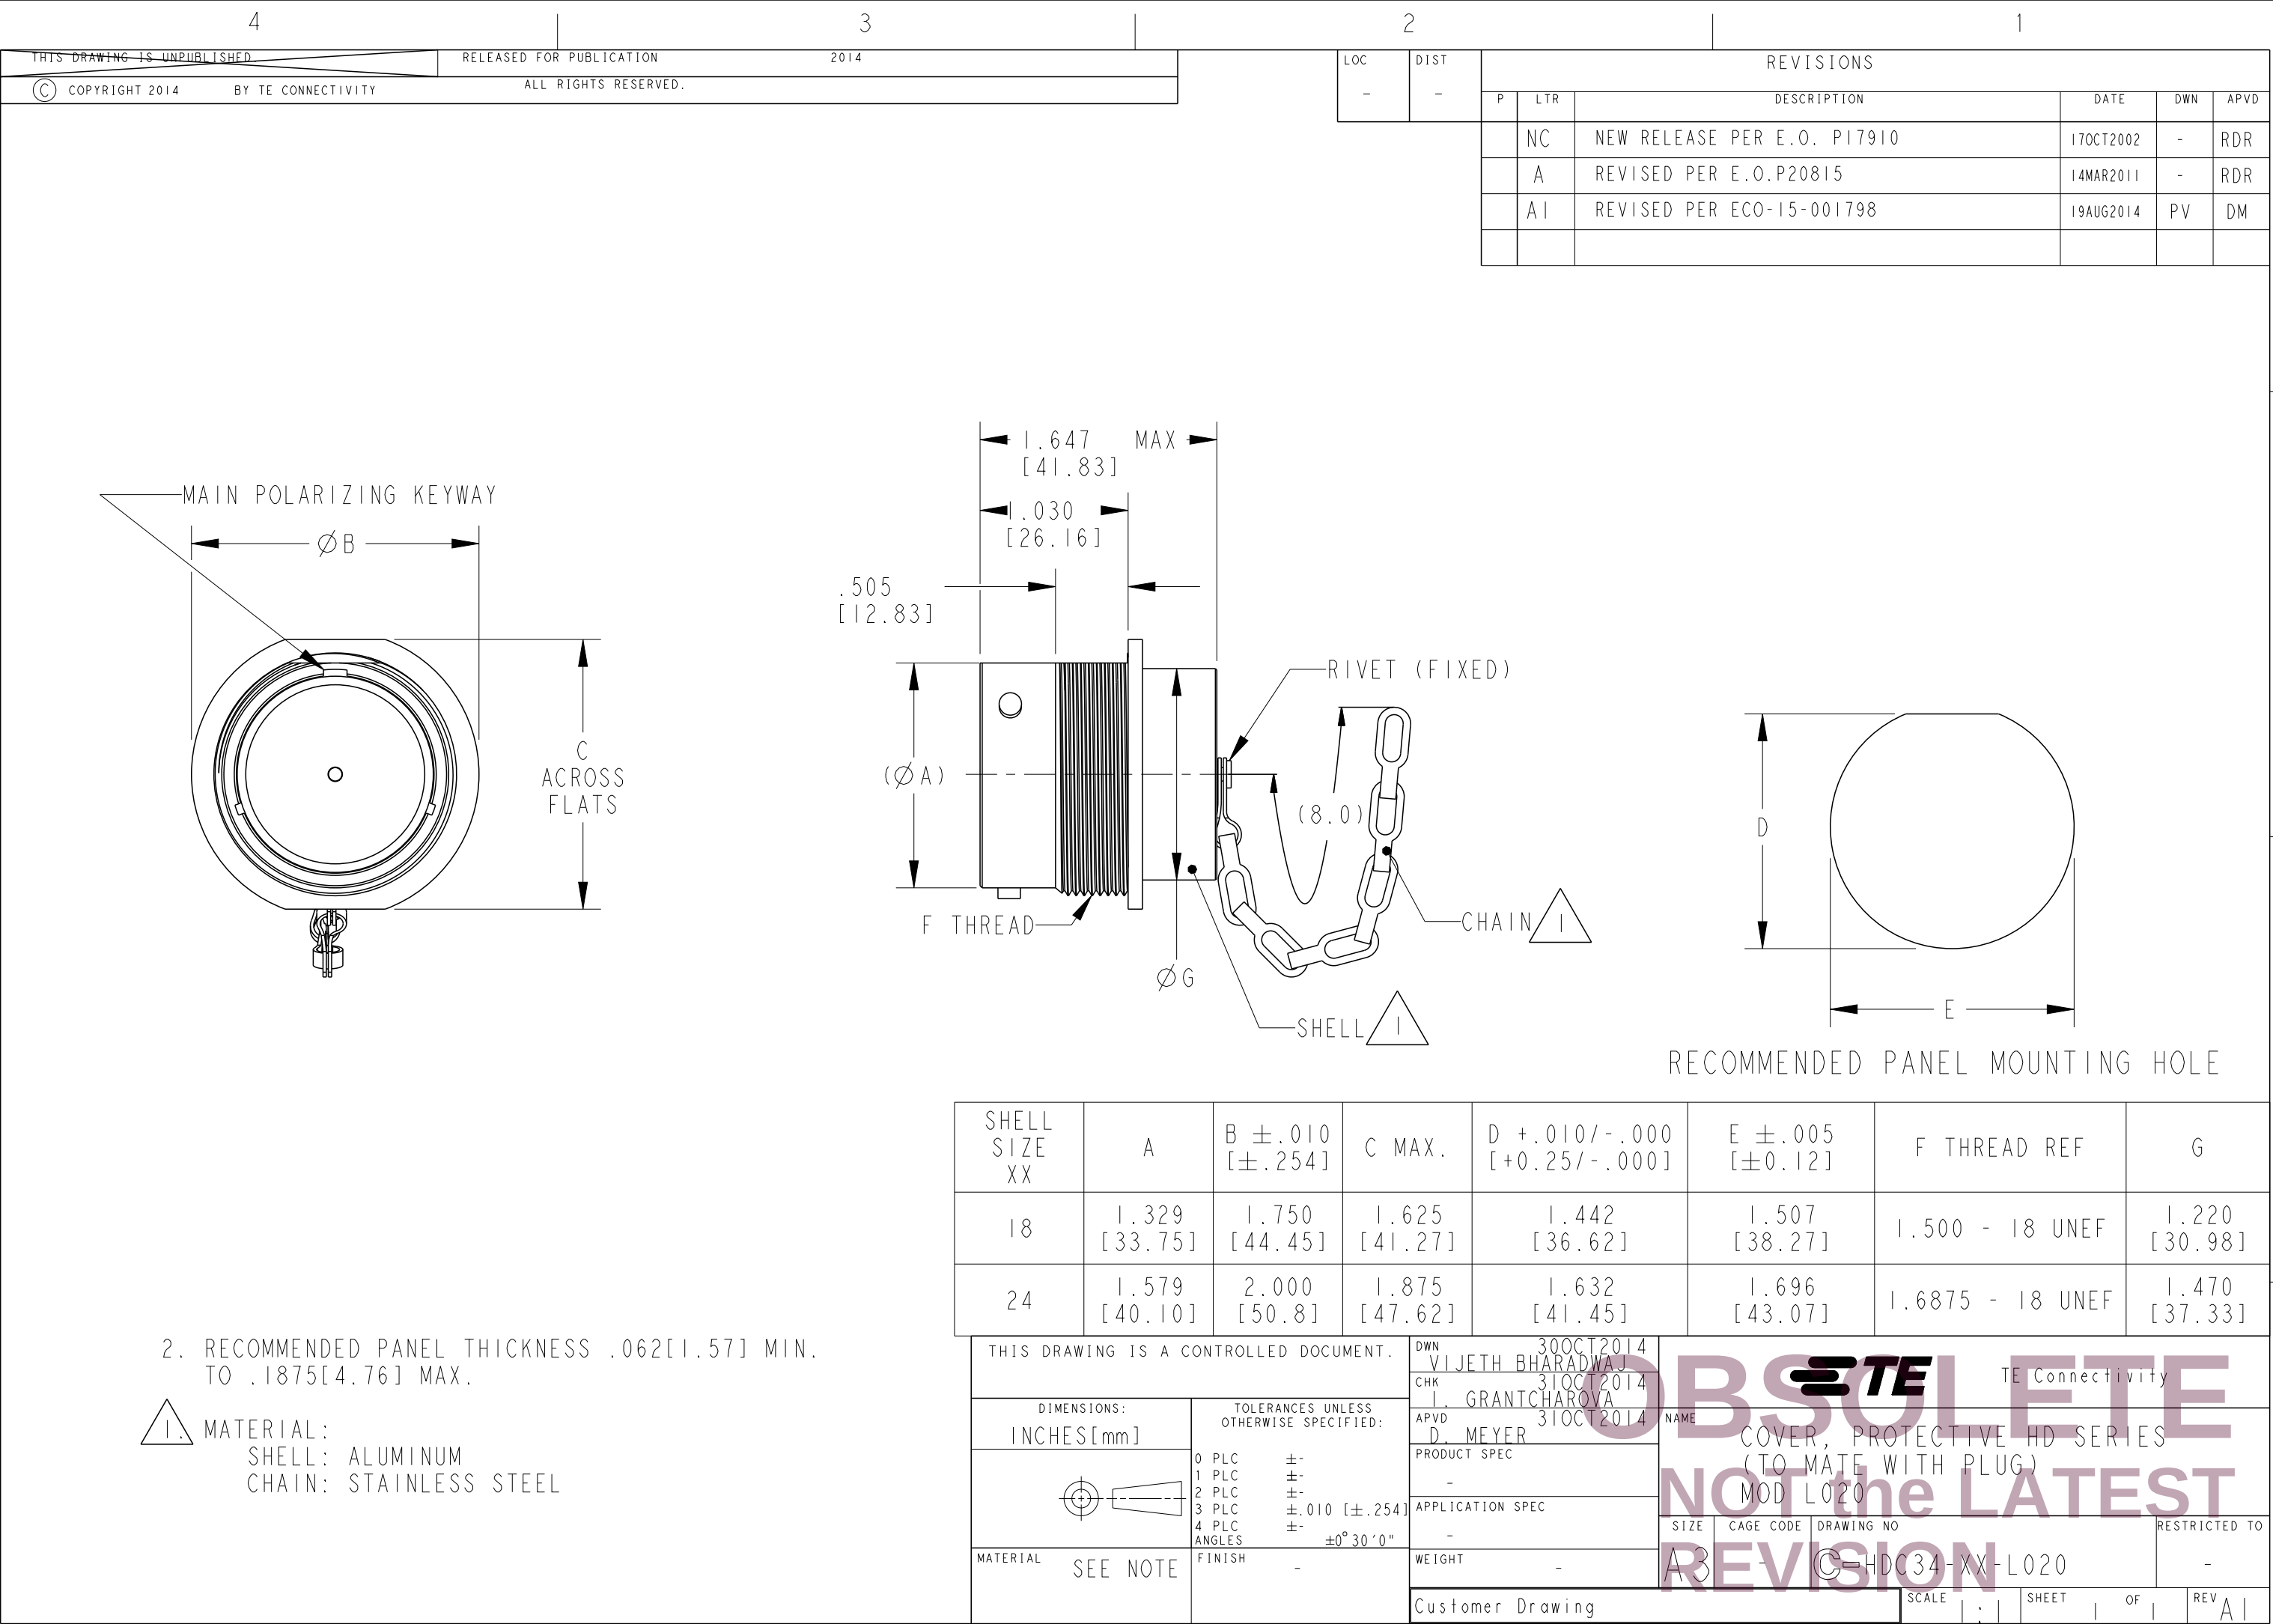

MAIN POLARIZING KEYWAY

ØB

C

ACROSS FLATS

ØA

F THREAD

ØG

1.647

[41.83]

MAX

.030

[26.16]

.505

[12.83]

RIVET (FIXED)

(8.0)

CHAIN

SHELL

D

E

RECOMMENDED PANEL MOUNTING HOLE

2. RECOMMENDED PANEL THICKNESS .062[1.57] MIN. TO .1875[4.76] MAX.

1. MATERIAL:

SHELL: ALUMINUM

CHAIN: STAINLESS STEEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

30OCT2014

VIJETH BHARADWAJ

CHK

31OCT2014

I. GRANTCHAROVA

APVD

31OCT2014

D. MEYER

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

Customer Drawing

DIMENSIONS:

INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±-

2 PLC ±-

3 PLC ±.010 [±.254]

4 PLC ±-

ANGLES ±0°30'0"

FINISH -

MATERIAL

SEE NOTE

NAME

COVER, PROTECTIVE HD SERIES (TO MATE WITH PLUG) MOD L020

SIZE

A3

CAGE CODE

C-HDC34-XX-L020

DRAWING NO

-

RESTRICTED TO

-

SCALE

1:1

SHEET

1

OF

1

REV

AI

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HDC34-18-L020](#)