


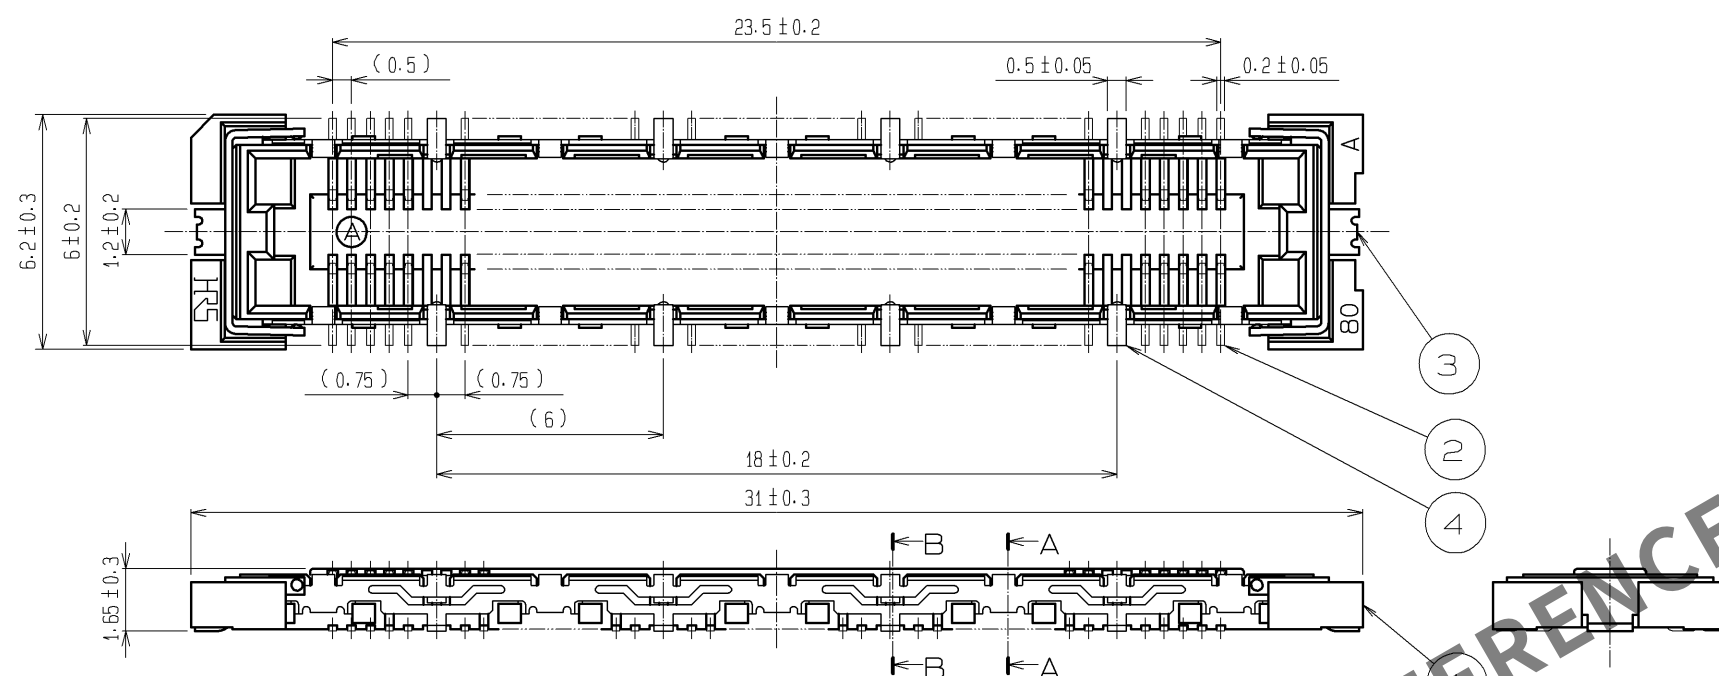
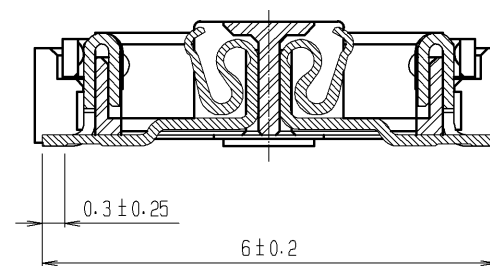




RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

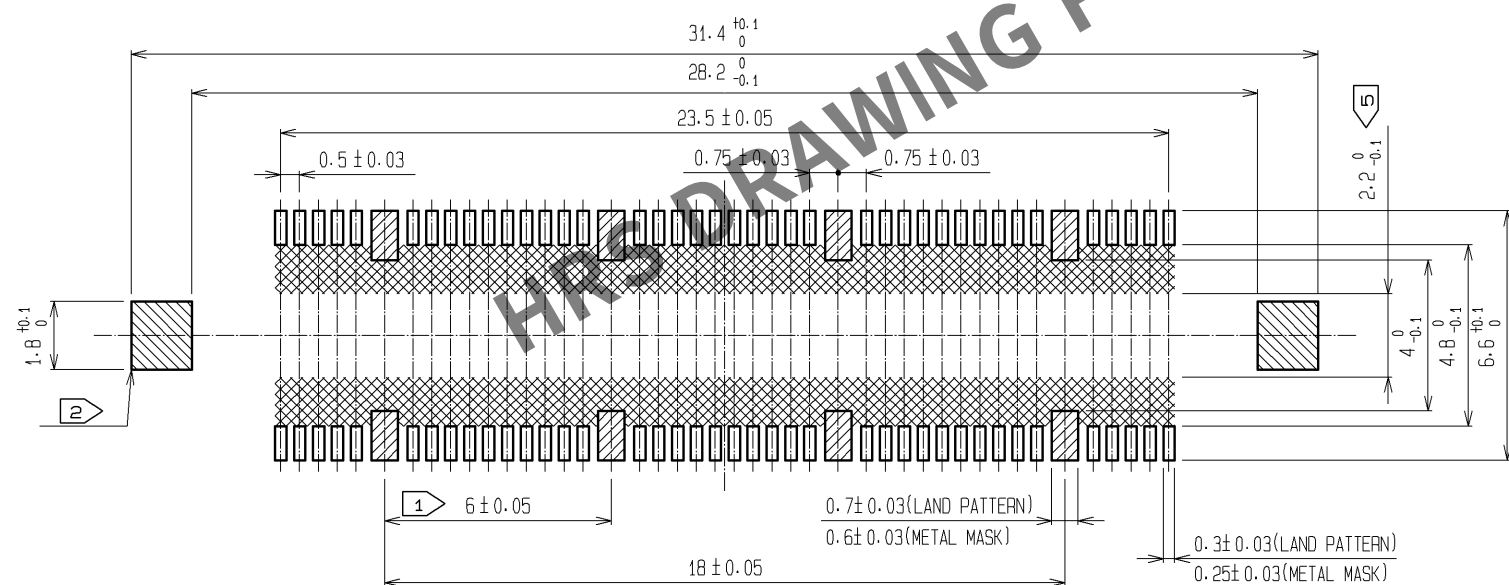

B-B (10 : 1)

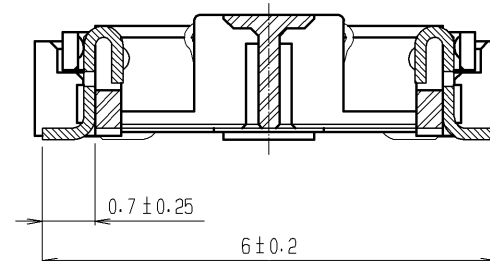

- NOTES
- ④ 8 HATCHED  PARTS:GROUND CIRUIT.
 - ⑤ 2 HATCHED  PARTS:GROUND CIRUIT.
 - 3 SMT LEAD-COPLANARITY:0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1		LCP		BEIGE UL94V-0		3, 4		PHOSPHOR BRONZE		TIN PLATING	
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS	
UNITS mm				SCALE 5 : 1				COUNT		DESCRIPTION OF REVISIONS	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		09. 10. 19		DRAWING NO.		EDC3-152113-25			
		CHECKED : HT. YAMAGUCHI		09. 10. 19		PART NO.		FX11LB-80S/8-SV(71)			
		DESIGNED : SY. KAMIGA		09. 10. 17		CODE NO.		CL573-0113-8-71			
		DRAWN : HK. SUNADORI		09. 10. 16							