

RoHS

MAPX

MODIFICATION

DRW

DATE

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levot
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:


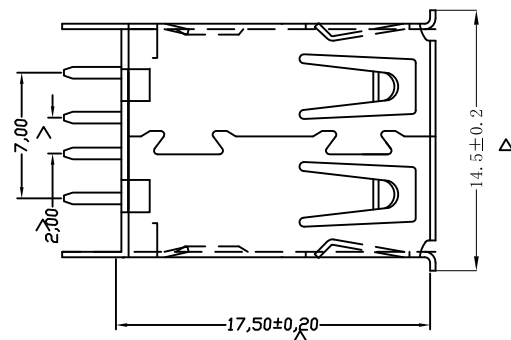
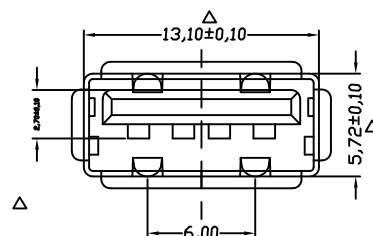
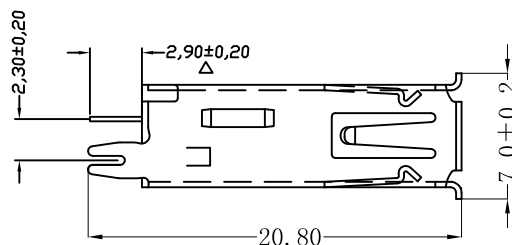
- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
- 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Matorial:

- 塑胶:Housing:
Hing Temperature Tnermaplastics,
Ul 94V-0 PBT White/Black
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 外壳:Shell:
Nickel Plating

P.C.B Layout

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-352A101BY10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF180度17.5鱼叉脚有边铜壳白胶
日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	
				版本 VER	A0