


A PERFECT ALLIANCE.



ODU AMC[®] HIGH-DENSITY

Innovation in a Compact Package

MINIATURE CONNECTORS



AUGUST 2018 EDITION

ODU AMC[®] HIGH-DENSITY

ODU AMC[®]

odu-usa.com

A PERFECT ALLIANCE.



A PERFECT ALLIANCE.

ODU GROUP OVERVIEW

- More than 75 years of experience in connector technology
- Over 1,900 employees worldwide
- 9 sales subsidiaries in China, Denmark, France, Germany, Italy, Japan, Sweden, the UK and the US as well as 5 production and logistics sites
- All technologies under one roof: Design and development, machine tool and special machine construction, injection, stamping, turning, surface technology, assembly and cable assembly
- We operate in the following markets: medical, military and security, test & measurement, industrial, energy, and mobility

As of February 2018

CERTIFIED QUALITY

- DIN EN ISO 9001
- IATF 16949
- DIN EN ISO 14001
- ISO 13485
- Wide range of UL, CSA, VG and DVA licenses
- UL certified cable assembly

For a complete list of our certifications, please visit our website.

CUSTOMER-SPECIFIC SOLUTIONS


Contacts, connectors and integrated cable assembly solutions meeting the most demanding technical market requirements – ODU's connector solutions and value-added services are characterized by their exclusive focus on meeting the customer's needs.

- Precise implementation of application-specific requirements regarding design, functionality, cost and exclusivity
- Custom connector solutions derived from standard products
- One-to-one local expertise and fair, friendly consulting
- Quick prototyping and production turnaround

All dimensions are in mm. Some figures are for illustrative purposes only. Subject to change without notice. Errors and omissions excepted. We reserve the right to change our products and their technical specifications at any time in the interest of technical improvement. This publication supersedes all prior publications. This publication is also available as a PDF file that can be downloaded from www.odu-usa.com.

Data transmission protocols

These ODU specific connectors can transmit common data transmission protocols such as HDMI® 2.0, USB® 3.1 Gen1, Ethernet, and Ethernet CAT5, but they are not HDMI®, USB®, Ethernet- and Ethernet CAT5- standard connectors.

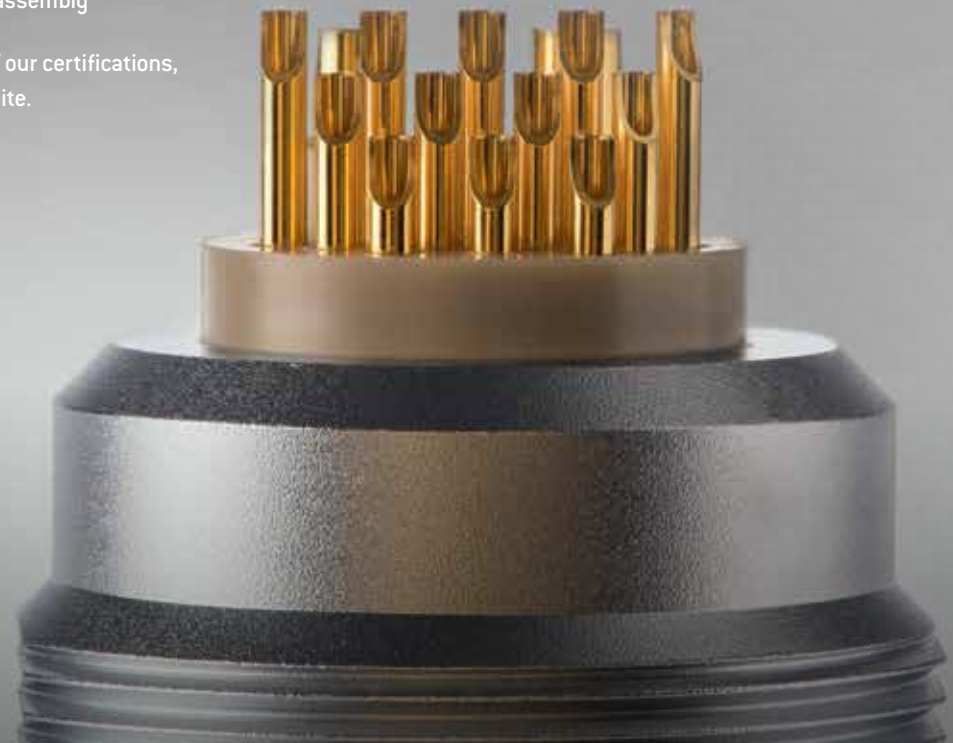

CREATING CONNECTIONS, BUILDING ALLIANCES, COLLABORATING INTO THE FUTURE



Dr.-Ing. Kurt Woelfl

Managing Director

Corporate Development, Engineering, Finance/Controlling, Human Resources, IT & Business Processes, Production, Quality Management, Research & Development, Supply Chain Management

Denis Giba

Managing Director

Corporate Communications/Marketing, Corporate Development, Portfolio Management, Sales

TECHNOLOGY THAT UNITES – CONNECTIONS THAT INSPIRE

For over 75 years, this commitment has enabled us to innovate and provide solutions that respond to continuously changing market needs. We provide high-quality electrical connectors that create added value for our customers and any market player seeking a reliable connector solution to enable the transmission of power, signals, media and data transmission.

A PERFECT ALLIANCE is our guiding principle. It represents the synergy between our high-quality connector solutions and the strong partnerships we build with our staff and business partners across the globe – partnerships based on trust, reliability and mutual respect.

ODU is one of the world's leading suppliers of connector systems today, employing over 1,900 people worldwide and generating approximately €170 million in sales. To ensure the very highest quality standards in our cutting-edge products, we continuously invest in their development and production – and ultimately, in our very unique expertise. Over the past few years, our development of customer- and application-specific connectors has led to the sustained growth of our standard product range so that today, we cover a broad range of application areas. A balance between project-specific

business, including customized developments, and standard connector design will continue to shape our business into the future. This holds true for emerging and future markets, such as medical, military and security, and energy, as well as for the special requirements of measurement and testing, eMobility and industrial electronics.

A PERFECT ALLIANCE – The future of ODU will continue to find solid ground for growth: in our focus on providing reliable connector solutions for a variety of challenging applications and in our commitment to continuously expanding our technology portfolio. It's what we do and who we are – around the globe. This brochure is an invitation for you to become even better acquainted with ODU, an internationally active technology company devoted to creating high-quality customized connector solutions.

We are actively shaping the future of our company with creativity, imagination and innovation in order to serve our valued customers around the world.

ODU – A PERFECT ALLIANCE.

The Managing Directors:


Dr.-Ing. Kurt Woelfl and Denis Giba

ODU AMC® HIGH-DENSITY

INNOVATION IN A COMPACT PACKAGE

COMPACT DESIGN

Reliability as well as electrical and mechanical robustness in spite of the compact design





HIGH CONTACT DENSITY

Contact density up to 40 contacts in a minimum design

SYSTEM SOLUTION

Innovative options for assembly and extrusion for the cable strain relief



From medical technology to consumer electronics to automotive technology: the trend towards miniaturization continues. High-Density connectors provide the highest possible number of contacts in the most compact space. They offer new possibilities and solutions while simultaneously challenging the manufacturer. At all time the connectors' reliability and electrical and mechanical robustness must remain intact despite its compact size.

ODU AMC® product portfolio was created to improve the capabilities of the next generation military systems. ODU AMC® and ODU AMC® High-Density are advanced miniature connector solution for military applications that require significant weight and space reduction such as: helmet mounted-cameras, group voice and data radios, headsets, GPS antennas and navigation modules, battery packs, computer/PAN, wrist –worn displays or rifle mounted systems and vehicle adaptations.

The ODU AMC® High-Density connector series offer high performance data transmission, high reliability and easy handling. The product portfolio includes a USB® 3.1 Gen 1¹, USB® 2.0¹, Ethernet¹ and an HDMI^{®1} option.

Providing significantly reduced weight up to 70% and fully integrated cable assembly solutions, and in shell diameters as small as 10mm up to 18.5mm (40 contacts), the ODU AMC® High-Density includes numerous high density signal configurations and tailored versions for power (up to 15A) and data transfer (USB® 3.1 Gen 1¹ with 5A power) in a very compact package.


The shells are keyed and color-coded to ensure reliable and simple handling. Other product features include watertight protection class IP 68 (up to 20 meters), 5000 mating cycles durability, a Break-Away function for maximum safety, rugged & non-reflective surfaces, salt spray resistance, high-speed data transfer capability and an operating temperature range of -51° C (-60° F) to +125° C (+257° F).

ODU provides the full suite of complementary products and services including innovative options for cable assembly, rapid prototyping and product development, local engineering support, as well as overmolding and turn-key system solutions.

THE EVOLUTION OF MINIATURIZATION


2000

ODU MINI-SNAP® Series K
Size 0/7 contacts/IP 68




2010

ODU AMC® Series
Size 0/7 contacts/IP 68
45% smaller than ODU MINI-SNAP series K



2014

ODU AMC® High-Density
Size 00/7 contacts/IP 68
35% smaller than ODU AMC series



ODU AMC® HIGH-DENSITY AT A GLANCE

Salt Spray
resistance

Tested according
MIL Standards

Power up to
15A

Up to
5,000 mating
cycles

Up to
40 Contacts
[size 1.5]

Rugged solid
construction


Break-Away
for maximum safety

Mechanical Keying
with matched color code



ONE PC-BOARD FOR ALL SIZES

All standard sizes can be processed at the same connection level.
This allows us to place signals, data and power in various connector sizes on one PCB height – as a basic requirement for a compact system design.

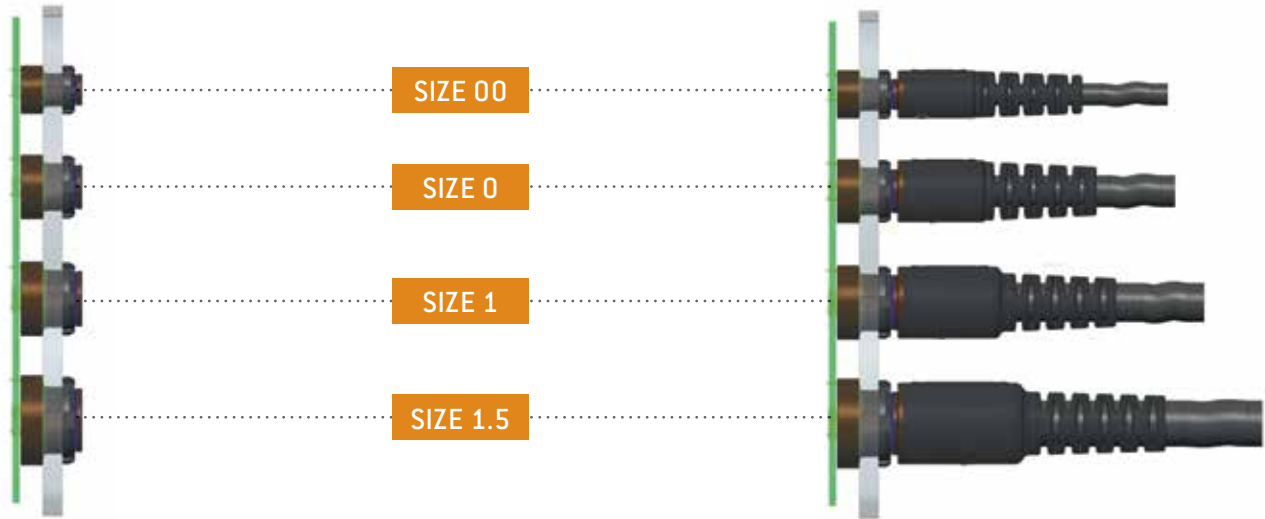

FOUR SHELL SIZES FOR MAXIMUM FLEXIBILITY

SIZE 00

- 2 way
- 4 way
- 7 way
- 4 way USB® 2.0¹

SIZE 0

- 9 way [15A Power + USB® 2.0]
- 12 way [USB® 3.1 Gen 1¹ + 5A Power]
- 16 way [Signal + Data]

SIZE 1

- 27 way [Signal + Data]

SIZE 1.5

- 40 way
- Multi I/O [Signal + Data]

PANEL CUT-OUT DIAMETER

7 mm

10 mm

12 mm

14 mm

fig. approx. 1:1



RELIABLE AND ROBUST CODING

BROWN

RED

BLUE


GREEN



A1: BREAK-AWAY PLUG



DIMENSIONS AND DETAILS

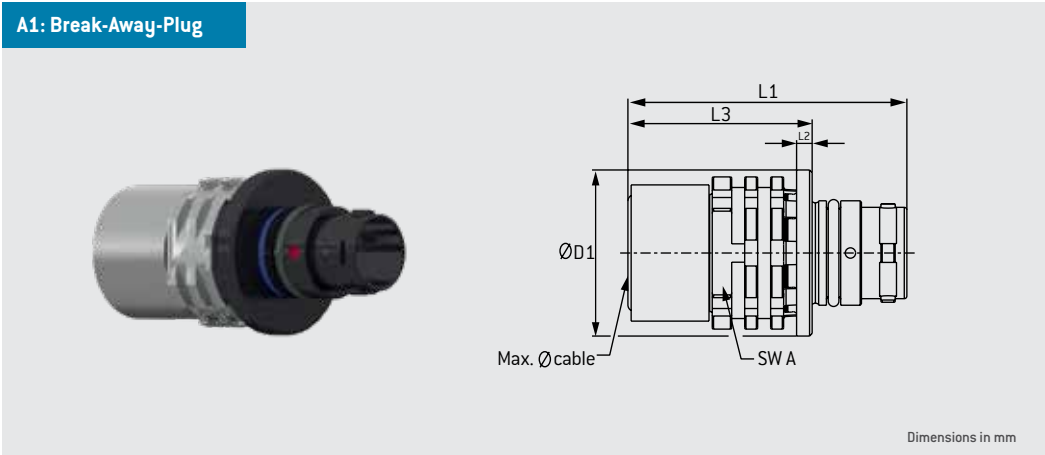

Size	L1	L2	L3	D1	SW A	Max. Ø cable
00	20.0	1.2	12.8	9.8	8.0	5.0
0	21.5	1.2	14.2	12.8	10.0	7.0
1	25.2	1.2	18.0	14.8	12.0	8.5
1.5	29.2	1.2	22.0	16.8	14.0	10.5

CONTACT CONFIGURATIONS

Shell size	Part number	Layout	Number of contacts	Max. current ²		Suitable for
				Single contact load	Soldercup	
00	A1CW*M-P02XCE0-0000		02	3 A	2 x AWG 24 (Power)	Power
	A1CW*M-P04XBC0-0000		04	1 A	4 x AWG 28	Signal
	A1CW*M-PU4XBM0-0000		04	1 A	2 x AWG 28 (Signal Lines)	USB® 2.0 ¹
				3 A	2 x AWG 24 (Power)	
0	A1CW*M-P07XBC0-0000		07	1 A	7 x AWG 28	Signal
	A10W*M-P09XMM0-0000		09	1 A	3 x AWG 28 (Signal Lines)	USB® 2.0 ¹ + Power
				5 A	6 x AWG 22 (Power)	
	A10W*M-P12XMM0-0000		12	1 A	10 x AWG 28 (Signal Lines)	USB® 3.1 Gen 1 ¹ + Power
				5 A	2 x AWG 22 (Power)	
	A10W*M-PI6XBC0-0000		16	1 A	16 x AWG 28	Signal
			27	1 A	27 x AWG 28	Signal
	A1AW*M-P40XBC0-0000		40	1 A	40 x AWG 28	Signal

Notes:

Substitute “*” for desired keying/color-coding option: A, B, C or D (see key to right)

Consult factory for availability.

All connectors meet or exceed 750V AC test / 250V AC operational voltage when tested according to SAE 13441.

Maximum operating voltage at sea level up to 2000m acc. to SAE 13441.

For various application the safety requirement regarding the operating voltage is even more severe. This must be evaluated during the time of equipment engineering

Consult factory for additional information and options.

A

B

C

D

BROWN

RED

BLUE


GREEN

¹Concerning data transfer protocols please note page 2

K1: IN-LINE RECEPTACLE



DIMENSIONS AND DETAILS

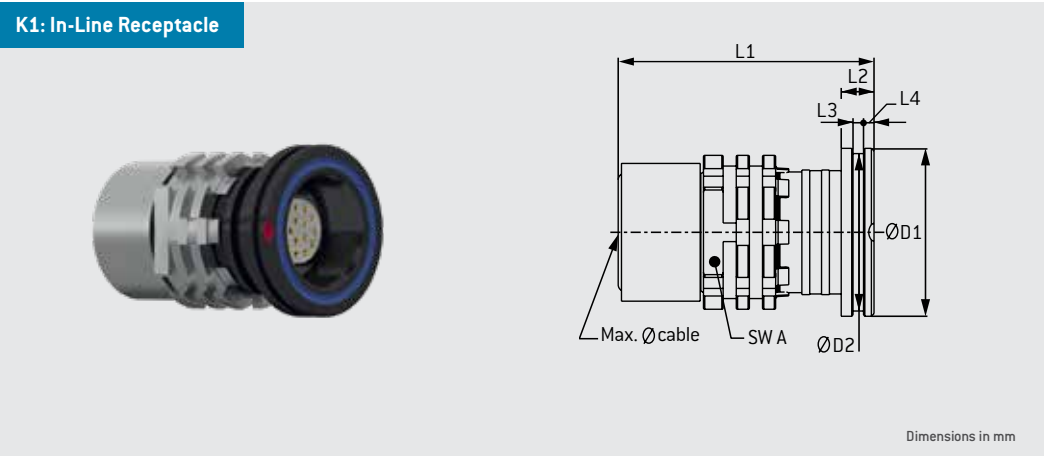

Size	L1	L2	L3	L4	D1	D2	SW A	Max. Ø cable
00	18.7	2.5	0.8	0.8	9.8	9.0	8.0	5.0
0	19.5	2.5	0.8	0.8	12.8	12.0	10.0	7.0
1	23.5	2.5	0.8	0.8	14.8	14.0	12.0	8.5
1.5	27.5	2.5	0.8	0.8	16.8	16.0	14.0	10.5

CONTACT CONFIGURATIONS

Shell size	Part number	Layout	Number of contacts	Max. current ²		Suitable for
				Single contact load	Soldercup	
00	K1CW*M-P02WCE0-0000		02	3 A	2 x AWG 24 (Power)	Power
	K1CW*M-P04WBC0-0000		04	1 A	4 x AWG 28	Signal
	K1CW*M-PU4WBM0-0000		04	1 A	2 x AWG 28 (Signal Lines)	USB® 2.0 ¹
				3 A	2 x AWG 24 (Power)	
0	K1CW*M-P07WBC0-0000		07	1 A	7 x AWG 28	Signal
	K10W*M-P09WMM0-0000		09	1 A	3 x AWG 28 (Signal Lines)	USB® 2.0 ¹ + Power
				5 A	6 x AWG 22 (Power)	
	K10W*M-P12WM M0-0000		12	1 A	10 x AWG 28 (Signal Lines)	USB® 3.1 Gen 1 ¹ + Power
				5 A	2 x AWG 22 (Power)	
	K10W*M-P16WBC0-0000		16	1 A	16 x AWG 28	Signal
1	K11W*M-P27WBC0-0000		27	1 A	27 x AWG 28	Signal
1.5	K1AW*M-P40WBC0-0000		40	1 A	40 x AWG 28	Signal

Notes:

Substitute "*" for desired keying/color-coding option: A, B, C or D (see key to right)

Consult factory for availability.

All connectors meet or exceed 750V AC test / 250V AC operational voltage when tested according to SAE 13441.

Maximum operating voltage at sea level up to 2000m acc. to SAE 13441.

For various application the safety requirement regarding the operating voltage is even more severe. This must be evaluated during the time of equipment engineering

Consult factory for additional information and options.

A BROWN

B RED

C BLUE

D GREEN


¹Concerning data transfer protocols please note page 2

GK: PANEL MOUNT RECEPTACLE


FOR WIRE TERMINATION



DIMENSIONS AND DETAILS

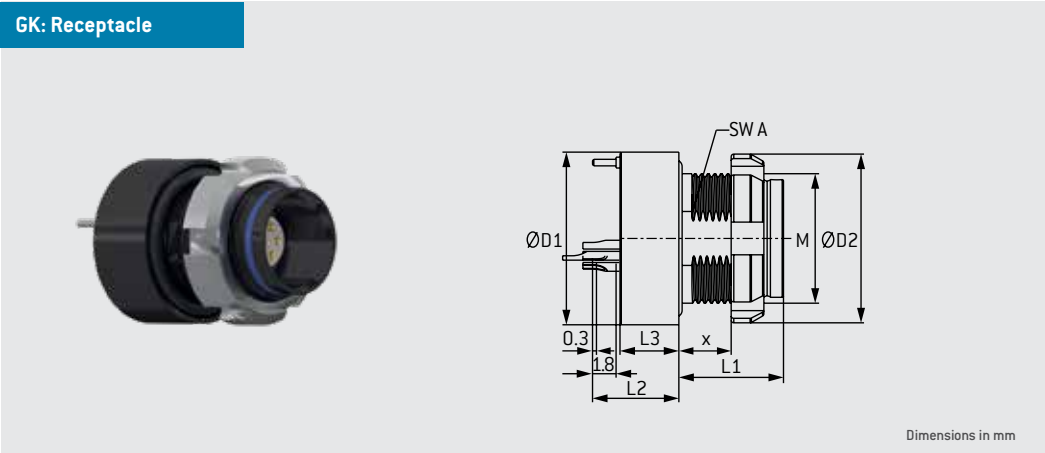

Size	L1	L2 ¹	L3	X max.	D1	D2	SW A	M	Panel cut-out	
									SW	Ø
00	8.0	6.6	4.5	4.0	10.0	10.0	6.5	7 x 0.5	6.6	7.1
0	8.0	6.6	4.5	4.0	13.2	13.0	9.0	10 x 0.5	9.1	10.1
1	8.0	6.6	4.5	4.0	15.3	15.0	11.5	12 x 0.5	11.6	12.1
1.5	8.0	6.6	4.5	4.0	18.5	18.0	13.0	14 x 0.5	13.1	14.1



CONTACT CONFIGURATIONS

Shell size	Part number	Layout	Number of contacts	Max. current ²	Max. wire size	Suitable for
				Single contact load	Soldercup	
00	GKCW*M-P02WCE0-000L		02	3 A	2 x AWG 24 (Power)	Power
	GKCW*M-P04WBC0-000L		04	1 A	4 x AWG 28	Signal
	GKCW*M-PU4WBM0-000L		04	1 A	2 x AWG 28 (Signal Lines)	USB® 2.0 ¹
				3 A	2 x AWG 24 (Power)	
0	GKCW*M-P07WBC0-000L		07	1 A	7 x AWG 28	Signal
	GK0W*M-P09WMM0-000L		09	1 A	3 x AWG 28 (Signal Lines)	USB® 2.0 ¹ + Power
				5 A	6 x AWG 22 (Power)	
	GK0W*M-P12WMM0-000L		12	1 A	10 x AWG 28 (Signal Lines)	USB® 3.1 Gen 1 ¹ + Power
				5 A	2 x AWG 22 (Power)	
1	GK0W*M-P16WBC0-000L		16	1 A	16 x AWG 28	Signal
				1 A	16 x AWG 28	Signal
	GK1W*M-P27WBC0-000L		27	1 A	27 x AWG 28	Signal
1.5	GKAW*M-P40WBC0-000L		40	1 A	40 x AWG 28	Signal

Notes:
Substitute “*” for desired keying/color-coding option: A, B, C or D (see key to right)
Consult factory for availability.

All connectors meet or exceed 750V AC test / 250V AC operational voltage when tested according to SAE 13441.
Maximum operating voltage at sea level up to 2000m acc. to SAE 13441.
For various application the safety requirement regarding the operating voltage is even more severe. This must be evaluated during the time of equipment engineering
Consult factory for additional information and options.

A	BROWN
B	RED
C	BLUE
D	GREEN

¹Concerning data transfer protocols please note page 2

GK: PANEL MOUNT RECEPTACLE

FOR PCB TERMINATION



DIMENSIONS AND DETAILS

GK: Receptacle

Dimensions in mm

Size	L1	L2 ¹	L3	X max.	D1	D2	SW A	M	Panel cut-out	
									SW	Ø
00	8.0	6.6	4.5	4.0	10.0	10.0	6.5	7 x 0.5	6.6	7.1
0	8.0	6.6	4.5	4.0	13.2	13.0	9.0	10 x 0.5	9.1	10.1
1	8.0	6.6	4.5	4.0	15.3	15.0	11.5	12 x 0.5	11.6	12.1
1.5	8.0	6.6	4.5	4.0	18.5	18.0	13.0	14 x 0.5	13.1	14.1

PANEL CUT-OUT

CONTACT CONFIGURATIONS

Shell size	Part number	Layout	Number of contacts	Max. current ²	Suitable for
				Single contact load	
00	GKCW*M-P02UC00-000L		02	3 A	Power
	GKCW*M-P04UB00-000L		04	1 A	Signal
	GKCW*M-PU4UB00-000L		04	1 A 3 A	USB® 2.0 ¹
	GKCW*M-P07UB00-000L		07	1 A	Signal
0	GK0W*M-P09UM00-000L		09	1 A 5 A	USB® 2.0 ¹ + Power
	GK0W*M-P12UM00-000L		12	1 A 5 A	USB® 3.1 Gen 1 ¹ + Power
	GK0W*M-P16UB00-000L		16	1 A	Signal
1	GK1W*M-P27UB00-000L		27	1 A	Signal
1.5	GKAW*M-P40UB00-000L		40	1 A	Signal

Notes:
Substitute “*” for desired keying/color-coding option: A, B, C or D (see key to right)
Consult factory for availability.

All connectors meet or exceed 750V AC test / 250V AC operational voltage when tested according to SAE 13441.
Maximum operating voltage at sea level up to 2000m acc. to SAE 13441.

For various application the safety requirement regarding the operating voltage is even more severe. This must be evaluated during the time of equipment engineering
Consult factory for additional information and options.

A BROWN

B RED

C BLUE

D GREEN



G6: PANEL MOUNT RECEPTACLE

FOR CABLE TERMINATION



DIMENSIONS AND DETAILS

G6: Receptacle

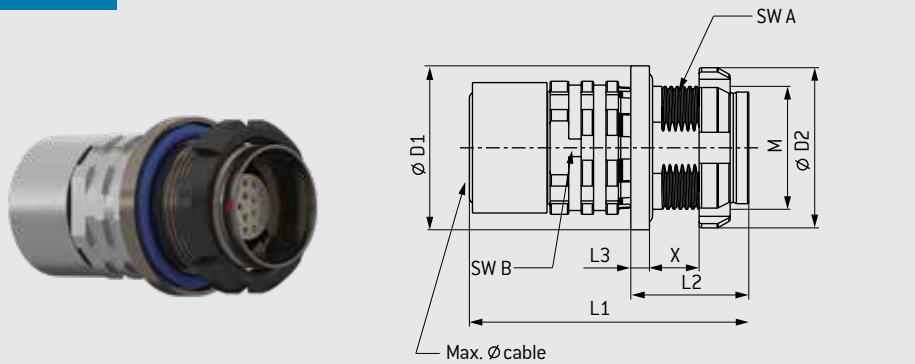

Size	L1	L2 ¹	L3	X max.	D1	D2	SW A	SW B	M	MAX Ø CABLE	Panel cut-out	
											SW	Ø
00	21	1.5	8	4	9.9	10	6.5	8	7 x 0.5	5	6.6	7.1
0	22.5	1.5	8	4	13.2	12.9	9	10	10 x 0.5	7	9.1	10.1
1	26.5	1.5	8	4	15.3	14.9	11.5	12	12 x 0.5	8.5	11.6	12.1
1.5	30.5	1.5	8	4	18.5	17.9	13	14	14 x 0.5	10.5	13.1	14.1

CONTACT CONFIGURATIONS

Shell size	Part number	Layout	Number of contacts	Max. current ²	Max. wire size	Suitable for
				Single contact load	Soldercup	
00	G6CW*M-P02WCE0-0000		02	3 A	2 x AWG 24 (Power)	Power
	G6CW*M-P04WBC0-0000		04	1 A	4 x AWG 28	Signal
	G6CW*M-PU4WBM0-0000		04	1 A	2 x AWG 28 (Signal Lines)	USB® 2.0 ¹
				3A	2 x AWG 24 (Power)	
0	G6CW*M-P07WBC0-0000		07	1 A	7 x AWG 28	Signal
	G60W*M-P09WMM0-0000		09	1 A	3 x AWG 28 (Signal Lines)	USB® 2.0 ¹ + Power
				5A	6 x AWG 22 (Power)	
	G60W*M-P12WMM0-0000		12	1 A	10 x AWG 28 (Signal Lines)	USB® 3.1 Gen 1 ¹ + Power
				5 A	2 x AWG 22 (Power)	
	G60W*M-P16WBC0-0000		16	1 A	16 x AWG 28	Signal
1	G61W*M-P27WBC0-0000		27	1 A	27 x AWG 28	Signal
1.5	G6AW*M-P40WBC0-0000		40	1 A	40 x AWG 28	Signal


Notes:
Substitute “*” for desired keying/color-coding option: A, B, C or D (see key to right)
Consult factory for availability.

All connectors meet or exceed 750V AC test / 250V AC operational voltage when tested according to SAE 13441.
Maximum operating voltage at sea level up to 2000m acc. to SAE 13441.
For various application the safety requirement regarding the operating voltage is even more severe. This must be evaluated during the time of equipment engineering
Consult factory for additional information and options.


A	BROWN
B	RED
C	BLUE
D	GREEN

¹Concerning data transfer protocols please note page 2

FACTORY-TERMINATED FLEX ASSEMBLIES

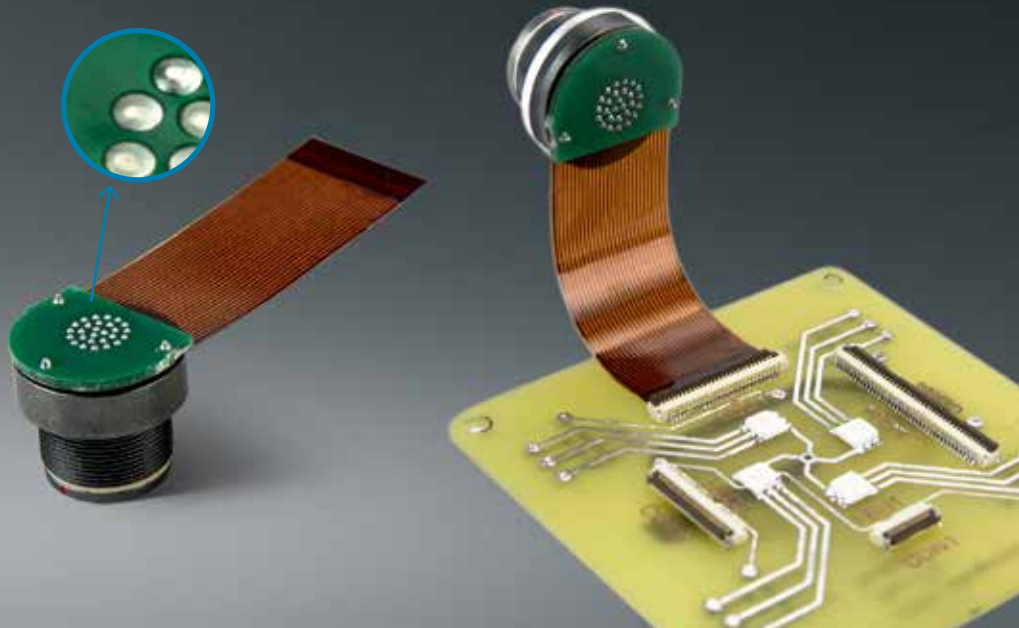

DIMENSIONS AND DETAILS

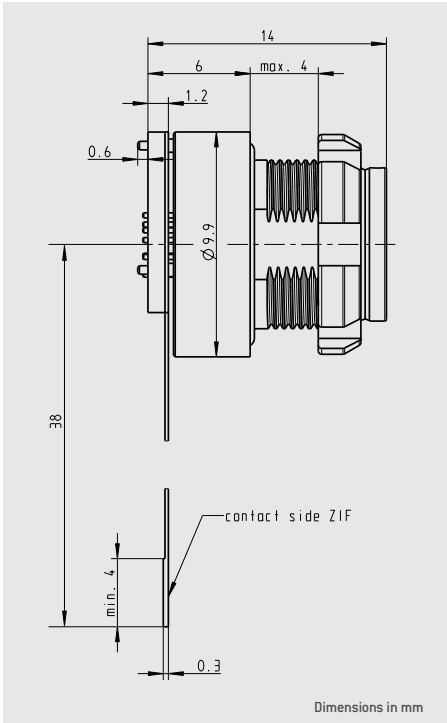


Part number	AMC High Density Connector (Included)	Number of contacts	Connector Shell Size	Connector Keying
C00.71C.100.040.001	GKCWAM-P04UB00-000L	04	00	A
C00.71C.100.070.001	GKCWAM-P07UB00-000L	07	00	A
C00.701.100.160.001	GKOWAM-P16UB00-000L	16	0	A
C00.716.100.400.001	GKAWAM-P40UB00-000L	40	1.5	A
C00.711.100.270.001	GK1WAM-P27UB00-000L	27	1	A

Notes:
Additional lengths, configurations and keyings available on request.
Contact ODU for more information.


Flex is designed to work with suitable ZIF connector (not supplied).
Contact ODU for more information.

PROTECTIVE CAPS


FOR RECEPTACLE GK AND IN-LINE RECEPTACLE

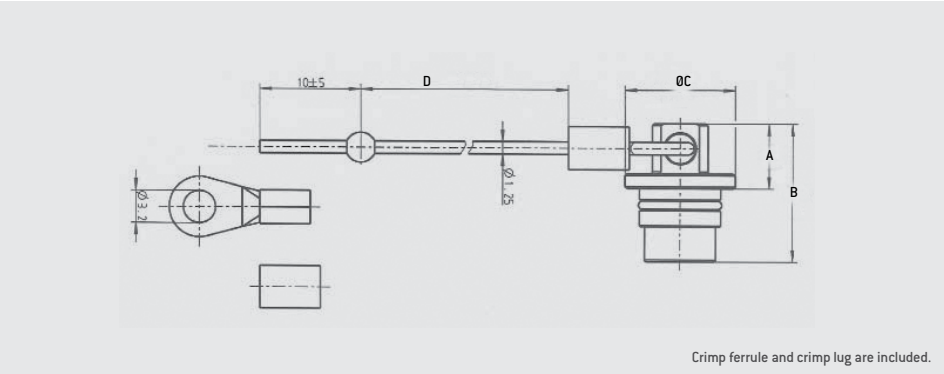


Size	Part Number	Dimensions in mm			
		A	B	C	D
00	713.650.097.002.359	6.5	13.8	8.5	200
0	700.650.097.002.359	6.5	13.8	10.9	200
1	701.650.097.002.359	6.5	13.8	13.5	200
1.5	715.650.097.002.359	6.5	13.8	14.9	200

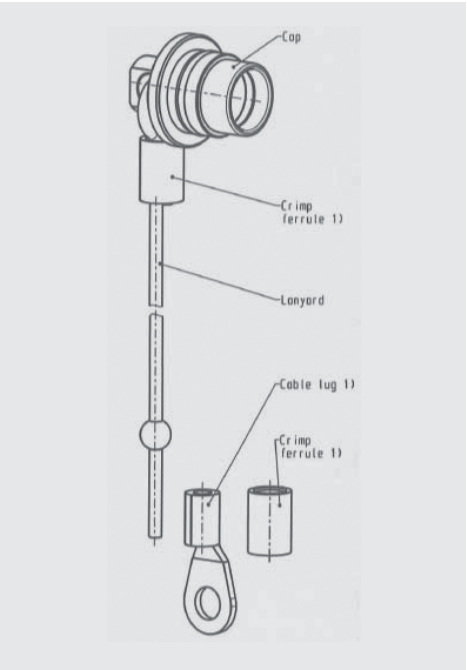

FOR BREAK-AWAY PLUG

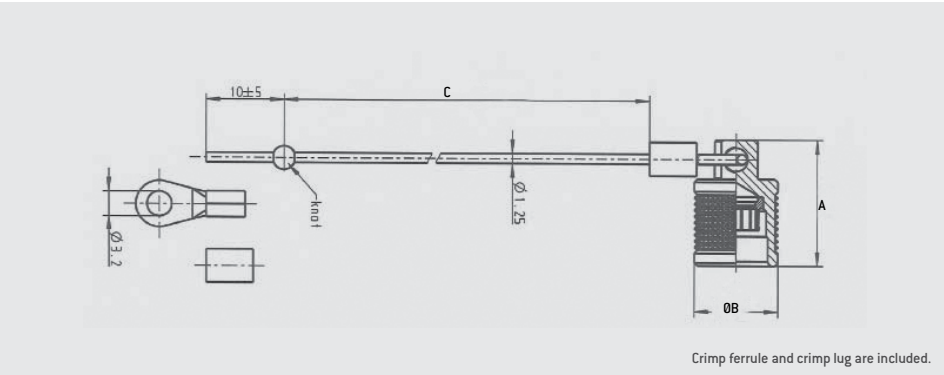

Size	Part Number	Dimensions in mm		
		A	B	C
00	713.650.097.001.359	16.2	8.6	200
0	700.650.097.001.359	16.2	10.7	200
1	701.650.097.001.359	16.2	13.5	200
1.5	715.650.097.001.359	16.2	14.8	200

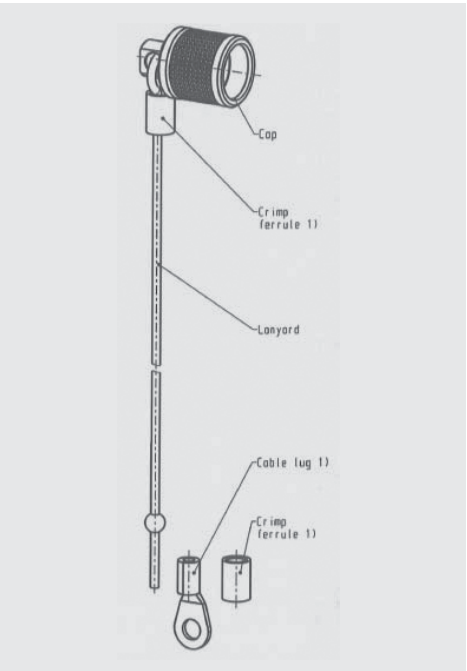


MATERIALS

Part	Material
Cap	Brass / ruthenium coated nickel
Lanyard	Aramid / black
Crimp ferrule, cable lug	Brass, copper / zinc-nickel, black
Shrinktube	FPO (RNF -100) / black

ENVIRONMENTAL AND ELECTRICAL CHARACTERISTICS

Type	Performance
Tightness	IP68 (20 m)


HIGH SPEED DATA TRANSMISSION AT A GLANCE

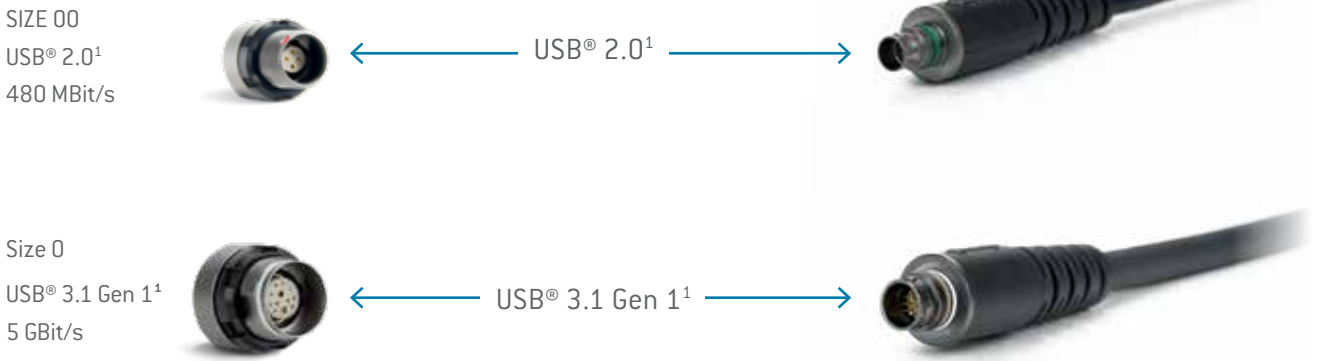


- USB® 3.1 Gen 1¹ data transfer rates up to 5 Gbit/s
- USB® 2.0¹ data transfer rates up to 480 Mbit/s
- Ethernet¹ CAT5¹ data transfer rates up to 1 Gbit/s
- HDMI® 2.0¹ data transfer rates up to 8.16 Gbit/s

CHARACTERISTIC IMPEDANCE

ODU AMC® High-Density connector with 3 m cable in total and 2x USB® 3.1 Gen 1¹ Type A connector

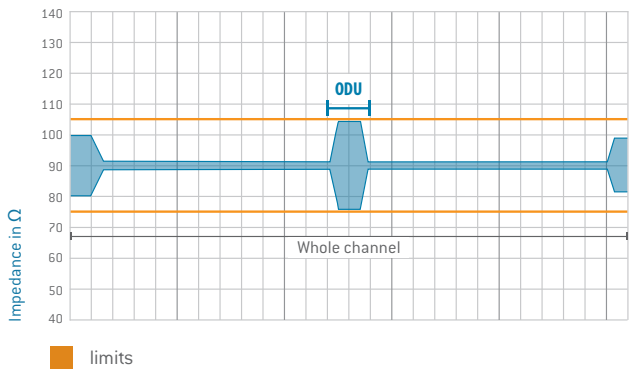

NEAR-END CROSSTALK

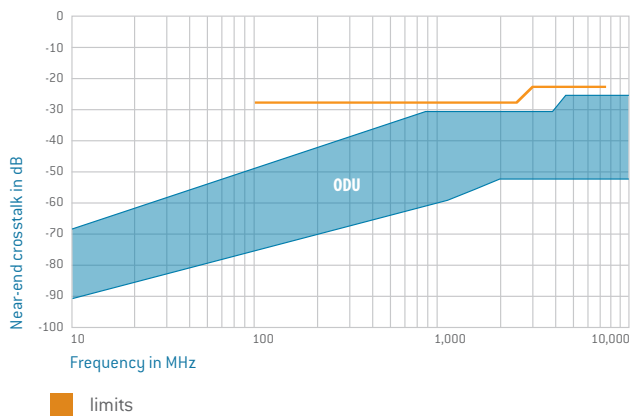

SPECIAL APPLICATIONS NEED SPECIAL SYSTEM SOLUTIONS

Every connector also needs its cable. In addition to high quality connectors, ODU offers a comprehensive assembly service from one supplier which translates into innovative options for assembly and extrusion for the cable bend relief, as well as connections to flex and PCB solutions on the device side.



ADVANCED CONNECTOR SOLUTION APPLICABILITY

ODU ADVANCED PRODUCT PORTFOLIO:



ODU AMC® Break-Away



ODU AMC® Push-Pull



ODU AMC® High-Density



ODU AMC® Easy-Clean



PERSONAL COMPUTER

- Small and light



GROUP VOICE AND DATA RADIO

- Excellent shielding and data transmission up to 10 GBit



RIGHT-ANGLED CONNECTOR

- Compact design



NAVIGATION MODULE

- Easy-Clean version



SOLDIER CONTROL UNIT

- Cable-to-cable connection



VEHICLE ADAPTION

- Robust and reliable



ODU MINI-SNAP®



ODU MINI-SNAP® Series F



ODU MINI-SNAP® Series K




ODU MINI-SNAP® Series B Super-Shorty

ADVANCED CUSTOMER BENEFITS

- Close cooperation with our customers to find the optimal solution
- ODU handles the complete processing, from procuring the cable and assembly up to individual potting or overmolding
- 100% inspection
- Connectors can be assembled by the customer – ODU expertise available for assistance





A PERFECT ALLIANCE.

ODU GROUP WORLDWIDE



ODU USA

ODU-USA, Inc.

300 Camarillo Ranch Road, Suite A, Camarillo, CA 93012, United States of America
Phone: +1 805 484 - 0540, Fax: +1 805 484 - 7458, E-mail: sales@odu-usa.com

HEADQUARTERS

ODU GmbH & Co. KG

Pregelstraße 11
84453 Mühldorf a. Inn, Germany
Phone: +49 8631 6156-0
Fax: +49 8631 6156-49
E-mail: zentral@odu.de
www.odu.de

PRODUCTION AND LOGISTICS SITES

Germany Otto Dunkel GmbH
China ODU (Shanghai) Connectors Manufacturing Co.Ltd
Mexico ODU Mexico Manufacturing S.R.L. de C.V.
Romania ODU Romania Manufacturing S.R.L.
USA ODU-USA, Inc.
ODU North American Logistics

FURTHER SALES SUBSIDIARIES

ODU Denmark ApS

Phone: +45 2233 5335
E-mail: sales@odu-denmark.dk
www.odu-denmark.dk

ODU France SARL

Phone: +33 1 3935-4690
E-mail: odu@odu.fr
www.odu.fr

ODU Italia S.R.L.

Phone: +39 331 8708847
E-mail: sales@odu-italia.it
www.odu-italia.it

ODU Japan K.K.

Phone: +81 3 6441 3210
E-mail: sales@odu.co.jp
www.odu.co.jp

ODU Scandinavia AB

Phone: +46 176 18262
E-mail: sales@odu.se
www.odu.se

ODU (Shanghai)

International Trading Co., Ltd.
Phone: +86 21 58347828-0
E-mail: oduchina@odu.com.cn
www.odu.com.cn

ODU-UK Ltd.

Phone: +44 330 002 0640
E-mail: sales@odu-uk.co.uk
www.odu-uk.co.uk

Further information and specialized representatives can be found at:
www.odu-usa.com/contact



Learn more about ODU.