
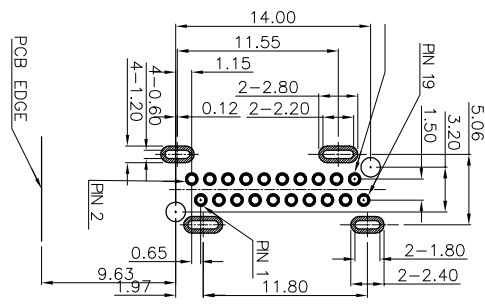
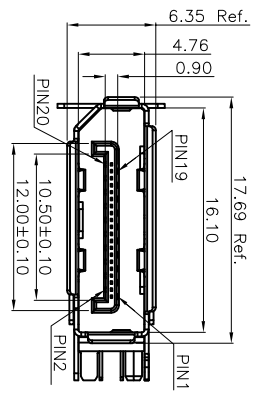


NOTES:


1. HOUSING: LCP (UL94V-0), BLACK.
2. TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS, NICKEL PLATED OVERALL.
3. SHELL: STAINLESS STEEL, T=0.30mm, NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING: 0.5A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE: 100M Ω U+2126 MIN. AT 500V DC.
4. CONTACT RESISTANCE: 30m Ω U+2126 MAX.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. DURABILITY: 10000 CYCLES.
7. MATING FORCE: 4.5kgf MAX.
8. UNMATING FORCE: 1.0kgf MIN.

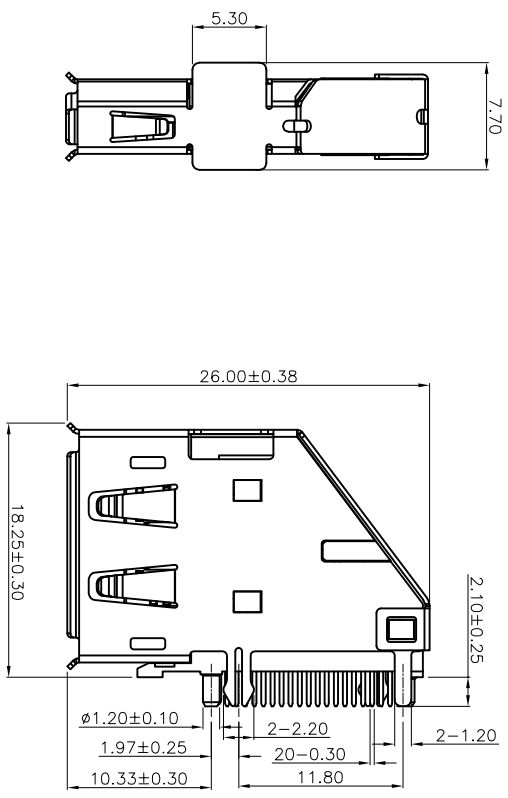

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

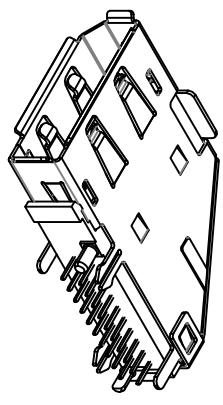

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)	DISPLAYPORT, FEMALE侧插	版本 (REV)		比例 (SCALE) 1:1
料号 (PART NO)	DP-AF-CC-01	设计 (DESIGN)		未注公差 TOLERANCE UNNOTED X.X ± 0.38 X.XX ± 0.26 X.XXX ± 0.13 X.X ⁺ $\pm 2^{\circ}$
型号 (MODEL NO)		审核 (CHECKED)		
		核准 (APPROVED)		