

© COPYRIGHT 1998 BY SPC TECHNOLOGY.
ALL RIGHTS RESERVED. NO PORTION OF
THIS PUBLICATION, WHETHER IN WHOLE
OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT
OF SPC TECHNOLOGY.

REVISIONS

DOC. NO. SPC-F004, Total Pages: 2
Effective: 7/15/97, DCP No: 229 Supersedes DCP No: 103

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
162	A	RELEASED	J.W.M.	1/19/98	J.C.	2/4/98	B.B.	2/5/98

Material:

Housing: Thermoplastic

Terminal: Copper Alloy

Characteristics:

Rating: 10A 250V AC

Insulation Resistance: Over 100 Ohm 500VDC



Dielectric Strength: 200VAC One Minute

Mounting Screw Torques: 5in-Lbs Max




Fuse: 5ø x 20mm 250VAC 6.3A Max

Approvals:

UL, CSA, VDE, SEMKO, DEMKO,
NEMKO, SETI, CB and SEV, FIMKO

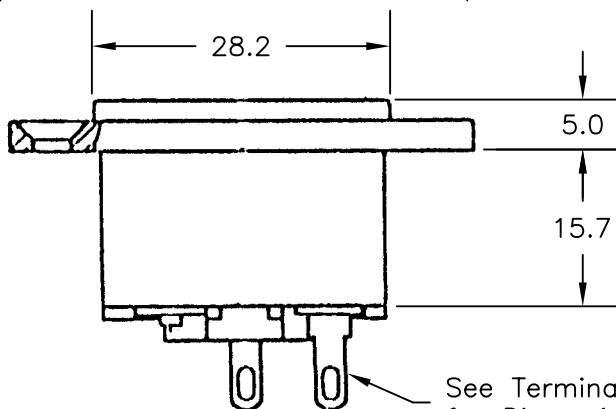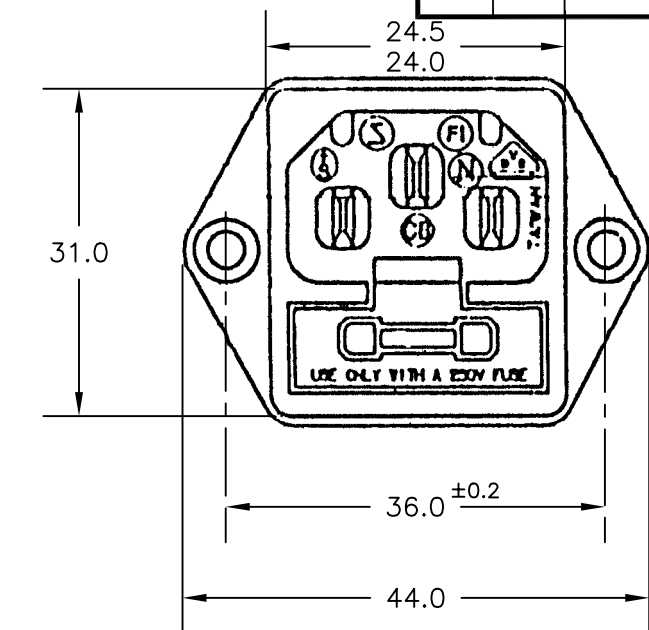

See Terminal Detail
for Dimensions

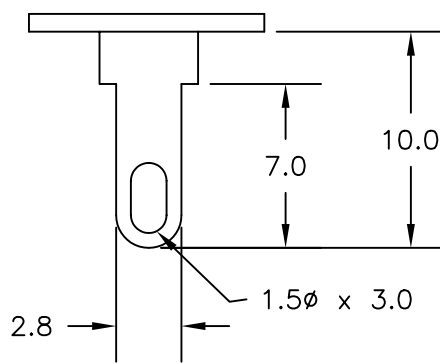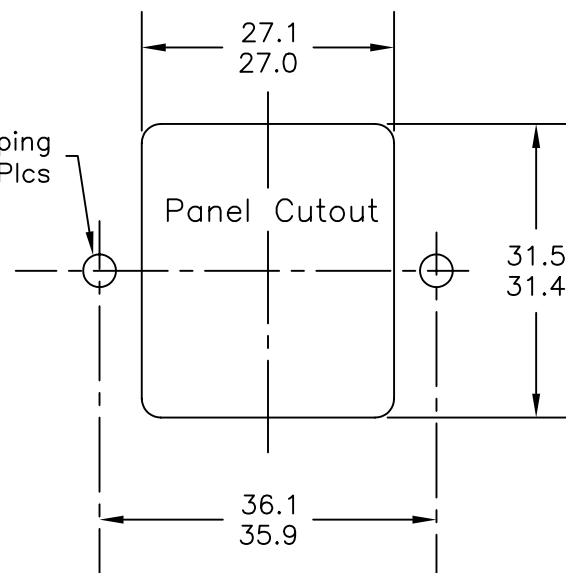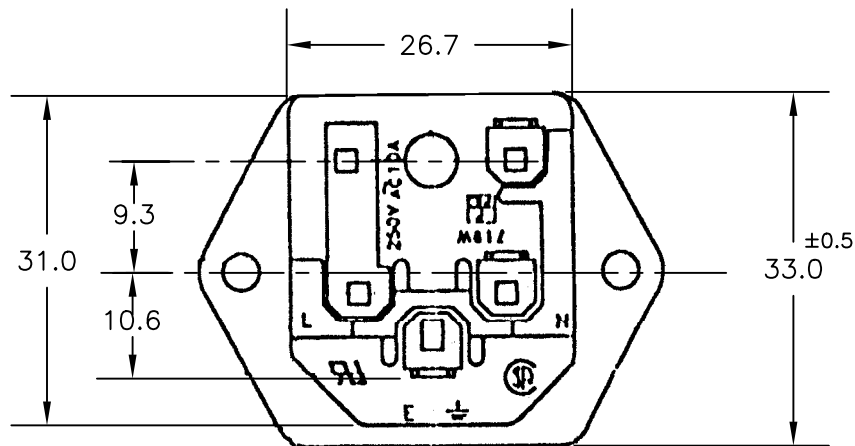

Terminal Detail

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION
AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE
BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE
INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

Unless Otherwise Specified:
Dimensions are shown for
reference only!

DRAWN BY:	DATE:
Jeff McVicker	1/19/98
CHECKED BY:	DATE:
JOHN COLE	2/4/98
APPROVED BY:	DATE:
BRETT BRAATZ	2/5/98

DRAWING TITLE:

Power Inlet with Fuesholder

SIZE DWG. NO.

A

2147

ELECTRONIC FILE

92N4150.dwg

REV

A

SCALE: NTS

U.O.M.: Millimeters

SHEET: 1 OF 1