
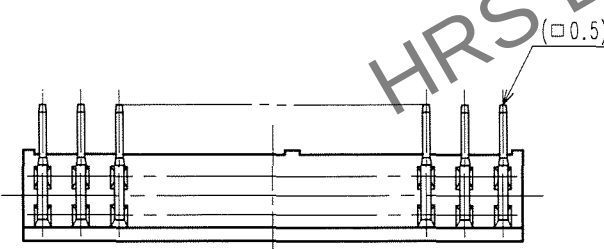
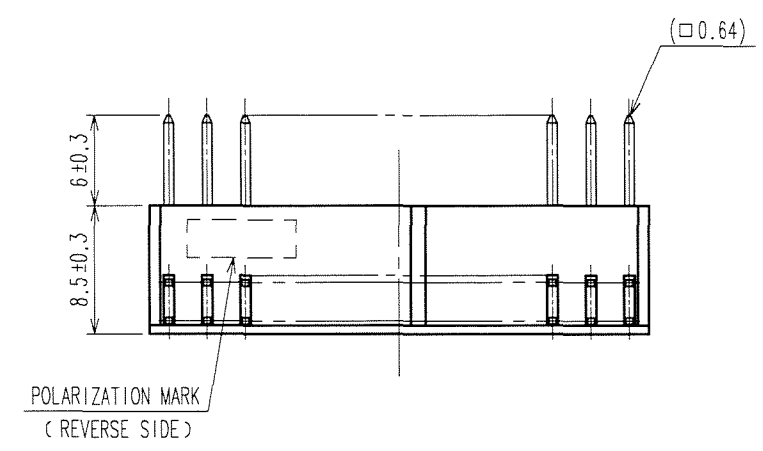



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

A
B
C
D
E
F

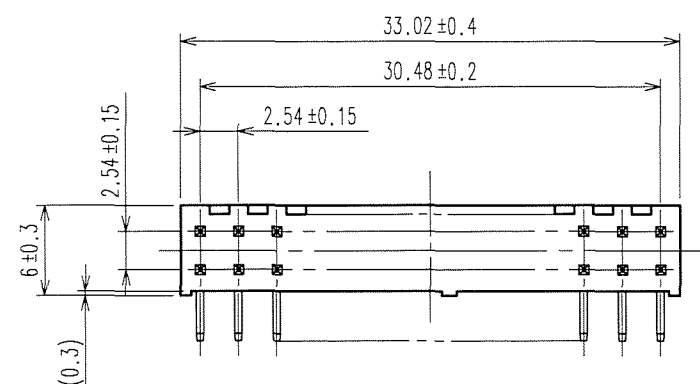


RECOMMENDED PC BOARD HOLE PATTERN

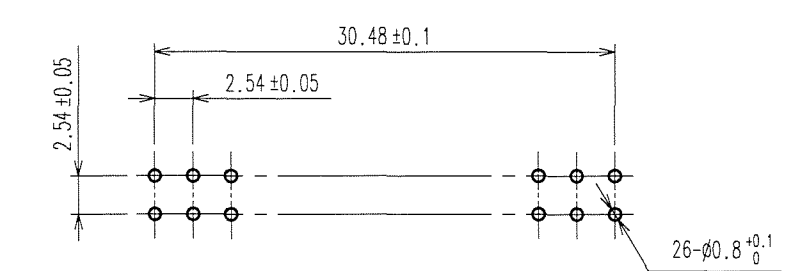

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

1	PBT	BLACK	UL94V-0	2,3	BRASS	CONTACT AREA : GOLD 0.2μ m min			
						DIP AREA : TIN-PLATING 2μ m min			
						UNDER PLATING : NICKEL 2.5μ m min			
NO.	MATERIAL	FINISH, REMARKS			NO.	MATERIAL	FINISH, REMARKS		
CODE NO.(OLD) CL				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
				K.NAKAMURA	K.NAKAMURA	H. Ozawa	H. Okawa		
				07.02.01	07.02.01	07.02.01	07.02.01	. .	
		DRAWING NO.			PART NO.				
SCALE 2 : 1		EDC3-018136-21			A1-26PA-2.54DS(71)				
UNITS mm		HRS HIROSE ELECTRIC CO., LTD			CODE NO. CL619-0009-9-71				1/1

A
B
C
D
E
F