

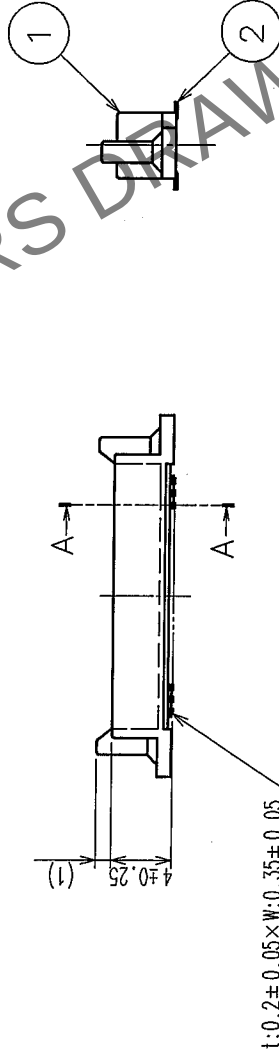



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

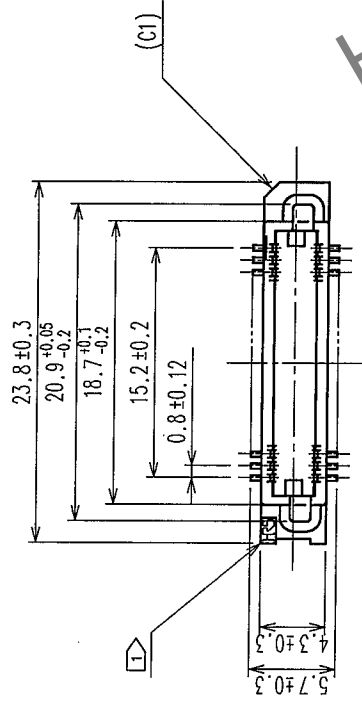

RECOMMENDED P.C.B. LAND PATTERN
(MOUNT SIDE)

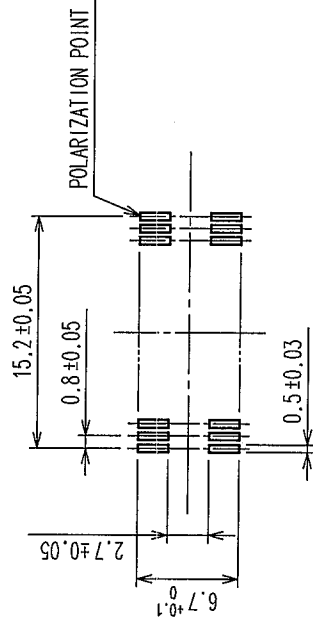

A-A (10:1)

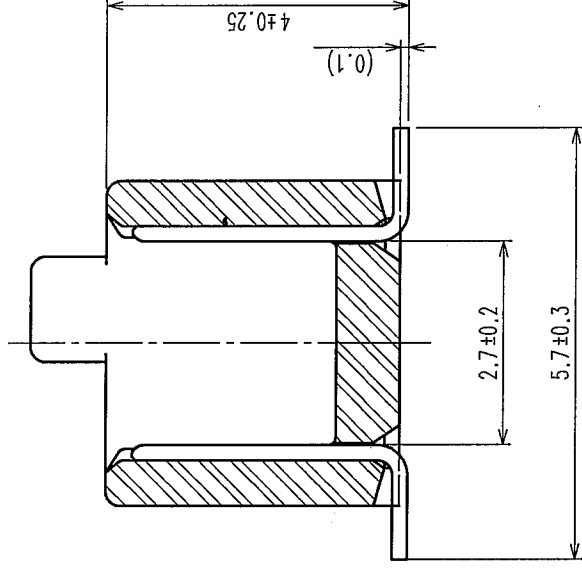

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
4 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5μm min.			
NO.	MATERIAL	FINISH, REMARKS	DRAWN	NO.	MATERIAL	FINISH, REMARKS			
CODE NO. (OLD)						DESIGNED	CHECKED	APPROVED	RELEASED
						Y. AOYAGI	X. Ogawa	H. Okawa	
						'05.09.16	'05.09.26	'05.09.27	
DRAWING NO.						PART NO.			
EDC3-071319-22						FX6A-40P-0.8SV(92)			
SCALE						CODE NO.			
2 : 1						CL576-0203-8-92			
UNITS						1/2			
mm									

HRS

HIROSE ELECTRIC CO., LTD

