

PRODUCT NUMBER
20020731-XXXXXXLF

20020731-

PITCH

Y: 15.0 mm

POLES

02: 2 POLES
03: 3 POLES
04: 4 POLES

10: 10 POLES

LF : DENOTED RoHS COMPATIBLE

1 : STANDARD PRODUCT
W/ BOX PACKING

SCREW CODE

CODE	SCREW TYPE	AVAILABILITY
A	-/+	ON REQUEST ONLY
B	-	STANDARD

PROPERTY TABLE			
FCI SERIES NAME		40-1500	
PITCH (mm)		15.0	
VOLTAGE RATING (VAC)		600	
CURRENT RATING (A)		125	
APPLICABLE WIRE RANGE (AWG)		1-WIRE	2~20
		2-WIRE	10
WIRE CROSS SECTION (mm ²)		SOLID	1-WIRE 35
			2-WIRE 6.0
		STRANDED	1-WIRE 25
			2-WIRE 6.0
OPENING CONTACT HOUSING(mm ²)		8.1x8.4	
WIRE STRIP LENGTH(mm)		15~18	
TORQUE +/-10% (N-M/Lb-in)		4.12/36.5	
SCREW		M5.0x0.8	
WITHSTANDING VOLTAGE (kV)		2.2	
OPERATING TEMP. (°C)		-40~+115	
SOLDERING TEMP. (°C)		250±10 (5 sec.)	
POLES AVAILABLE		02~10	
SAFETY CERTIFICATE			

HOUSING CODE

CODE	COLOR	AVAILABILITY
1	GREEN(RAL 6018/T)	STANDARD
2	BLACK	ON REQUEST ONLY
3	GREY(RAL 7004/P)	ON REQUEST ONLY
4	BLUE(RAL 5015/A)	ON REQUEST ONLY

NOTES:

1.MATERIAL:

1-1 HOUSING: THERMOPLASTIC RESIN, UL94V-0 RATED.

1-2 SCREW: STEEL, ZINC PLATED.

1-3 CLAMP: COPPER ALLOY, NICKEL PLATED.

1-1 TERMINAL: COPPER ALLOY TIN PLATED.

2. PRODUCT SPECIFICATION REFER TO FCI GS-12-625.

3. PRODUCT PACKING SPECIFICATION REFER TO FCI GS-14-1394.


4. FCI, SAFETY CERTIFICATE LOGO AND SERIES NAME TO BE SHOWN ON PRODUCT SURFACE.

5. THE PRODUCTS WHERE THE PART NUMBER END IN "LF" MEET THE EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

6. RECOMMENDED SOLDERING PROCESS BY WAVE SOLDER.


mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
A	T10-0138	WL	083110	angles	X.±0.5	MM	TERMINAL BLOCK FIXED POWER PLUG, MIDDLE CONTACT
B	T10-0172	WL	102010	±0.1	X.X±0.3	[INCH]	
C	T-005202	WL	081911	X*±1*	X.XX±0.1	scale	
D	T-010814	LS	031912	dr	WENDY CHEN	082310	
				enr	JASON HSU	082310	dwg no
				chr	GARY HSIEH	082310	sheet 1 of 2
				appd	JOSEPH HSIA	082310	size
sheet	revision	D	D				20020731
index	sheet	1	2				A4
							type
							CUSTOMER Drawing

PRODUCT NUMBER	SERIES NAME	PITCH
20020731-YXXXXXXLF	40-1500	15.0 mm



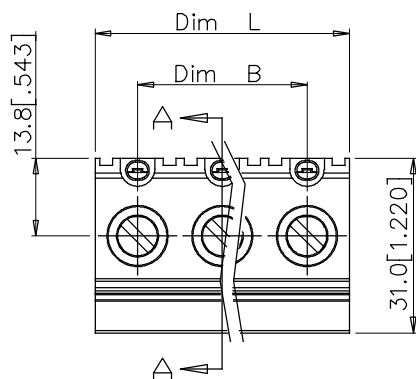


N = Number of poles
 Dim L = $N \times 15.0 [.591]$
 Dim B = $(N-1) \times 15.0 [.591]$

Poles	Tolerance
2-3p	$\pm 0.30 [.012]$
4-5p	$\pm 0.50 [.020]$
6-10p	$\pm 0.80 [.031]$

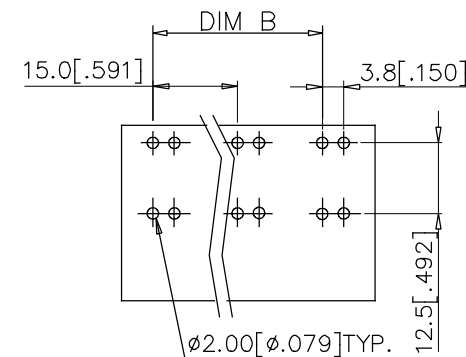

Recommended P.C.B. Layout

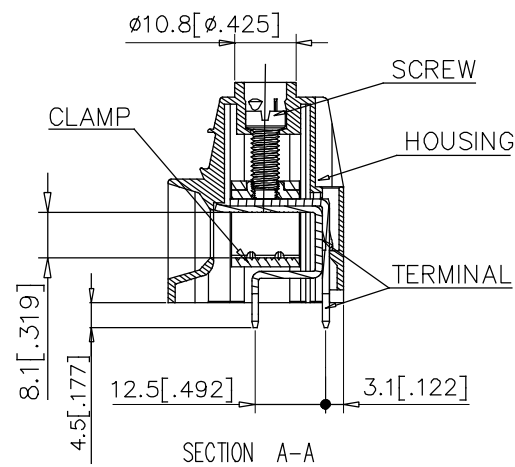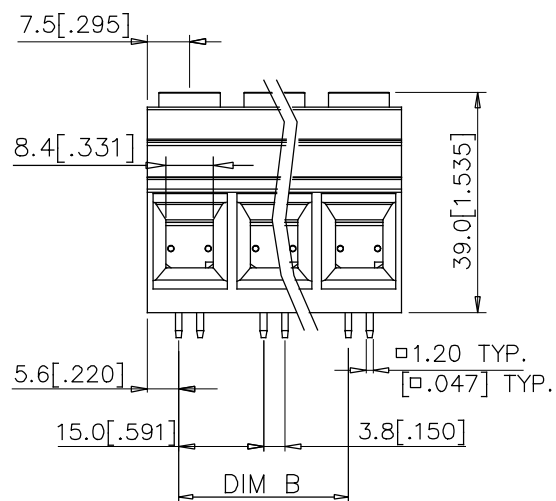

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
D				angles	$X \pm 0.5$	 MM [INCH]	TERMINAL BLOCK FIXED POWER PLUG, MIDDLE CONTACT			
				$X' \pm 1'$	$X.X \pm 0.3$					
				dr	WENDY CHEN	082310		dwg no		sheet 2 of 2
				enr	JASON HSU	082310		20020731		A4
				chr	GARY HSIEH	082310		type		
				appd	JOSEPH HSIA	082310				
sheet index	revision	sheet								