

1418664

https://www.phoenixcontact.com/us/products/1418664

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sample set, 8-position, Socket, straight, M8, coding: A, PCB mounting, SMD, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239219

Commercial data

Item number	1418664
Packing unit	5 pc
Minimum order quantity	5 pc
Product key	ABQXAA
GTIN	4055626163086
Weight per piece (including packing)	6.27 g
Weight per piece (excluding packing)	6.27 g
Country of origin	DE



1418664

https://www.phoenixcontact.com/us/products/1418664

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

Product properties

Product type	Contact insert
Number of positions	8
Seal present	yes
Coding	A
Thread type	M8

Insulation characteristics

Overvoltage category	III

Electrical properties

Contact resistance	≤ 3 mΩ
Insulation resistance	≤ 100 MΩ
Nominal voltage U _N	30 V
Nominal current I _N	1.5 A

Connection data

Connection method	SMD
Connection metriod	SMD

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M8
Coding	A

Mechanical properties

Mechanical data



1418664

Mounting

Mounting type

https://www.phoenixcontact.com/us/products/1418664

Insertion/withdrawal cycles vironmental and real-life conditions	> 100
Ambient conditions	
Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection (not plugged in)	IP65 (not plugged in, by means of additional O-ring seal with device)
Degree of protection	IP67
Ambient temperature (operation)	-25 °C 105 °C (Plug / socket)
	-40 °C 105 °C (without mechanical actuation)
andards and regulations	
Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104

PCB mounting




https://www.phoenixcontact.com/us/products/1418664



Drawings

Schematic diagram

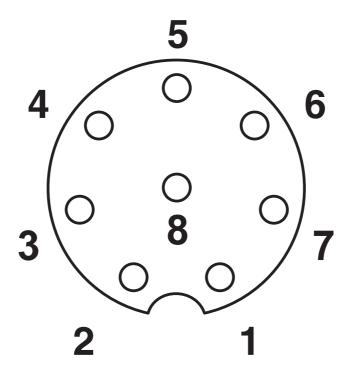

Connector pin assignment of M8 socket, 8-pos., view of socket side



1418664

https://www.phoenixcontact.com/us/products/1418664

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1418664

c 911 us	cULus Recogniz Approval ID: E22147	zed 4-20160506			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		30 V	1.5 A	-	-



1418664

https://www.phoenixcontact.com/us/products/1418664

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223
ETIM	
ETIM 9.0	EC003557
UNSPSC	

39121400



1418664

https://www.phoenixcontact.com/us/products/1418664

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	baa63768-c70f-451f-97eb-34d3bd22aad0



1418664

https://www.phoenixcontact.com/us/products/1418664

Accessories

SACC-BP-F-M8/M12 SMD - Housing screw connection

1412506

https://www.phoenixcontact.com/us/products/1412506



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239003

SACC-FP-F-M8/M10 SMD - Housing screw connection

1412504

https://www.phoenixcontact.com/us/products/1412504



M8 female connector, front mounting SMD with M10 screw fastening



1418664

https://www.phoenixcontact.com/us/products/1418664

SACC-FP-F-M8/PRESS SMD - Housing screw connection

1412501

https://www.phoenixcontact.com/us/products/1412501

M8 socket, press-in mounting



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com