




Connectors > PCB Connectors > PCB Headers & Receptacles

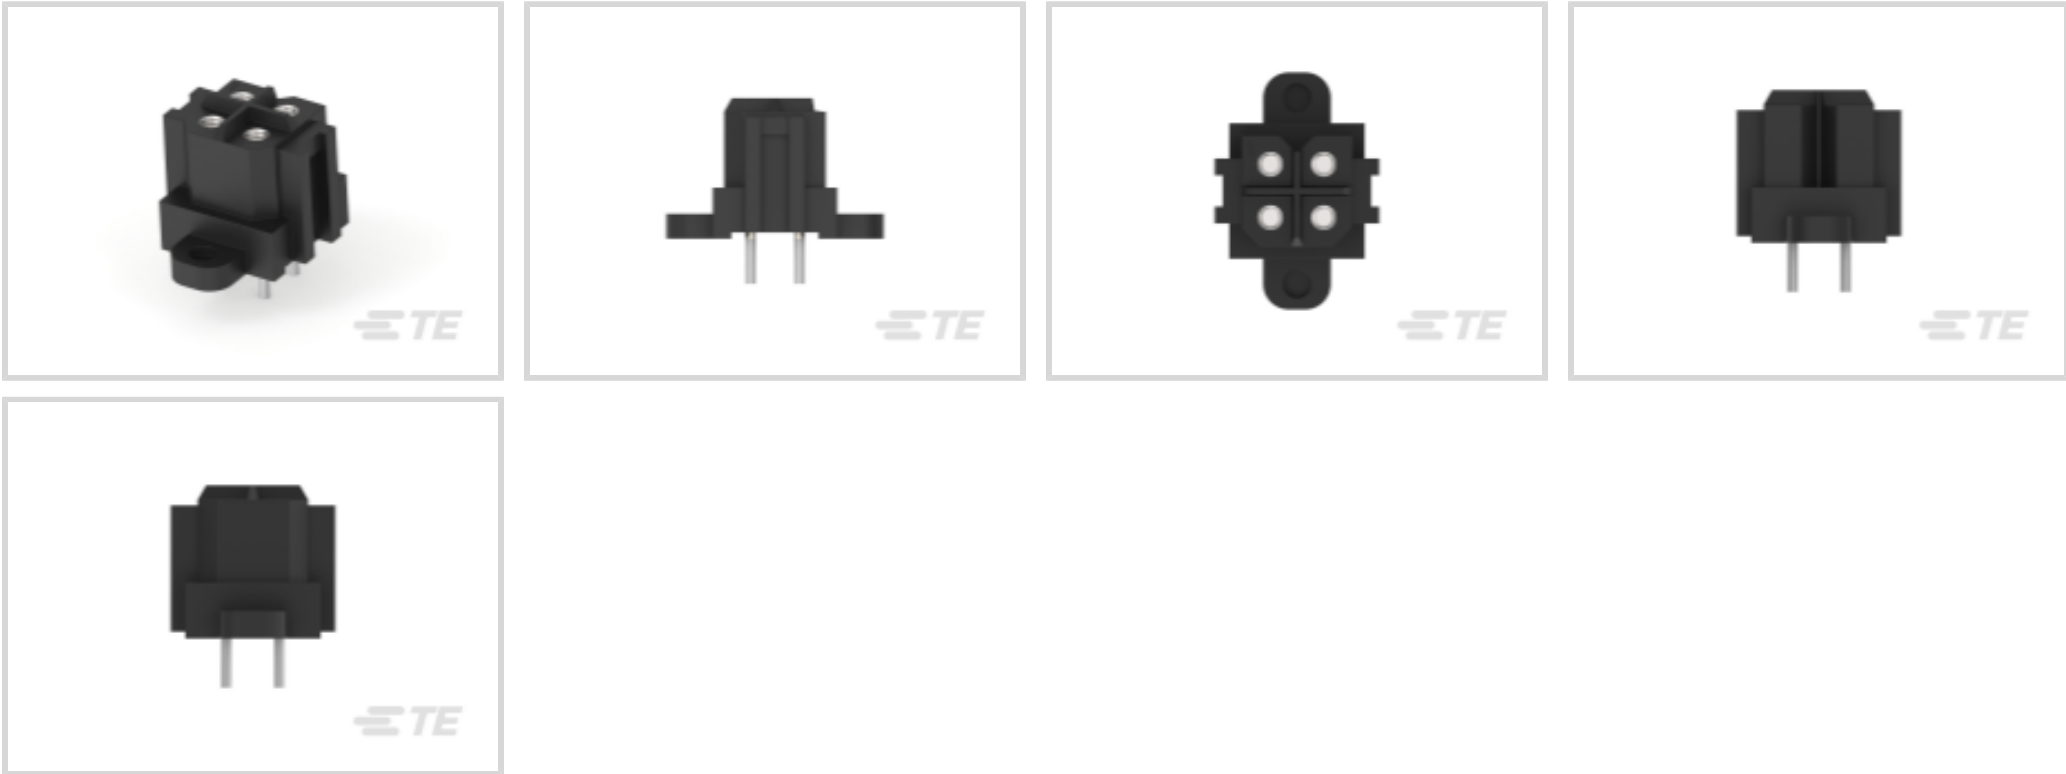

PCB Connector Assembly Type: **PCB Mount Header**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Number of Rows: **2**

Centerline (Pitch): **5 mm [.197 in]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Columns	2
Number of Loaded Positions	4
Connector Contact Load Condition	Fully Loaded
Number of Positions	4
Number of Rows	2
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features



Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Thickness	3.81 μm[150 μin]
Contact Layout	Matrix
Mating Pin Diameter	1.75 mm[.069 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Type	Socket
Contact Current Rating (Max)	7.5 A

Termination Features

Termination Post & Tail Diameter	.99 mm[.039 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Screw Mount
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With

Housing Features

Housing Material	PA 66
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Connector Length	10.36 mm[.408 in]
Connector Height	14.35 mm[.565 in]
Connector Width	10.36 mm[.408 in]



Row-to-Row Spacing	5 mm[.197 in]
--------------------	---------------

Usage Conditions

Operating Temperature Range	-55 – 130 °C[-67 – 266 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	126
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 207016-1
4 POS SQ GRID METRIMATE RCPT

Also in the Series | AMP Metrimate

Connector Caps & Covers(4)

Connector Hardware(4)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(80)

Rectangular Connector Housings(34)

Rectangular Contact Inserts(4)

Standard Rectangular Connectors(2)

Customers Also Bought

TE Part #3-338314-2
15POS.HD20 REC.ASSY

TE Part #5525DSO-DB001DS
1PSID DIGITAL PRESSURE SENSOR


TE Part #207530-9
SKT HDR ASSY,18P,MMATE LF

TE Part #207526-7
SKT HDR ASSY,9 POSN,METRIMATE





TE Part #3-1879208-7
CPF 0402 330R 0.1% 25PPM 1K RL

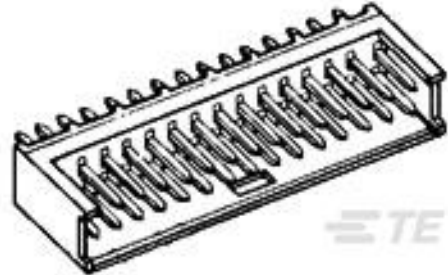

TE Part #280385-2
2X8P AMPMODU II SHRD HDR,ST,0.38 AU




TE Part #2-1879208-3
CPF 0402 82R 0.1% 25PPM 1K RL



TE Part #1676255-2
RN 0805 221R 0.1% 10PPM 1KRL



TE Part #207528-9
SKT HDR ASSY,12P,MMATE LF

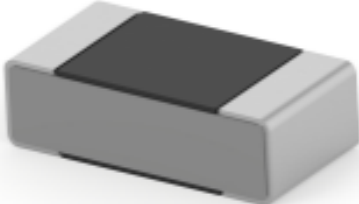

TE Part #3-1879129-0
RN 0402 1K5 0.1% 10PPM 5K RL

Documents

Product Drawings

SKT HDR ASSY,4P,MMATE LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_207496-9_Y.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_207496-9_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_207496-9_Y.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_207496-9_L.2d_dxf.zip

English

Customer View Model

ENG_CVM_207496-9_L.3d_igs.zip

English

Customer View Model

ENG_CVM_207496-9_L.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
METRIMATE_PIN_SOCKET_CATALOG
English

Product Specifications
Product Specification
English

Agency Approvals
CSA Certificate
English