
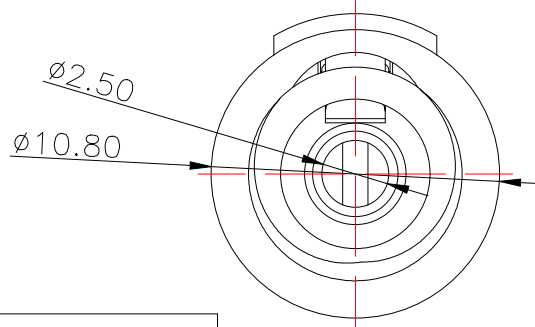
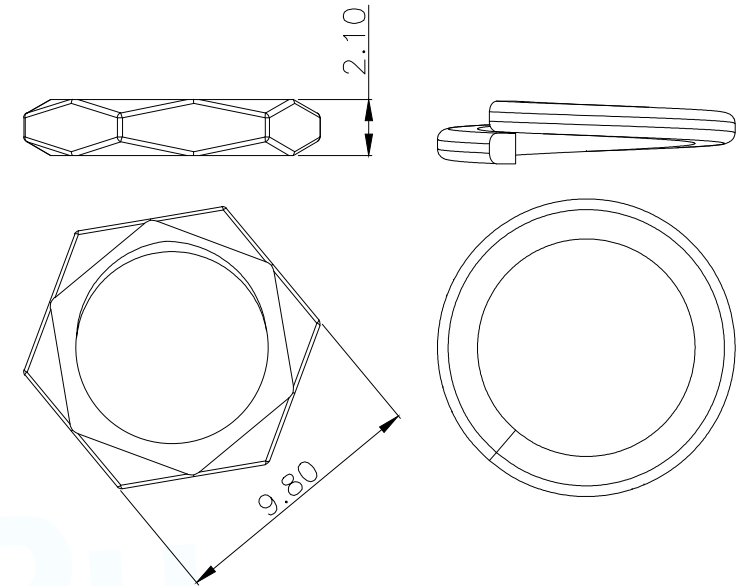
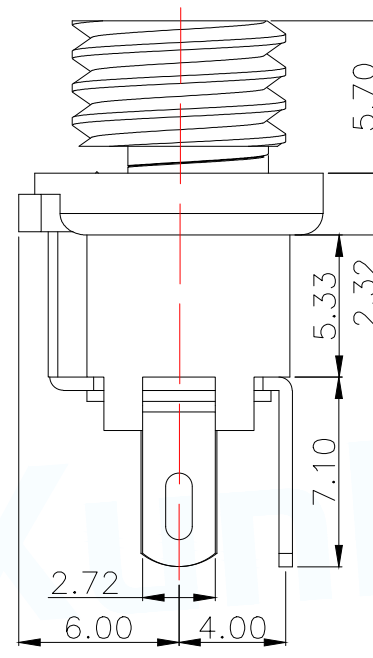
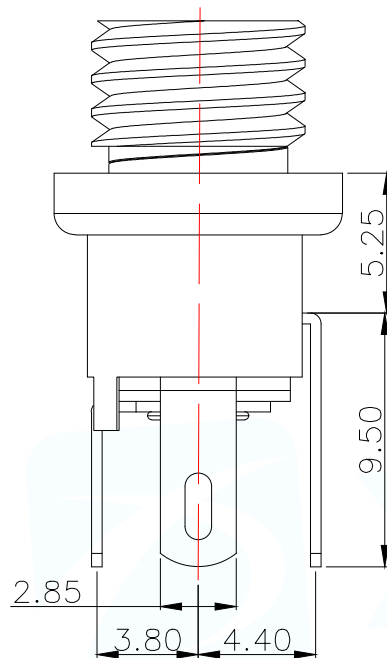
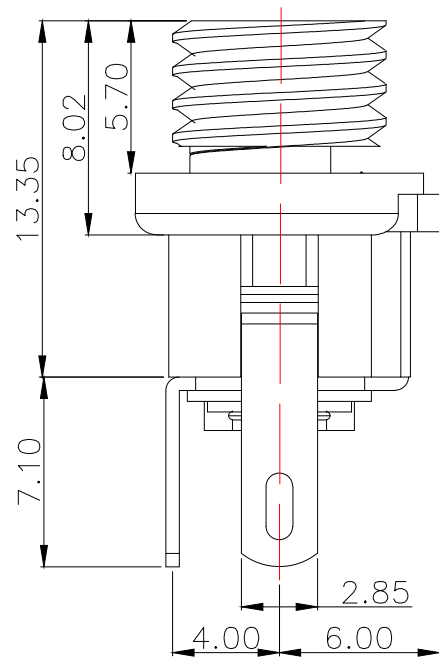


SCHEMATIC

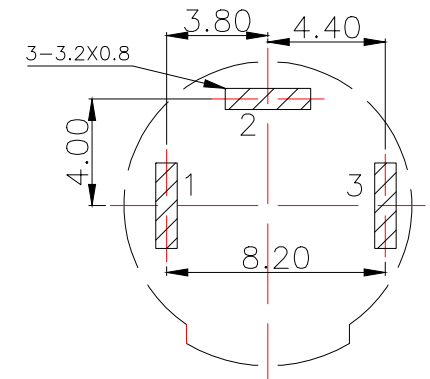

PCB.WELDING DRAWING

Main technical performance	
Rated electrical load	DC 24V 3A
Contact resistance	$\leq 0.03\Omega$
Insulation resistance	$> 100M\Omega$
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20°C~+70°C
service life	5000cycles

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DC SOCKET	
DECIMALS:	ANGLES:	PAR	DC-025M-B250
X.X±0.30	X.*±5°	DWN	
X.XX±0.25	X.X'±1°	CHKD	
X.XXX±0.15		APVD	
CUSTOMER COPY		SCALE N:A	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A