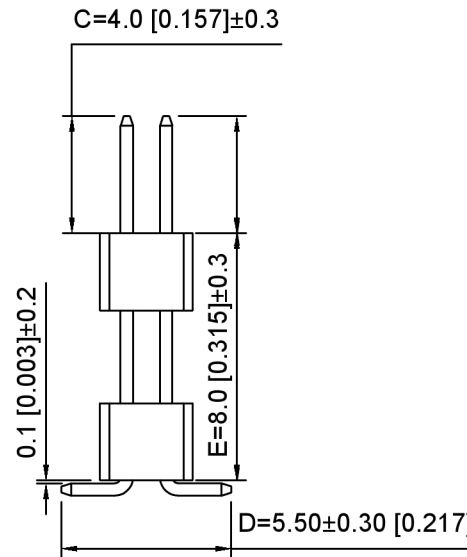
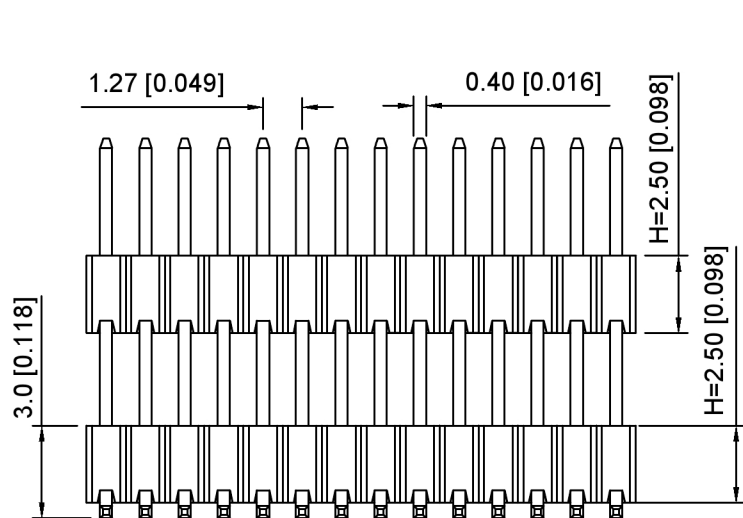


P.C.B LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S

回流焊温度: 260±5℃, 10S

X1322	W	V	S	2xXX	H	C40	D55	E80
①	②	③	④	⑤	⑥	⑦	⑧	⑨

- 1.Series No.
- 2.Category:W-Water
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way S-SMT
- 5.Row No -Pin No:2xXX-2x02P-2x50P
- 6.Plastic height: H=2.5mm
- 7.Pin length: C=4.0mm
- 8.Pin pitch:D=5.5mm
- 9.Pin length:E=8.0mm

X1322WVS-2xXXH-C40D55-E80	PA6T	Brass	1U"Gold	X1321F
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Female

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector		
DWN		VIEW: 	PART NO.: X1322WVS-2xXXH-C40D55-E80		
CHKD		UNIT: mm/in	DWG NO.: X-X1322WVS-2xXXH-C40D55-E80		
APPD		SIZE: A4	WEIGHT	SHEET	REVISION
PRECISION CO.,LIMITED				1/1	A0

XKIB

XKB INDUSTRIAL PRECISION CO.,LIMITED

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5
UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn