
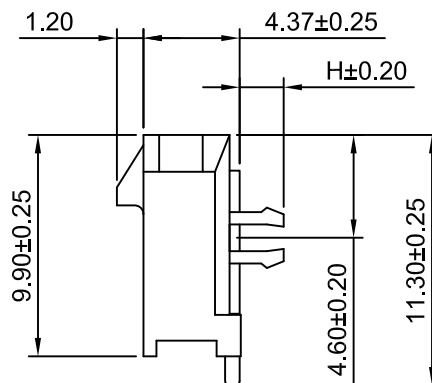
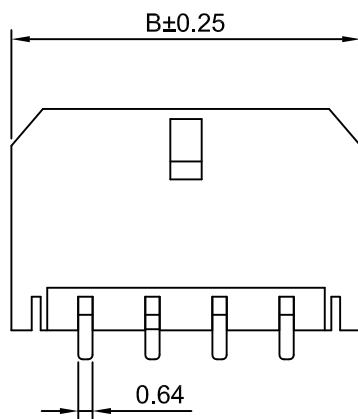
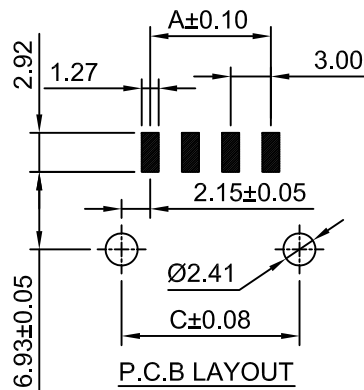


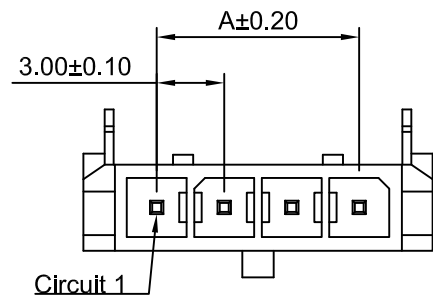

Ordering Information:

C3030WR-S-F-XP - *** - *** - ***
1 2 3 4

1.Part No.

2.Size(H):

(blank):2.00mm

H30:3.00mm

3.Material:

(blank):LCP UL94V-0

GWT:LCP UL94V-0,GWT 750°C

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #18)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.00	9.65	7.30	8P	21.00	27.65	25.30
3P	6.00	12.65	10.30	9P	24.00	30.65	28.30
4P	9.00	15.65	13.30	10P	27.00	33.65	31.30
5P	12.00	18.65	16.30	11P	30.00	36.65	34.30
6P	15.00	21.65	19.30	12P	33.00	39.65	37.30
7P	18.00	24.65	22.30				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack YIn

Title :

3.00mm PITCH
90° SINGLE ROW
WAFER - SMT TYPE

A1	CHANGE THE Current Rating	2018.12.19	x.xx±0.25	PROJECT ⊕ ⊖
A0	NEW RELEASE	2009.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

DRAW NO : C3030WR-S-F-XP

REV
A1