

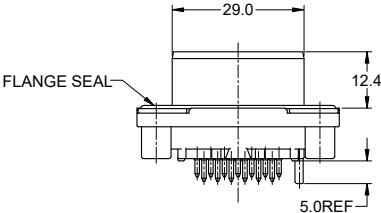
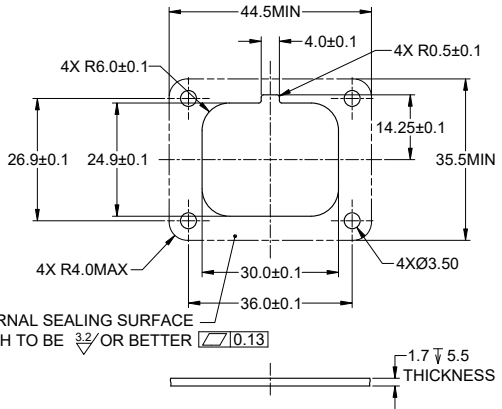



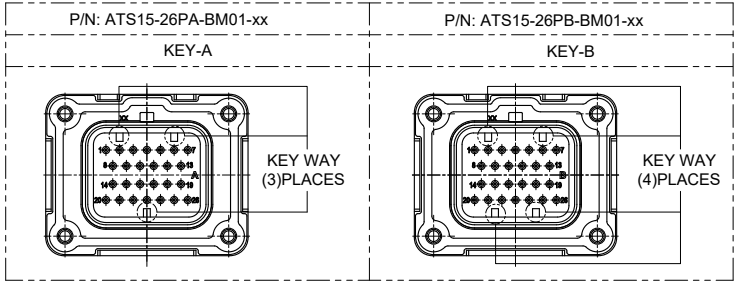


REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY
A1	--	RELEASED DRAWING	08/AUG/22	RONALD TOMMY
A2	--	UPDATE THE PRODUCT NAME	27/OCT/22	LUCAS TOMMY

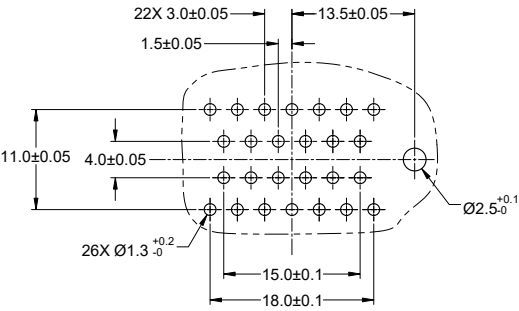

PART NUMBER CHART	
COLOR	PART NUMBER
BLACK	ATS15-26Px-BM01
GREY	ATS15-26Px-BM01-GY
GREEN	ATS15-26Px-BM01-GN
BROWN	ATS15-26Px-BM01-BN



NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC;
CONTACT: COPPER ALLOY,GOLD PLATING
SEAL: SILICONE RUBBER
- SPECIFICATIONS:
2.1 CURRENT RATING: 7.5AMPS MAX
2.2 OPERATING TEMPERATURE: -55°C TO +125°C
2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
2.5 MOISTURE RESISTANCE: IP67&IP69K (MATED CONDITION)
2.6 MATING CYCLE DURABILITY: 500 MIN CYCLES
2.7 RoHS COMPLIANT
- MATING PART: ATS06-26Sx-* PLUG
(x = A,B KEYS ; * = ALL MODIFICATIONS)
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

SEE P/N CHART		REF: 6437288-6, 6473418-1 (MATING INTERFACE ONLY)	
QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions: ±1/64 2 PL DEC ±0.15 Angles ±1° 3 PL DEC ±0.08 3) Note reference = 		SIGNATURES DATE DRAWN: LUCAS27/OCT/22 CHECKED: ORION30/OCT/22 ENGINEER: APPROVAL: TOMMY31/OCT/22 CUSTOMER:	
MATERIAL SPECIFICATIONS: WEIGHT: 16.2g		Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036	
PROCESS SPECIFICATIONS: NEXT ASSY:		26 POS, PCB RECEPT W/ FLANGE, PIN, ATS SERIES, W/BOARDLOCK, PANEL, STRAIGHT SIZE: TYPE: DWG NO: B C- ATS15-26Px-BM01-xx REVISION: A2 SCALE: NONE SHEET 1 OF 1	