

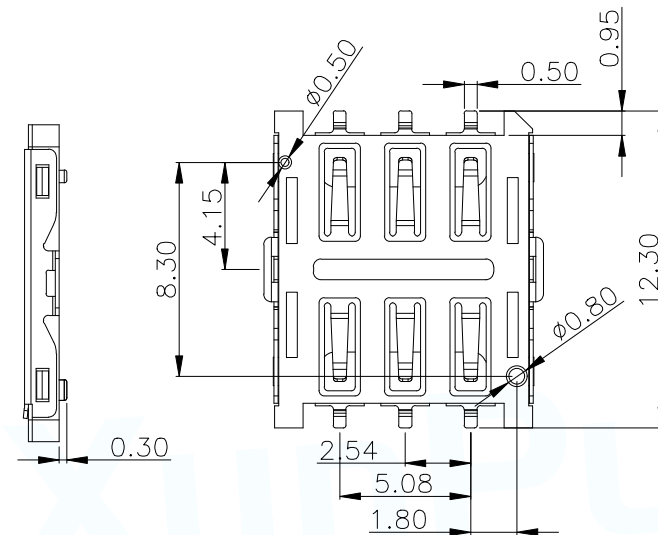
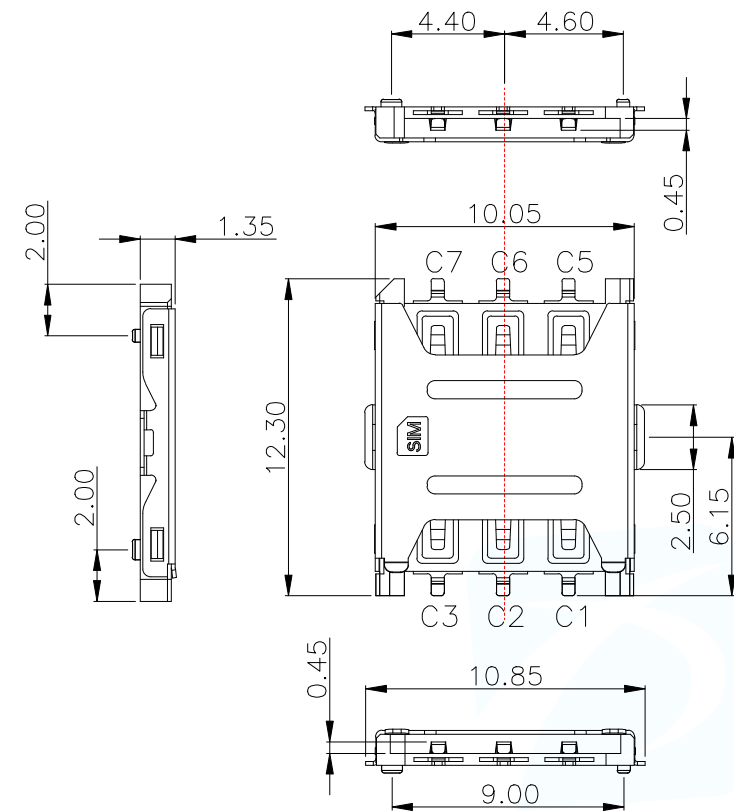


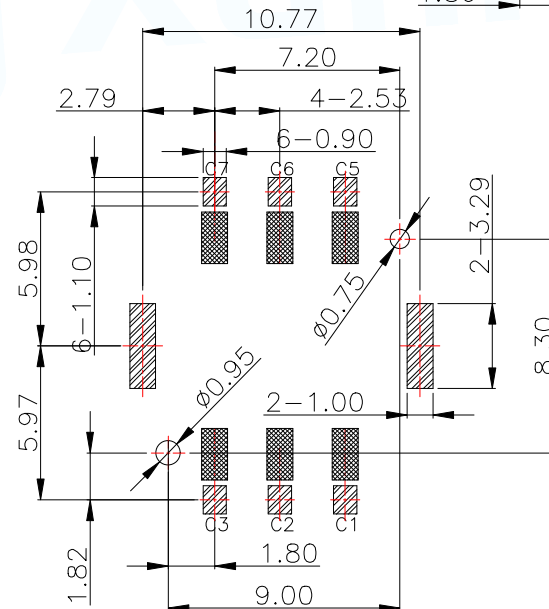

SPECIFICATION
MATERIAL:
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC,UL 94V-0.
CONTACT: C5210
SHELL: SUS
PLATING:
CONTACT: PLATED 50U" NI OVERALL CONTACT ALL AU 1U
SHELL: PLATED 50U" NI OVERALL,PAD AU 1U
ELECTRICAL:
CURRENT RATING: 0.5MA AC/DC MAX
VOLTAGE RATING: 125V AC/DC
AMBIENT TEMPERATURE RANGE: -20°C~+60°C
STORAGE TEMPERATURE RANGE: -40°C~+70°C
AMBIENT HUMIDITY RANGE: 95% R.H. MAX.
CONTACT RESISTANCE: 100MΩMAX.
INSULATION RESISTANCE: 1000MΩMIN./500VDC
REFLOW PEAK TEMP: 260°C ±5°C, 3~5 S
MATING CYCLES: 3,000 INSERTIONS MIN

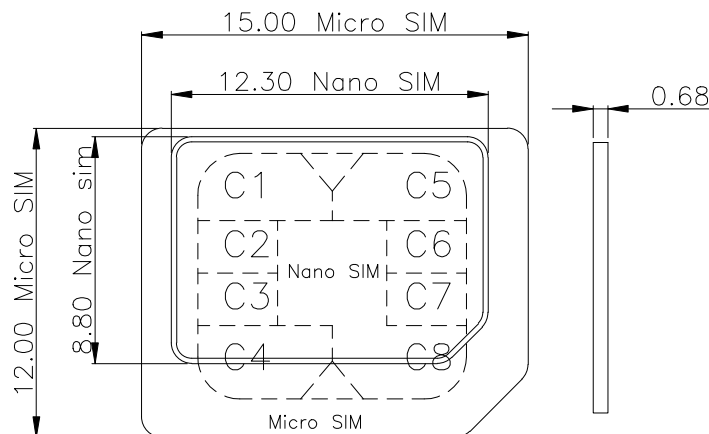


PAD AREA

KEEP OUT AREA

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ±0.05

NANO SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A



MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:

X.:±0.50

X.X:±0.30

X.XX:±0.20

ANGLES:

X':±2°


X.X':±1°

X.XX':±0.5°

TITLE:NANO SIM CARD PUSH
PULL 6PIN H1.35带柱


PAR	SMN-304-ACP6
DWN	
CHKD	
APVD	
SCALE1:1	UNIT:MM
SIZE:A4	SHEET:1F1
CUSTOMER COPY	REV:A

User Direction of Unreeling

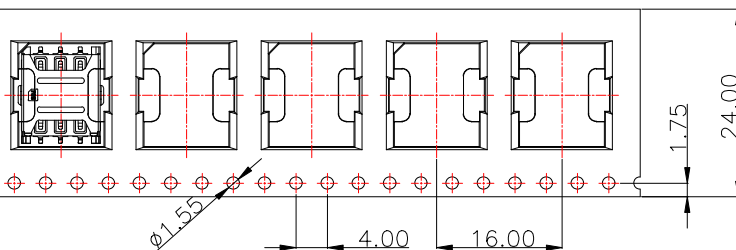

NOTES

1. NUMBER OF CONNECTORS:1800PCS/REEL
2. LEAD TAPE LENGTH

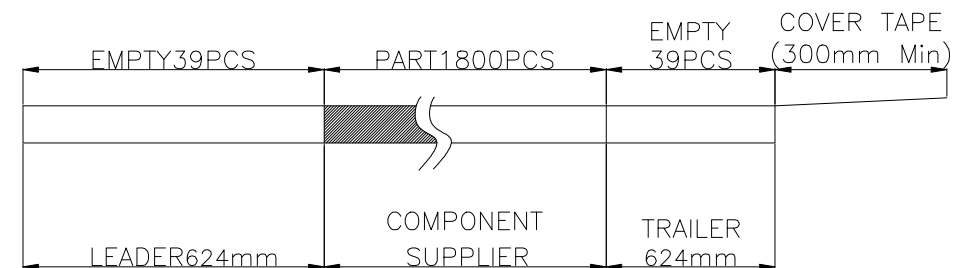


3. QUANTITY:18000PCS/CARTON

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

CARRIER TAPE


User Direction of Unreeling

DETAIL B

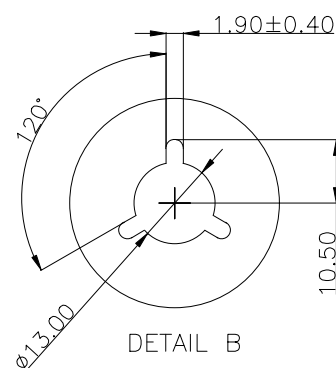

DETAIL B

10-REEL

CARTON
345*345*310 K=K

Polybag

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:NANO SIM CARD PUSH PULL 6PIN H1.35带柱 包装图		
			PAR	SMN-304-ACP6	
DECIMALS:	ANGLES:		DWN		
X.:±0.50	X.:±2°		CHKD		
X.X:±0.30	X.X:±1°		APVD		
X.XX:±0.20	X.XX:±0.5°		SCALE1:1	UNIT:MM	
			CUSTOMER COPY	SIZE:A4	SHEET:1F1