


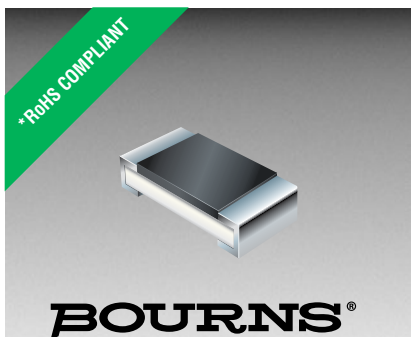

Features

- RoHS compliant*
- Small package dimensions
- Power rating at 70 °C = 1/20 W
- Three layer termination process with nickel barrier helps prevent leaching and provides excellent solderability

- Suitable for most types of soldering processes
- Standard packaging on paper tape and reel
- Sulfur-resistant design

BOURNS®

CR0201-AS Series - Sulfur-Resistant Thick Film Chip Resistors

General Characteristics

Characteristic	CR0201-AS
Power Rating @ 70 °C per Resistor	0.05 W
Resistor Tolerance	±1 %, ±5 %
Resistance Range - 1 % Tolerance (E24 + E96)	10 ohms to 2 megohms
Resistance Range - 5 % Tolerance (E24), Zero-ohm Jumper	1 ohm to 10 megohms, 0 ohms
Temperature Coefficient of Resistance (TCR)	
1 % Tolerance	±200 ppm/°C
5 % Tolerance	±200 ppm/°C**
Zero-ohm Jumper	N/A
Maximum Overload Voltage	50 V
Maximum Working Voltage	25 V
Operating Temperature Range	-55 to +125 °C
Storage Conditions	+5 ~ +40 °C, 25~75 % RH, 1 year
Derating Temperature	+70 °C
Packaging (Paper Tape)	15,000 pcs. per reel
Zero-ohm Jumper:	
Current Rating	1 A per element
Maximum Resistance	100 milliohms


**TCR for 1 ohm to 9.1 ohm resistance range, 5 % tolerance is -600 to +100 ppm/°C.

Environmental Characteristics

Specification	Test Method (JIS C 5201-1)	Characteristics
Short Time Overload	Rated voltage x 2.5, 5 seconds	±(2 % +0.1 ohm)
Soldering Heat	+260 °C ±5 °C, 10 ±1 seconds	±(2 % +0.1 ohm)
Temperature Cycling	-55 °C (30 minutes) - normal (2~3 minutes) +125 °C (30 minutes) - normal (2~3 minutes), 5 cycles	±(5 % +0.05 ohm)
Moisture Load Life	+40 °C, 90~95 % RH, 1000 hours, 1.5 hours ON, 0.5 hours OFF	±(5 % +0.1 ohm)
Load Life	+70 °C, 1000 hours, 1.5 hours ON, 0.5 hours OFF	±(5 % +0.1 ohm)
Sulfur Test	3 ppm H ₂ S, +50 °C, 90~95 % RH, 100 hours	±(5 % +0.1 ohm)

NOTE: Zero-ohm jumper ≤100 milliohms.

Soldering Profile

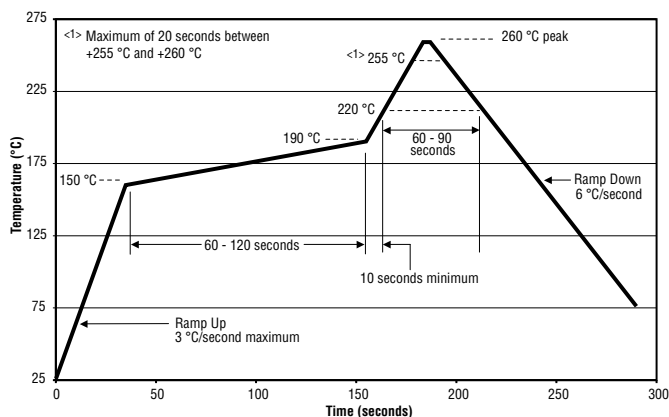


How To Order

CR 0201 - F W - 1002 G AS

- Chip Resistor
- Size
- 0201
- Tolerance
- F = 1 %
 - J = 5 %
- TCR (ppm/°C)
- W = ±200
 - / = N/A (for Jumper & R<10 ohms)
- Resistance Code
- For 1 % Tolerance
 - <100 ohms: "R" designates decimal point (example: 24R3 = 24.3 ohms)
 - ≥100 ohms: First three digits are significant, fourth digit represents number of zeros to follow (example: 8252 = 82.5K ohms)
 - For 5 % Tolerance
 - <10 ohms: "R" designates decimal point (example: 4R7 = 4.7 ohms)
 - ≥10 ohms: First two digits are significant, third digit represents number of zeros to follow (example: 474 = 470K ohms; 000 = Zero-ohm jumper)
- Packaging
- G = Paper Tape (15,000 pcs. on 7-inch plastic reel)
- Special Characteristics
- AS = Sulfur-resistant, Tin-plated terminations (RoHS compliant)

For Standard Values Used in Capacitors, Inductors, and Resistors, [click here](#).

Construction

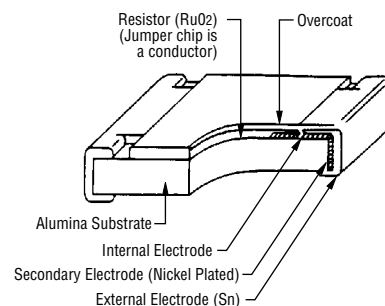

* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

CR0201-AS Series - Sulfur-Resistant Thick Film Chip Resistors

BOURNS®

Derating Curve

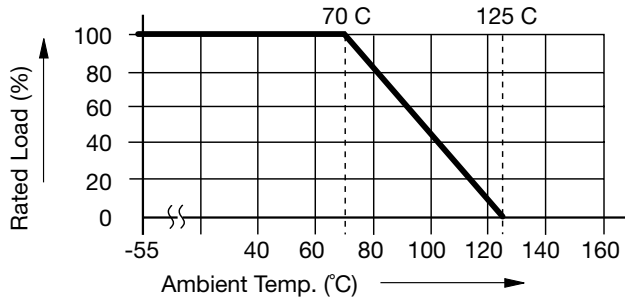


Typical Part Marking


..... No Marking

Product Dimensions


Dim.	CR0201-AS
L	0.60 ± 0.03 (0.024 ± 0.001)
W	0.30 ± 0.03 (0.012 ± 0.001)
C	0.12 ± 0.05 (0.004 ± 0.002)
D	0.15 ± 0.05 (0.006 ± 0.002)
T	0.23 ± 0.03 (0.009 ± 0.001)

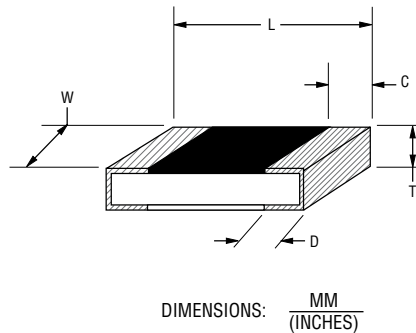

Recommended Land Pattern



Packaging Specifications

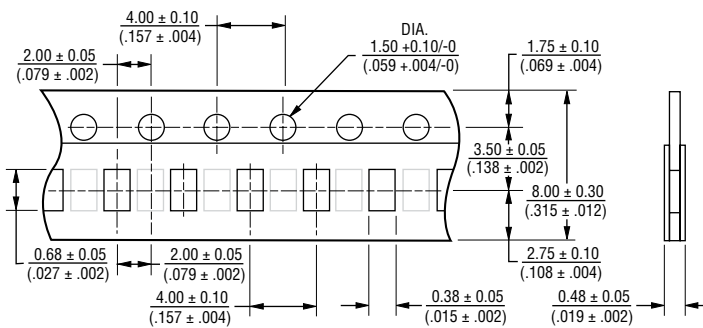

Reel Diameter: $\frac{180}{(7.087)}$

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 520 390 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[CR0201-FW-2152GAS](#) [CR0201-JW-750GAS](#) [CR0201-FW-4642GAS](#) [CR0201-FW-6342GAS](#) [CR0201-FW-49R9GAS](#)
[CR0201-JW-150GAS](#) [CR0201-FW-2263GAS](#) [CR0201-JW-360GAS](#) [CR0201-FW-2001GAS](#) [CR0201-FW-7502GAS](#)
[CR0201-JW-103GAS](#) [CR0201-FW-2003GAS](#) [CR0201-FW-1693GAS](#) [CR0201-FW-8452GAS](#) [CR0201-FW-1153GAS](#)
[CR0201-FW-2203GAS](#) [CR0201-JW-300GAS](#) [CR0201-FW-4533GAS](#) [CR0201-FW-3321GAS](#) [CR0201-FW-3093GAS](#)
[CR0201-FW-1273GAS](#) [CR0201-FW-2400GAS](#) [CR0201-FW-8873GAS](#) [CR0201-FW-4751GAS](#) [CR0201-FW-2802GAS](#)
[CR0201-FW-1203GAS](#) [CR0201-FW-1001GAS](#) [CR0201-FW-3740GAS](#) [CR0201-FW-6041GAS](#) [CR0201-FW-](#)
[3011GAS](#) [CR0201-FW-4273GAS](#) [CR0201-FW-2492GAS](#) [CR0201-JW-105GAS](#) [CR0201-FW-4703GAS](#) [CR0201-FW-](#)
[4023GAS](#) [CR0201-FW-3832GAS](#) [CR0201-FW-8063GAS](#) [CR0201-FW-2262GAS](#) [CR0201-JW-100GAS](#) [CR0201-JW-](#)
[560GAS](#) [CR0201-FW-5492GAS](#) [CR0201-J/-000GAS](#) [CR0201-FW-1241GAS](#) [CR0201-JW-271GAS](#) [CR0201-FW-](#)
[9103GAS](#) [CR0201-FW-1692GAS](#) [CR0201-JW-301GAS](#) [CR0201-FW-7682GAS](#) [CR0201-FW-7873GAS](#) [CR0201-JW-](#)
[121GAS](#) [CR0201-JW-390GAS](#) [CR0201-FW-1000GAS](#) [CR0201-FW-3000GAS](#) [CR0201-FW-6491GAS](#) [CR0201-FW-](#)
[3002GAS](#) [CR0201-JW-511GAS](#) [CR0201-FW-4753GAS](#) [CR0201-FW-1003GAS](#) [CR0201-FW-1503GAS](#) [CR0201-FW-](#)
[8062GAS](#) [CR0201-FW-4752GAS](#) [CR0201-JW-220GAS](#) [CR0201-FW-1002GAS](#) [CR0201-JW-203GAS](#) [CR0201-J/-](#)
[1R0GAS](#) [CR0201-JW-472GAS](#) [CR0201-JW-112GAS](#)