




Relays & Contactors > Relays > Signal Relays > Small Signal Relay, Axicom P2 Standard

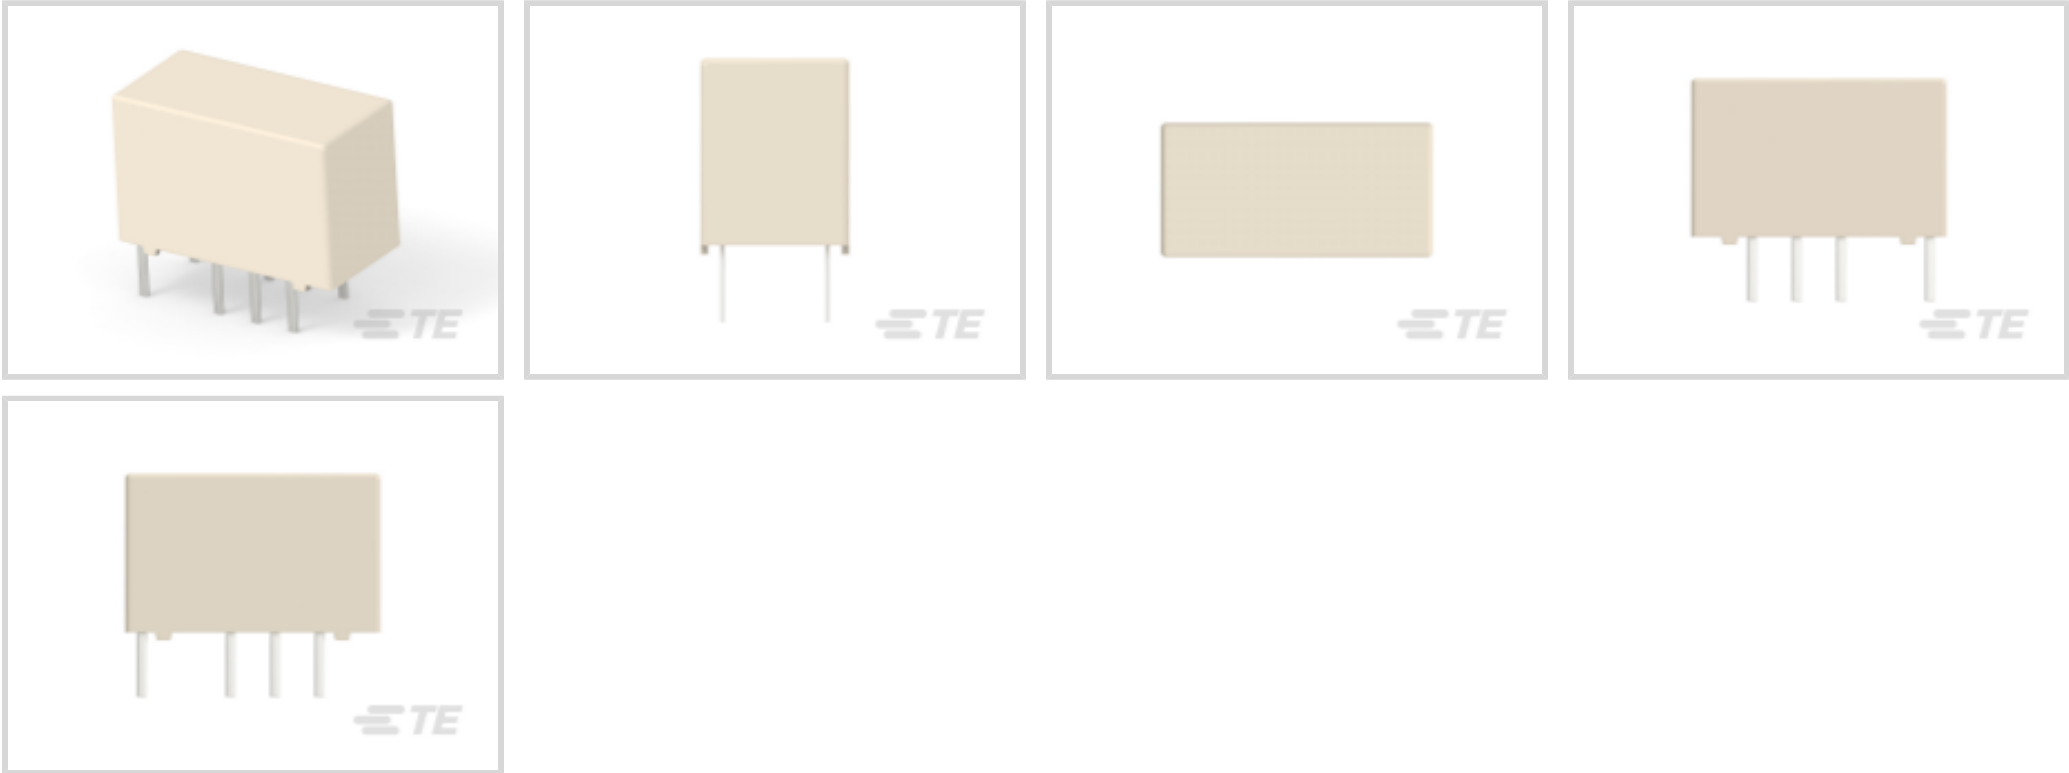

Relay Type: **General Purpose Signal Relay**
Contact Arrangement: **2 Form C DPDT-CO**
Coil Magnetic System: **Bistable, 2 Coils, Polarized**
Contact Current Rating: **2 A**
Performance Type: **Standard**

[All Small Signal Relay, Axicom P2 Standard \(30\)](#)

Features

Product Type Features

Relay Type	General Purpose Signal Relay
------------	------------------------------

Configuration Features

Contact Special Features	Bifurcated/Twin Contacts
Coil Special Features	Overmolded Coil
Contact Arrangement	2 Form C DPDT-CO
Contact Number of Poles	2

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	2 A
Contact Limiting Short-Time Current	2 A
Contact Limiting Continuous Current	2 A
Voltage Standing Wave Ration (HF Parameter)	1.04 @ 100MHz, 1.4dB @ 900MHz
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms



Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
Contact Limiting Breaking Current	2 A
Contact Switching Load (Min)	10mA @ .2V
Coil Resistance	64 Ω
Contact Current Rating	2 A
Contact Voltage Rating	220 VDC
Coil Power Rating DC	.14 W
Coil Voltage Rating	3 VDC
Contact Switching Voltage (Max)	250 VAC

Body Features

Product Weight	2.8 g[.0988 oz]
----------------	-----------------

Contact Features

Contact Plating Material	Gold
Contact Material	AgNi+Au

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	PCB Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	1.3 mm[.051 in]
Insulation Creepage Between Contact & Coil	2.5 mm[.098 in]
Product Width	7.2 mm[.283 in]
Product Length	14.6 mm[.574 in]
Product Height	9.5 mm[.374 in]

Usage Conditions

Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[85 °F]
Operating Temperature Range	-40 – 85 °C

Operation/Application

Current Type	DC
Solder Process	Wave Solder



Coil Magnetic System	Bistable, 2 Coils, Polarized
Performance Type	Standard

Packaging Features

Packaging Method	Box & Carton
------------------	--------------

Other

Length Class (Mechanical)	14 – 16 mm
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	9 – 10 mm
Coil Power Rating Class	.1 – .15 W
Width Class (Mechanical)	6 – 8 mm
Contact Current Class	0 – 2 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 4-1393788-1
V23079B1208B301

Also in the Series

Axicom P2 Signal Relay

Signal Relays(56)

Customers Also Bought

TE Part #5227161-1
RTANG JK W/MTG PINS, BNC PCB

TE Part #3-1461491-3
PCN-112D3MHZ,000

TE Part #5103308-1
A/L LOW PRO HDR 10P VERT BLACK

TE Part #1825027-5
FSMRA2JH04=R/A,TACT PB SW,160G

TE Part #641937-1
03P MTA156 HDR ASSY STR W/O#2

TE Part #1969730-6
EP2.5 SHROUDED HDR ASSY 6P VERTICAL

TE Part #2132230-8
EP2.5 Shrouded HDR ASSY 8P VER

TE Part #1-1744524-2
EP 12P HEADER ASY NO 2,6 PINS



Documents

Product Drawings

V23079B2208B301

English

V23079B2208B301

English

CAD Files

Customer View Model

ENG_CVM_1393789-5_A5.3d_igs.zip

English

Customer View Model

ENG_CVM_1393789-5_A5.3d_stp.zip

English

Customer View Model

ENG_CVM_1393789-5_A5.2d_dxf.zip

English

3D PDF

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1422002-0_E1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1422002-0_E1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1422002-0_E1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Transportation, Storage, Handling, Assembly and Testing of Axicom Through Hole Terminal (THT) Relays

English

Transportation, Storage, Handling, Assembly and Testing of AXICOM THT Relays



English

[AXICOM Latching Relays](#)

English

[P2 Relay Datasheet](#)

English

[Product Specifications](#)

[Definitions General Purpose Relays](#)

English

[Agency Approvals](#)

[UL](#)

English