

40×40×28 mm

San Ace 40 9GE type



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-0)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 529.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass 55 g

Specifications

The models listed below **have pulse sensors with PWM control function.**

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9GE0412P3K03	12	10.8 to 13.2	100	0.84	10.08	16500	0.76	26.8	415	1.666	58	-20 to +60	40000/60°C
			0	0.07	0.84	3000	0.13	4.6	13	0.052	17		
9GE0412P3J03			100	0.65	7.8	15000	0.69	24.4	343.0	1.378	56		
			0	0.05	0.6	2650	0.12	4.2	10.7	0.042	14		
9GE0412P3G03			100	0.47	5.64	13000	0.6	21.2	260	1.044	52		
			0	0.05	0.6	2400	0.11	3.9	8.2	0.033	13		


* PWM frequency: 25 kHz

Other sensor specifications are available as options. Refer to the index (p. 553).


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9GE0412P3K03 With pulse sensor with PWM control function


PWM duty cycle

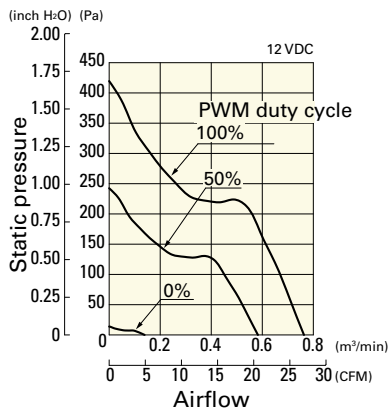

Operating voltage range

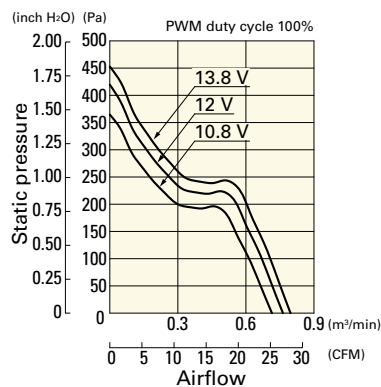


PWM duty - Speed characteristics example

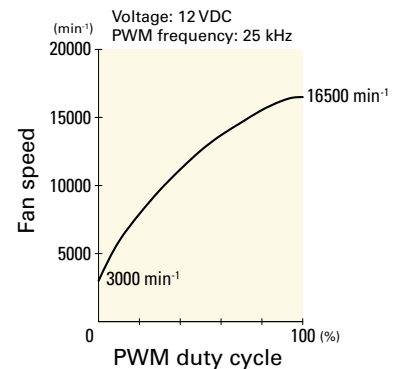


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9GE0412P3J03 With pulse sensor with PWM control function


PWM duty cycle

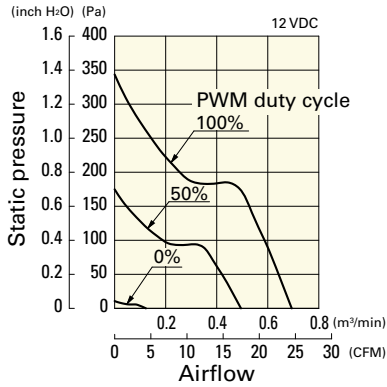

Operating voltage range

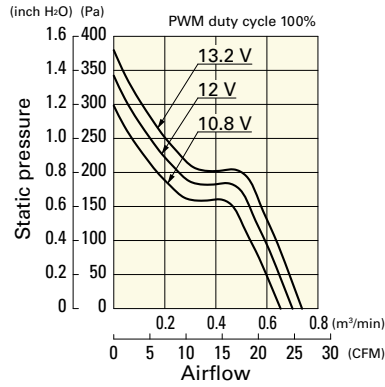


PWM duty - Speed characteristics example

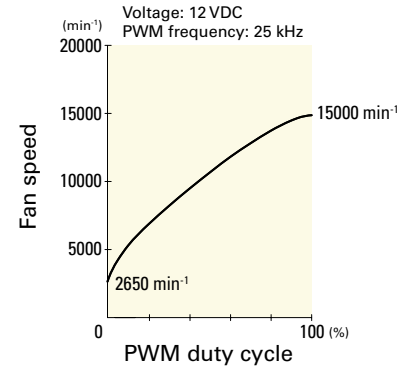


9GE0412P3G03 With pulse sensor with PWM control function


PWM duty cycle

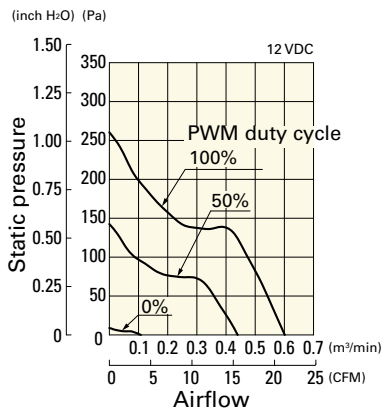


Operating voltage range

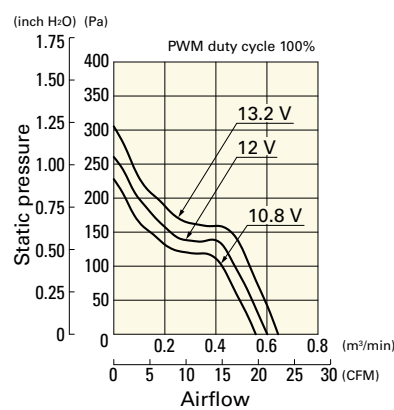


PWM duty - Speed characteristics example

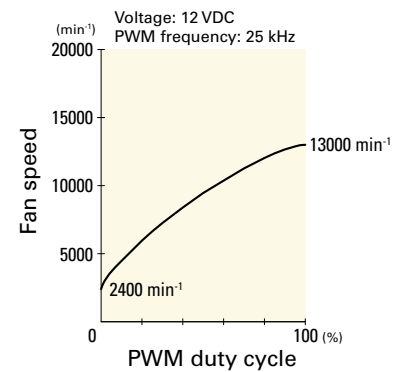

Dimensions (unit: mm)

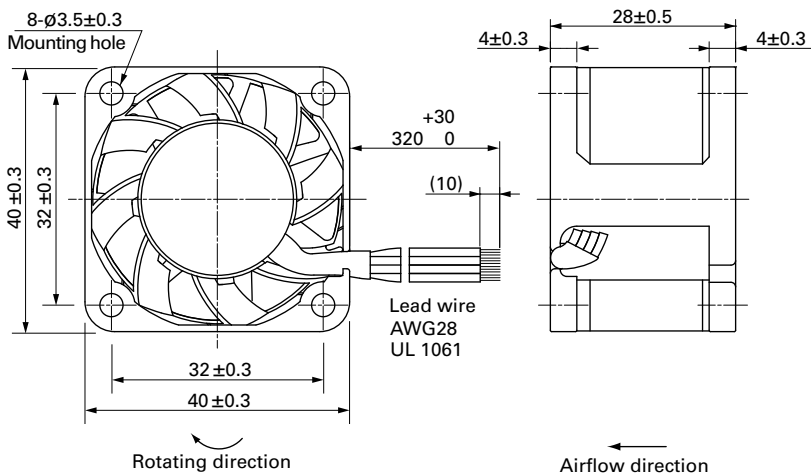

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

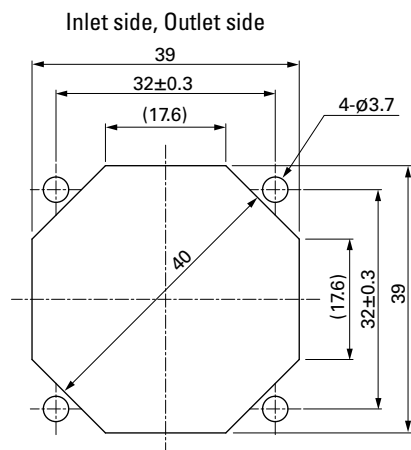

■ Options

Finger guards

page: p. 513

Model no.: 109-059, 109-059H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9GE0412P3G03](#) [9GE0412P3J03](#) [9GE0412P3K03](#) [9GE0412J301](#) [9GE0412K301](#) [9GE0412K3D01](#) [9GE0412J3D01](#)
[9GE0412G301](#) [9GE0412K302](#) [9GE0412J302](#) [9GE0412G302](#) [9GE0412G3D01](#)